




DL-29

120VAC PAR20 35W Halogen/11W LED
Down Light

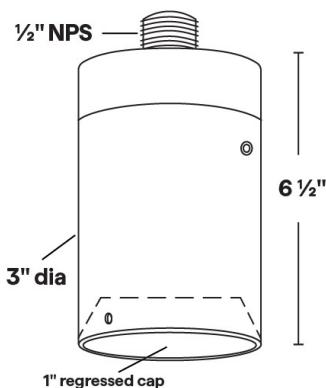

DL-29 Shown in Bronze Texture Powder Coat Finish (BZT)

Dimensions: 3" dia. x 6 1/2"

- 1" Regressed lens cap; holds up to one accessory
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 10" of 18ga. Teflon coated wire leads.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Maximum Wattage: 35W Halogen/8W LED
- Input Voltage: 120VAC
- Socket: Medium base ceramic
- Wet Listed
- Specification-grade, wet-location landscape luminaire for fixed downlighting applications. Can be utilized for pergola and other exterior installations.

| 1 PRODUCT | 2 MATERIAL | 3 MOUNTING PLATE | 4 STEM LENGTH | 5 FINISH |
|--------------|---------------|---------------------|------------------|-------------|
| DL-29 | A | | | |

Sample Part Number: DL-29-A-1-0-BK


| 1 PRODUCT | 2 MATERIAL | 3 MOUNTING PLATE | 4 STEM LENGTH | 5 FINISH |
|--------------|---------------|--|---|--|
| DL-29 | A Aluminum | <p>1 MT-24 2 MT-25 3 MT-26 4 MT-27</p> | <p>0 No Stem 3 3" Stem Length 6 6" Stem Length 9 9" Stem Length 12 12" Stem Length 18 18" Stem Length</p> | <p>BG Beige BB Black Bronze BK Black BKT Black Texture BZ Bronze BZT Bronze Texture SL Silver WH White</p> |

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance

**DL-29**

120VAC PAR20 35W Halogen/11W LED Down Light

1 PRODUCT - DIMENSIONS



2 MATERIAL



Aluminum

3 MOUNTING PLATE

1/2" NPS

Single Gang
Junction Box Cover

MT-24

4/0 Round
Mounting Plate

MT-25

4/0 Square
Mounting Plate

MT-26

3/0 Round
Mounting Plate

MT-27

4 FINISH

Eight Standard TGIC Free powder coat finishes



Beige

Black

Black Texture

Bronze



Bronze Texture

Black Bronze

Silver

White



DL-29

120VAC PAR20 35W Halogen/11W LED Down Light

ACCESSORIES - LENS

Holds up to one accessories

| SP | LI | SO | LV | WI | FR |
|--|--|---|--|--|---|
| | | | | | |
| Spread Lens To order separately use AY-1-PAR20-1 | Linear Lens To order separately use AY-1-PAR20-2 | Softening Lens To order separately use AY-1-PAR20-3 | Louver Lens To order separately use AY-1-PAR20-4 | Wire Holder To order separately use AY-1-PAR20-5 | Frosted Lens To order separately use AY-1-PAR20-6 |

LAMPS

PAR20 Halogen or LED; Medium base ceramic
Maximum wattage: 35W Halogen/11W LED

| PAR20 | PAR20 |
|----------------------|--------------------------------|
| | |
| SORAA VIVID 11.0W | SORAA BRILLIANT 8.5W, 11.0W |