




DL-30

120VAC PAR20 35W Halogen/11W LED
Down Light

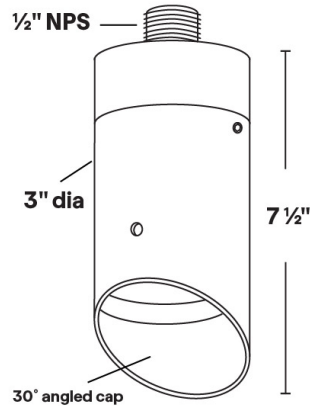

- 30° angled lens cap; holds up to one accessory
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 10" of 18ga. Teflon coated wire leads.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Maximum Wattage: 35W Halogen/8W LED
- Input Voltage: 120VAC
- Socket: Medium base ceramic
- Wet Listed
- Specification-grade, wet-location landscape luminaire for fixed downlighting applications. Can be utilized for pergola and other exterior installations.

DL-30 Shown in Bronze Texture Powder Coat Finish (BZT)

Dimensions: 3" dia. x 7 1/2"

1	2	3	4	5
PRODUCT	MATERIAL	MOUNTING PLATE	STEM LENGTH	FINISH
DL-30	A			

Sample Part Number: DL-30-A-1-0-BK

1	2	3	4	5
PRODUCT	MATERIAL	MOUNTING PLATE	STEM LENGTH	FINISH
DL-30	A Aluminum	1 MT-24 2 MT-25 3 MT-26 4 MT-27	0 No Stem 3 3" Stem Length 6 6" Stem Length 9 9" Stem Length 12 12" Stem Length 18 18" Stem Length	BG Beige BB Black Bronze BK Black BKT Black Texture BZ Bronze BZT Bronze Texture SL Silver WH White

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




DL-30

120VAC PAR20 35W Halogen/11W LED Down Light

1

PRODUCT - DIMENSIONS



2

MATERIAL



3

MOUNTING PLATE

1/2" NPS



Single Gang
Junction Box Cover
MT-24



4/0 Round
Mounting Plate
MT-25



4/0 Square
Mounting Plate
MT-26




3/0 Round
Mounting Plate
MT-27

4

FINISH

Eight Standard TGIC Free powder coat finishes

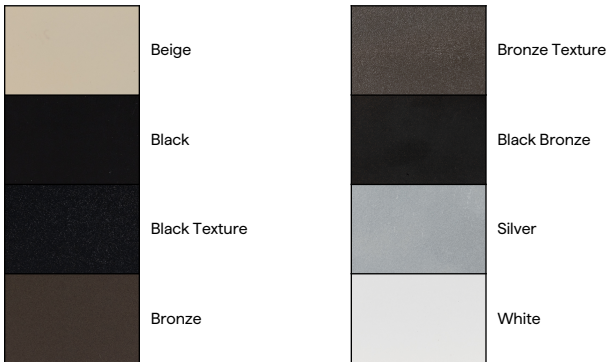









DL-30

120VAC PAR20 35W Halogen/11W LED Down Light

ACCESSORIES - LENS

Holds up to one accessories

<div>SP</div> <div></div> <div>Spread Lens</div> <div>To order separately use AY-1-PAR20-1</div>	<div>LI</div> <div></div> <div>Linear Lens</div> <div>To order separately use AY-1-PAR20-2</div>	<div>SO</div> <div></div> <div>Softening Lens</div> <div>To order separately use AY-1-PAR20-3</div>	<div>LV</div> <div></div> <div>Louver Lens</div> <div>To order separately use AY-1-PAR20-4</div>	<div>WI</div> <div></div> <div>Wire Holder</div> <div>To order separately use AY-1-PAR20-5</div>	<div>FR</div> <div></div> <div>Frosted Lens</div> <div>To order separately use AY-1-PAR20-6</div>
---	---	--	---	---	--

LAMPS

PAR20 Halogen or LED; Medium base ceramic
Maximum wattage: 35W Halogen/11W LED

<div>PAR20</div> <div></div> <div>SORAA VIVID</div> <div>11.0W</div>	<div>PAR20</div> <div></div> <div>SORAA BRILLIANT</div> <div>8.5W, 11.0W</div>
---	---