




TEST – ALUMINUM (5-Block)
12V MR16 35W, 8W LED Down Light

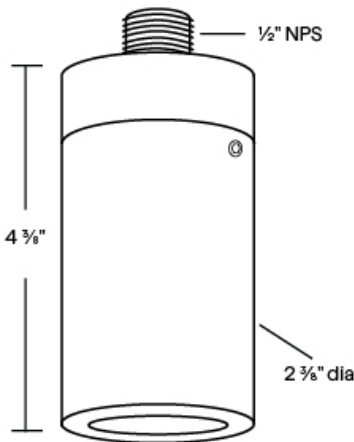

- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Remote transformer required.
- Stainless steel hardware.
- 10" 18ga. Teflon coated wire leads.
- GY 6.35 bi pi socket
- Tempered clear glass lens.
- Input Voltage: 12V (remote transformer required)
- Socket: GY-6.35 Bi Pin Porcelain
- IP Rating: 66
- Specification-grade landscape lighting, wet-location luminaire for up lighting or down lighting applications. Can be utilized for ground mounted, tree mounted or surface mounted installations.

DL-10 Shown in Bronze Texture Powder Coat Finish Weight: Aluminum .8lbsOverall Dimensions: 2 3/8" dia. x 4 3/8" long

1	2	3	4	5
PRODUCT	MATERIAL	MOUNTING PLATE	STEM LENGTH	FINISH
DL-10	A			

Sample Part Number: DL-10-A-1-6-BK

1	2	3	4	5
PRODUCT	MATERIAL	MOUNTING PLATE	STEM LENGTH	FINISH
<div>DL-10</div> <div>See chart for detailed visual explanation</div>	<div>A</div> <div>6061 - T6 Aluminum</div>	<div>1</div> 4/0 Round Mounting Plate <div>3</div> 3/0 Round Mounting Plate <div>3</div> Surface MT-11 <div>4</div> Surface MT-21	<div>0</div> No Stem <div>3</div> 3" Stem Length <div>6</div> 6" Stem Length <div>9</div> 9" Stem Length <div>12</div> 12" Stem Length <div>18</div> 18" Stem Length	<div>AC</div> Aged Copper <div>BG</div> Beige <div>BK</div> Black <div>BKT</div> Black Texture <div>BZ</div> Bronze <div>BZT</div> Bronze Texture <div>SL</div> Silver <div>WH</div> White


10 year warranty for aluminum | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



TEST – ALUMINUM (5-Block)


12V MR16 35W, 8W LED Down Light

1 PRODUCT - DIMENSIONS



4 FINISH

Seven standard TGIC powder coat finishes and clear anodized finish

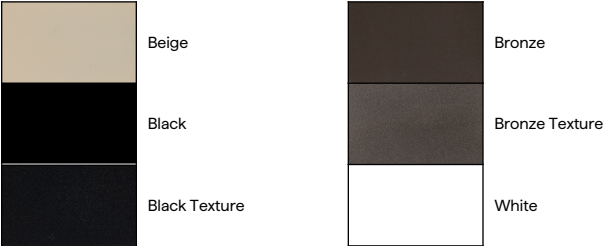

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS