




TEST – ALUMINUM (5-Block)
12V MR16 35W, 8W LED Down Light

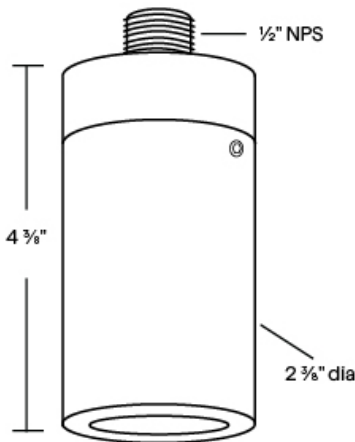

- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Remote transformer required.
- Stainless steel hardware.
- 10" 18ga. Teflon coated wire leads.
- GY 6.35 bi pi socket
- Tempered clear glass lens.
- Input Voltage: 12V (remote transformer required)
- Socket: GY-6.35 Bi Pin Porcelain
- IP Rating: 66
- Specification-grade landscape lighting, wet-location luminaire for up lighting or down lighting applications. Can be utilized for ground mounted, tree mounted or surface mounted installations.

DL-10 Shown in Bronze Texture Powder Coat Finish Weight: Aluminum .8lbsOverall Dimensions: 2 3/8" dia. x 4 3/8" long

1	2	3	4	5
PRODUCT	MATERIAL	MOUNTING PLATE	STEM LENGTH	FINISH
DL-10	A			

Sample Part Number: DL-10-A-1-6-BK


1	2	3	4	5
PRODUCT	MATERIAL	MOUNTING PLATE	STEM LENGTH	FINISH
<div>DL-10</div> <div>See chart for detailed visual explanation</div>	<div>A</div> <div>6061 - T6 Aluminum</div>	<div>1</div> 4/0 Round Mounting Plate <div>3</div> 3/0 Round Mounting Plate <div>3</div> Surface MT-11 <div>4</div> Surface MT-21	<div>0</div> No Stem <div>3</div> 3" Stem Length <div>6</div> 6" Stem Length <div>9</div> 9" Stem Length <div>12</div> 12" Stem Length <div>18</div> 18" Stem Length	<div>AC</div> Aged Copper <div>BG</div> Beige <div>BK</div> Black <div>BKT</div> Black Texture <div>BZ</div> Bronze <div>BZT</div> Bronze Texture <div>SL</div> Silver <div>WH</div> White



TEST – ALUMINUM (5-Block)

12V MR16 35W, 8W LED Down Light

1 PRODUCT - DIMENSIONS



2 MATERIAL




3 MOUNTING PLATE

1/2" NPS



4 FINISH

Seven standard TGIC powder coat finishes and clear anodized finish

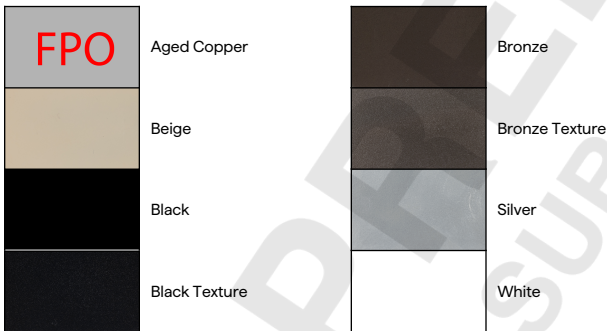











TEST – ALUMINUM (5-Block)

12V MR16 35W, 8W LED Down Light







ACCESSORIES - COLOR FILTERS

Holds up to one accessories Wire Filter Holder is included for each color filter to hold filter in place.

BL	LB	PK	AM	MV	RD	GR	DA
							
Blue Glass Filter	Light Blue Glass Filter	Pink Glass Filter	Amber Glass Filter	Mercury Vapor Glass Filter	Red Glass Filter	Green Glass Filter	Dichroic Amber Glass Filter
To order separately use AY-2-MR-16-BL	To order separately use AY-2-MR-16-LB	To order separately use AY-2-MR-16-PK	To order separately use AY-2-MR-16-AM	To order separately use AY-2-MR-16-MV	To order separately use AY-2-MR-16-RD	To order separately use AY-2-MR-16-GR	To order separately use AY-2-MR-16-DA

ACCESSORIES - LENS

Holds up to one accessories

SP	LI	SO	LV	WI	FR
					
Spread Lens	Linear Lens	Softening Lens	Louver Lens	Wire Holder	Frosted Lens
To order separately use AY-1-MR16-1	To order separately use AY-1-MR16-2	To order separately use AY-1-MR16-3	To order separately use AY-1-MR16-4	To order separately use AY-1-MR16-5	To order separately use AY-1-MR16-6

LAMPS

MR16	MR16	MR16	MR16
			
SORAA	DAUER	BRILLIANCE	EMERY ALLEN

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS