




RL-3
12V MR11 20W, 3W LED DownLight

10 YEAR
WARRANTY
ALUMINUM

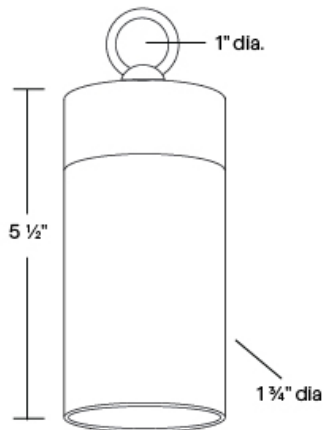

- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Remote transformer required.
- SS Cable and lead wire options.
- Stainless steel hardware.
- 1" brass loop for mounting. Hanging hook included.
- 12" 18 ga. shrink tube covered, black wire leads.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 20 watt, 3 watt LED
- Input Voltage: 12V (remote transformer required)
- Socket: GY 6.35 Bi-Pin Porcelain
- IP Rating: 66
- Specification-grade landscape lighting, wet-location luminaire for down lighting applications. Can be utilized for pergola or tree-mounted installations

RL-3 Shown in Bronze Texture Powder Coat Finish (BZ) Overall Dimensions: 1 3/4" dia. x 5 1/2" overall

1	2	3	4	5
PRODUCT	MATERIAL	SS CABLE	18/ 2 WIRE	FINISH
RL-3	A			

Sample Part Number: RL-3-A-0-0-BK

1	2	3	4	5
PRODUCT	MATERIAL	SS CABLE	18/2 WIRE	FINISH
RL-3	A 6061 - T6 Aluminum See Materials for Reference	0 No SS Cable 5 5' SS Cable 10 10' SS Cable 15 15' SS Cable 20 20' SS Cable 25 25' SS Cable 30 30' SS Cable	0 No Wire" 5 5' Wire 10 10' Wire 15 15' Wire 20 20' Wire 25 25' Wire 30 30' Wire	AC Aged Copper BG Beige BK Black BKT Black Texture BZ Bronze BZT Bronze Texture SL Silver WH White

10 year warranty for Aluminum | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




RL-3

12V MR11 20W, 3W LED DownLight

1

PRODUCT - DIMENSIONS



2

MATERIAL

See Materials for Reference




6061 - T6 Aluminum

5


FINISH

Seven standard TGIC powder coat finishes and clear anodized finish

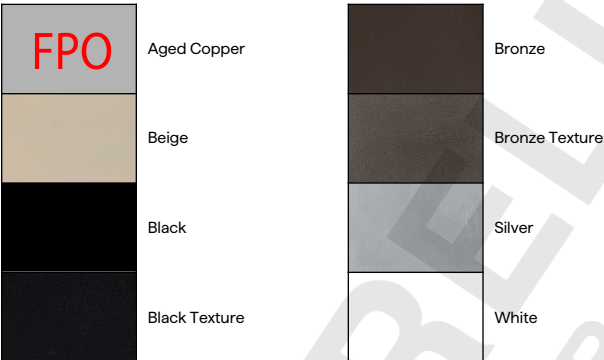

ACCESSORIES - COLOR FILTERS

Holds up to two accessories Wire Filter Holder is included for each color filter to hold filter in place.

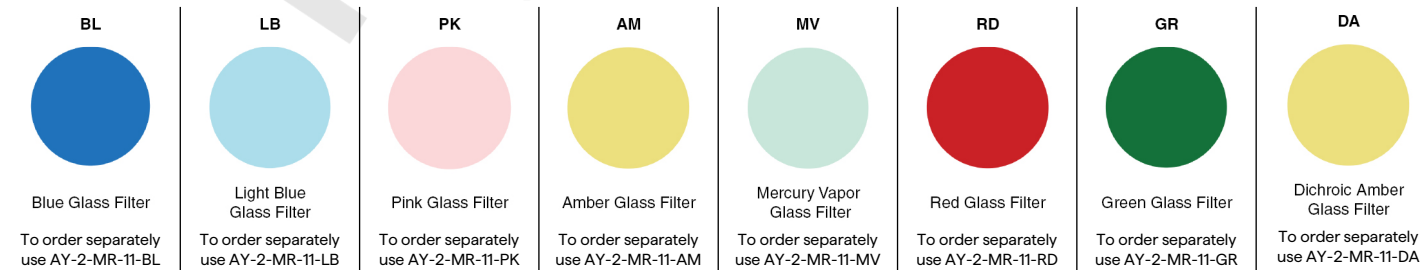









RL-3

12V MR11 20W, 3W LED DownLight

ACCESSORIES - LENS

Holds up to two accessories

<div>SP</div> <div></div> <div>Spread Lens</div> <div>To order separately use AY-1-MR11-1</div>	<div>LI</div> <div></div> <div>Linear Lens</div> <div>To order separately use AY-1-MR11-2</div>	<div>SO</div> <div></div> <div>Softening Lens</div> <div>To order separately use AY-1-MR11-3</div>	<div>LV</div> <div></div> <div>Louver Lens</div> <div>To order separately use AY-1-MR11-4</div>	<div>WI</div> <div></div> <div>Wire Holder</div> <div>To order separately use AY-1-MR11-5</div>	<div>FR</div> <div></div> <div>Frosted Lens</div> <div>To order separately use AY-1-MR11-6</div>
--	--	---	--	--	---

LAMPS

MR11 Halogen or LED; GY-6.35 Bi Pin Porcelain
Maximum wattage: 20 watt, 3 watt LED

<div>MR11</div> <div></div> <div>ELI</div>	<div>MR11</div> <div></div> <div>BRILLIANCE</div>	<div>MR11</div> <div></div> <div>EMERY ALLEN</div>
---	---	--

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS