




TEST - ALUMINUM (5a-Block)

12V MR8 20W, 3W LED Path Light

10 YEAR
WARRANTY
ALUMINUM

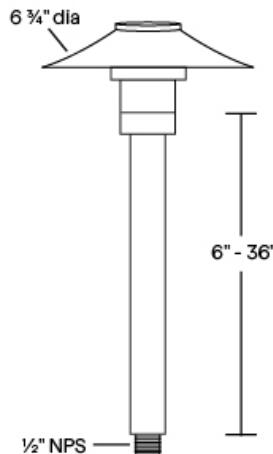

PL-23 Shown in Bronze Powder Coat Finish (BZ)

Weight: Aluminum: 1.6 lbs. Brass/Copper: 6.5 lbs. Overall Dimensions: 6 3/4" dia. shade, 1" dia. stem

- Machined aluminum, available in seven standard TGIC powder coat finishes and clear anodized finish.
- Machined brass or copper, available in two finishes.
- Remote transformer required.
- Stainless steel hardware.
- 6 feet of 18/2 low voltage cable supplied.
- Shade diameter of 6 3/4".
- Stems lengths of 6" - 36" available.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seals are used to seal the cap against the body.
- Molded silicone wire pass-thru is attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 20 watt, 3 watt LED (order separately)
- Input Voltage: 12V (remote transformer required)
- Socket: GY 6.35 Bi-Pin Porcelain
- IP Rating: 66
- Specification-grade landscape lighting, wet-location luminaire for path or garden lighting applications.

1 PRODUCT	2 MATERIAL	3 SHADE TOP	4 STEM LENGTH	5 FINISH
PL-23	A			

Sample Part Number: PL-23-A-D-12-BZT

1 PRODUCT	2 MATERIAL	3 SHADE TOP	4 STEM LENGTH	5 FINISH
PL-23	A Machined Aluminum	<ul style="list-style-type: none"> S Standard T Tall D Dome C Cone 	<ul style="list-style-type: none"> 6 6" Stem Length 9 9" Stem Length 12 12" Stem Length 18 18" Stem Length 24 24" Stem Length 30 30" Stem Length 36 36" Stem Length 42 42" Stem Length 48 48" Stem Length 	<ul style="list-style-type: none"> AC Aged Copper BG Beige BK Black BKT Black Texture BZ Bronze BZT Bronze Texture SL Silver WH White


10 year warranty for Aluminum | 25 year warranty for Brass | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



TEST – ALUMINUM (5a-Block)

12V MR8 20W, 3W LED Path Light

1 PRODUCT - DIMENSIONS



2 MATERIAL



Machined Aluminum

5 FINISH

Seven standard TGIC powder coat finishes and two bronze finishes



ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be order separately





TEST – ALUMINUM (5a-Block)

12V MR8 20W, 3W LED Path Light

LAMPS



COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS