




ST-12L

12VDC Box Mount

10 YEAR WARRANTY ALUMINUM 25 YEAR WARRANTY BRASS MADE IN AMERICA FROM DOMESTIC & FOREIGN PARTS

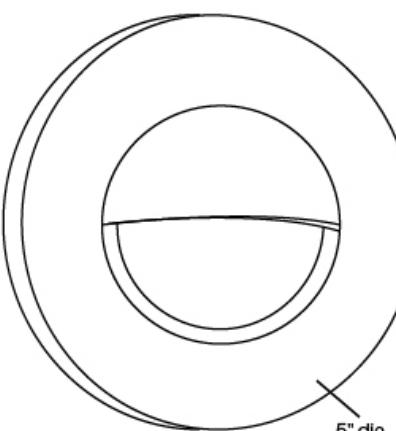

ST-12L is shown in Dark Bronze Powder Coat Finish (BZ)

Weight: 4.0lbs
Dimensions: 3" x 5" x 11/2" (faceplate)

- Machined aluminum, available in seven standard TGIC powder coat finishes and clear anodized finish.
- Machined brass available in two finishes.
- Remote transformer required.
- Stainless steel hardware.
- Clear lens.
- Single gang junction box design.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Input Voltage: 12VDC (remote magnetic transformer required)
- IP Rating: 66
- Specification-grade landscape lighting, wet-location luminaire for step lighting or path lighting applications.

| 1 PRODUCT | 2 MATERIAL | 3 WATTAGE | 4 CCT | 5 FINISH |
|--------------|---------------|--------------|----------|-------------|
| ST-12L | | | | |

Sample Part Number: ST-11L-A-2-27-BK

| 1 PRODUCT | 2 MATERIAL | 3 WATTAGE | 4 CCT | 5 FINISH |
|--|---|---|---|---|
| ST-12L <small>See chart for detailed visual explanation</small> | A Machined Aluminum B Machined Brass | 2 2 Watts 4 4 Watts <small>test note here</small> | 27 2700K 30 4000K <small>test note here</small> | AC Aged Copper BG Beige BK Black BKT Black Texture BZ Bronze BZT Bronze Texture DB Dark Bronze NT Natural SL Silver WH White |


10 year warranty for aluminum | 25 year warranty for brass | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




ST-12L

12VDC Box Mount

1 PRODUCT - DIMENSIONS



2 MATERIAL



Machined Aluminum

Machined Brass

5 FINISH

Standard TGIC powder coat finishes and Clear Anodized finish available



COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

| DIMMING PROTOCOL | OUTDOOR |
|------------------|--|
| | LANDSCAPE LIGHTING |
| Phase | Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS |