





ST-7L
12VDC Box Mount

10 YEAR
WARRANTY
ALUMINUM

25 YEAR
WARRANTY
BRASS

MADE IN AMERICA
FROM DOMESTIC &
FOREIGN PARTS

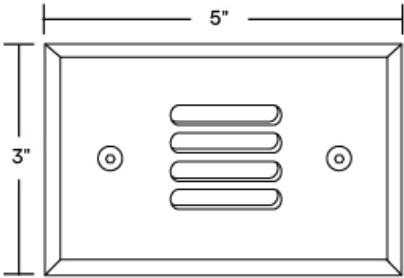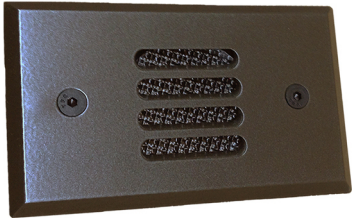

- Machined aluminum, available in seven standard TGIC powder coat finishes and clear anodized finish.
- Machined brass available in two finishes.
- Remote transformer required.
- Stainless steel hardware.
- Clear lens.
- Single gang junction box design.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Input Voltage: 12VDC (remote magnetic transformer required)
- IP Rating: 66
- Specification-grade landscape lighting, wet-location luminaire for step lighting or path lighting applications.

ST-7L is shown in Bronze Powder Coat Finish (BZ) Weight: 3.0lbs
Dimensions: 3" x 5" x 3/8" thick (faceplate) 2 7/8" H
x 4 5/8" W x 3 1/8" D (back box)

1	2	3	4	5
PRODUCT	MATERIAL	WATTAGE	CCT	FINISH
ST-7L				

Sample Part Number: ST-7L-A-2-27-BK


1	2	3	4	5
PRODUCT	MATERIAL	WATTAGE	CCT	FINISH
ST-7L See chart for detailed visual explanation	A Machined Aluminum B Machined Brass	2 2 Watts 4 4 Watts test note here	27 2700K 30 4000K test note here	AC Aged Copper BG Beige BK Black BKT Black Texture BZ Bronze BZT Bronze Texture DB Dark Bronze NT Natural SL Silver WH White

10 year warranty for aluminum | 25 year warranty for brass | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




ST-7L
12VDC Box Mount

1 PRODUCT - DIMENSIONS




2 MATERIAL



5 FINISH

Standard TGIC powder coat finishes and Clear Anodized finish available

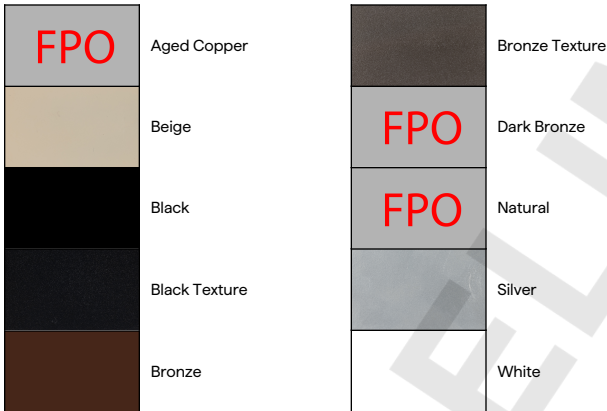

ACCESSORIES - COLOR FILTERS

Flush cap holds 3 lens accessories. Wire Filter Holder is included for each color filter to hold filter in place.

BL	LB	PK	AM	MV	RD	GR	DA
Blue Glass Filter	Light Blue Glass Filter	Pink Glass Filter	Amber Glass Filter	Mercury Vapor Glass Filter	Red Glass Filter	Green Glass Filter	Dichroic Amber Glass Filter
To order separately use AY-2-MR-16-BL	To order separately use AY-2-MR-16-LB	To order separately use AY-2-MR-16-PK	To order separately use AY-2-MR-16-AM	To order separately use AY-2-MR-16-MV	To order separately use AY-2-MR-16-RD	To order separately use AY-2-MR-16-GR	To order separately use AY-2-MR-16-DA




ST-7L
12VDC Box Mount

ACCESSORIES - LENS

Cap holds up to 3 accessories


SP



Spread Lens

To order separately
use AY-1-MR16-1


LI



Linear Lens

To order separately
use AY-1-MR16-2


LV



Louver Lens

To order separately
use AY-1-MR16-4


WI



Wire Holder

To order separately
use AY-1-MR16-5

FR



Frosted Lens

To order separately
use AY-1-MR16-6

ACCESSORIES - MOUNTING

MR16 Halogen or LED; GY-6.35 Bi Pin Porcelain Maximum wattage: 50 Watt, 8 Watt LED

MT-1



Ground Stake

Test Note Here

MT-2



Adjustable Ground Stake

Test Note Here

MT-6



Stainless Steel Ground Spike

Test Note Here

MT-11



Surface Mount Kit - 12V

Test Note Here

MT-14



Tree Strap with Canopy

Test Note Here

LAMPS

MR16



SORAA

MR16



DAUER

MR16



BRILLIANCE

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS