




TEST – BRASS (5L B-Block)

12VAC/DC MR16 9W LED Step Light



10 YEAR
WARRANTY
ALUMINUM

25 YEAR
WARRANTY
BRASS

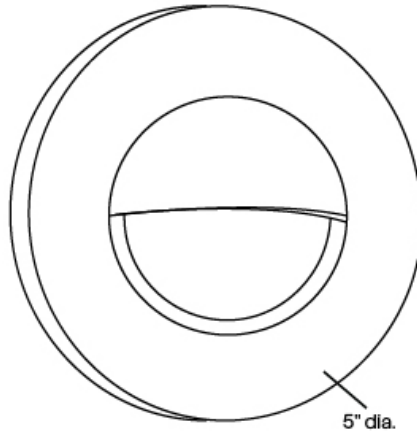

- Machined aluminum, available in seven standard TGIC powder coat finishes and clear anodized finish.
- Machined brass available in two finishes.
- Adjustable LED Module: 2W, 4W, 6W, 9W. (12W startup draw)
- CRI = 85
- Available in 2700K, 3000K, 4000K
- Remote magnetic transformer required.
- Not compatible with electronic transformers.
- IP 67 rated.
- Tempered crystalline spread lens.
- 6 feet of 16/2 low voltage cable supplied.
- Listed for wet location use.
- Warranty: Aluminum 10 Years, Brass 25 Years.

ST-14L Shown in Bronze Powder Coat Finish (BZ) Weight: Aluminum 3.0Overall Dimensions: 5" dia. faceplate, 6" overall length

1	2	3	4	5
PRODUCT	MATERIAL	EYELID STYLE	FINISH	LED LAMP
ST-14L	B		DB	

Sample Part Number: ST-14L-B-1-DB

1	PRODUCT	2	MATERIAL	3	EYELID STYLE	4	FINISH	5	LED LAMP																																
	ST-14L See chart for detailed visual explanation		B C36000 Brass		1 1/2 Eyelid Style 2 3/4 Eyelid Style		DB Dark Bronze		<table><tr><td>50</td><td>2W-9W, 15° Lens</td><td>2700K</td><td>165-720</td></tr><tr><td>51</td><td>2W-9W, 30° Lens</td><td>2700K</td><td>165-720</td></tr><tr><td>52</td><td>2W-9W, 45° Lens</td><td>2700K</td><td>165-720</td></tr><tr><td>60</td><td>2W-9W, 60° Lens</td><td>2700K</td><td>165-720</td></tr><tr><td>53</td><td>2W-9W, 15° Lens</td><td>3000K</td><td>190-800</td></tr><tr><td>54</td><td>2W-9W, 30° Lens</td><td>3000K</td><td>190-800</td></tr><tr><td>55</td><td>2W-9W, 45° Lens</td><td>3000K</td><td>190-800</td></tr><tr><td>61</td><td>2W-9W, 60° Lens</td><td>3000K</td><td>190-800</td></tr></table> CRI = 85 Adjustable LED Module	50	2W-9W, 15° Lens	2700K	165-720	51	2W-9W, 30° Lens	2700K	165-720	52	2W-9W, 45° Lens	2700K	165-720	60	2W-9W, 60° Lens	2700K	165-720	53	2W-9W, 15° Lens	3000K	190-800	54	2W-9W, 30° Lens	3000K	190-800	55	2W-9W, 45° Lens	3000K	190-800	61	2W-9W, 60° Lens	3000K	190-800
50	2W-9W, 15° Lens	2700K	165-720																																						
51	2W-9W, 30° Lens	2700K	165-720																																						
52	2W-9W, 45° Lens	2700K	165-720																																						
60	2W-9W, 60° Lens	2700K	165-720																																						
53	2W-9W, 15° Lens	3000K	190-800																																						
54	2W-9W, 30° Lens	3000K	190-800																																						
55	2W-9W, 45° Lens	3000K	190-800																																						
61	2W-9W, 60° Lens	3000K	190-800																																						


25 year warranty for brass | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



TEST – BRASS (5L B-Block)

12VAC/DC MR16 9W LED Step Light

1 PRODUCT - DIMENSIONS




2 MATERIAL



4 FINISH

Aluminum available in seven Standard TGIC powder coat and Clear Anodized finish. Bronze available in two finishes



COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS



9W MULT LEVEL LED

MR16 LED MODULE



9W Mult-Level - 2W, 4W, 6W, 9W
(165 - 860 Lumens)

- Equivalent to MR16 20W/35W/50W/75W Halogen (equivalent CBCP)
- Two lights levels, 2700K or 3000K
- 10.8-13.2V AC/DC
- 12W startup draw
- Interchangeable lens: 15°, 30°, 45°, 60°
- Superior Light Output and thermal performance compared to LED Replacement Lamps
- Compatible with low-voltage magnetic transformers
- Field replaceable
- Pb Free

LED MODULE SPECIFICATIONS

[Calculated L70 = 60000 hour]

LED MODULE	WATTAGE	CCT	LENS	2W	4W	6W	9W
50	2W-9W	2700K	15	165 Lumens	345 Lumens	515 Lumens	720 Lumens
51	2W-9W	2700K	30	165 Lumens	345 Lumens	515 Lumens	720 Lumens
52	2W-9W	2700K	45	165 Lumens	345 Lumens	515 Lumens	720 Lumens
60	2W-9W	2700K	60	165 Lumens	345 Lumens	515 Lumens	720 Lumens
53	2W-9W	3000K	15	190 Lumens	360 Lumens	530 Lumens	800 Lumens
54	2W-9W	3000K	30	190 Lumens	360 Lumens	530 Lumens	800 Lumens
55	2W-9W	3000K	45	190 Lumens	360 Lumens	530 Lumens	800 Lumens
61	2W-9W	3000K	60	190 Lumens	360 Lumens	530 Lumens	800 Lumens

LED LENS

MR16 Halogen or LED; GY-6.35 Bi Pin Porcelain
Maximum wattage: 50watt, 8 watt LED



15° Lens



45° Lens



30° Lens



60° Lens