


**WA-6L**

12VAC/DC MR16 9W LED Wall Mount



WA-6L Shown in Bronze Texture Powder Coat Finish (BZT)



Dimensions: 2 1/2" dia. x 6"

- 30° angled lens cap; holds up to two accessories.
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Not compatible with electronic transformers.
- Stainless steel hardware.
- 10" 18ga. Teflon coated wire leads.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Input Voltage: 12VAC/DC (remote magnetic transformer required)
- Socket: GU5.3 Bi Pin Porcelain
- Wet Listed
- Specification-grade, wet-location landscape luminaire for wall mounted fixed downlighting and uplighting applications.

1 PRODUCT	2 MATERIAL	3 MOUNTING PLATE	4 FINISH	5 WATTAGE	6 CCT	7 LENS
WA-6L	A			9.0		

Sample Part Number: **WA-6L-A-1-BK-9.0-30-15**

1 PRODUCT	2 MATERIAL	3 MOUNTING PLATE	4 FINISH	5 WATTAGE
WA-6L	A Aluminum	1 4/0 Round Mounting Plate 2 4/0 Square Mounting Plate 3 3/0 Round Mounting Plate	BG Beige BB Black Bronze BK Black BKT Black Texture BZ Bronze BZT Bronze Texture SL Silver WH White	9.0 9.0W
6 CCT	7 LENS			
27 2700K 30 3000K 40 4000K	15 15 Degree Lens 30 30 Degree Lens 45 45 Degree Lens 60 60 Degree Lens			


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



## WA-6L

### 12VAC/DC MR16 9W LED Wall Mount

#### 1 PRODUCT - DIMENSIONS

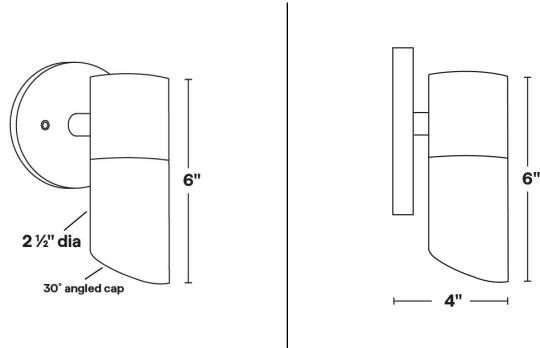

#### 2 MATERIAL



Aluminum

#### 3 MOUNTING PLATE

Three plate options



4/0 Round  
Mounting Plate  
5" diameter



4/0 Square  
Mounting Plate  
5" Square



3/0 Round  
Mounting Plate  
4" diameter

#### 4 FINISH

Eight Standard TGIC Free powder coat finishes



Beige

Black

Black Texture

Bronze



Bronze Texture

Black Bronze

Silver

White



## WA-6L

### 12VAC/DC MR16 9W LED Wall Mount

#### ACCESSORIES - COLOR FILTERS

Holds up to two accessories Wire Filter Holder is included for each color filter to hold filter in place.

BL Blue Glass Filter To order separately use AY-2-MR16-BL	LB Light Blue Glass Filter To order separately use AY-2-MR16-LB	PK Pink Glass Filter To order separately use AY-2-MR16-PK	AM Amber Glass Filter To order separately use AY-2-MR16-AM	MV Mercury Vapor Glass Filter To order separately use AY-2-MR16-MV	RD Red Glass Filter To order separately use AY-2-MR16-RD	GR Green Glass Filter To order separately use AY-2-MR16-GR	DA Dichroic Amber Glass Filter To order separately use AY-2-MR16-DA

#### ACCESSORIES - LENS

Holds up to two accessories

SP Spread Lens To order separately use AY-1-MR16-1	LI Linear Lens To order separately use AY-1-MR16-2	SO Softening Lens To order separately use AY-1-MR16-3	LV Louver Lens To order separately use AY-1-MR16-4	WI Wire Holder To order separately use AY-1-MR16-5	FR Frosted Lens To order separately use AY-1-MR16-6

#### COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS



## 9W LED MODULE

MR16 LED MODULE

3 YEAR  
WARRANTY



9W LED Module

- Equivalent to MR16 75W Halogen (equivalent CBCP)
- 2700K, 3000K, or 4000K
- 10.8-13.2V AC/DC
- 12W startup draw
- Interchangeable lens: 15°, 30°, 45°, 60°
- Compatible with low-voltage magnetic transformers
- Field replaceable

### LED MODULE SPECIFICATIONS

WATTAGE	LENS	2700K	3000K	4000K
9W	15°, 30°, 45°, 60°	810 Lumens	835 Lumens	855 Lumens

### LED LENS



15° Lens



30° Lens



45° Lens



60° Lens