


**WA-7L**

12VAC/DC MR16 9W LED Dual Wall Mount

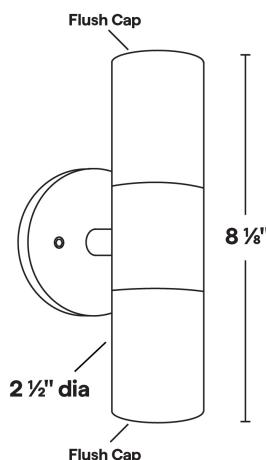

WA-7L Shown in Bronze Texture Powder Coat Finish (BZT)

Dimensions: 2 1/2" dia. x 8 1/8"

- Two Flush lens caps; holds up to two accessories
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 10" 18ga. Teflon coated wire leads.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Input Voltage: 12VAC/DC(remote transformer required)
- Socket: GU5.3 Bi Pin Porcelain
- Wet Listed
- Specification-grade, wet-location landscape luminaire for wall mounted fixed downlighting and uplighting applications.

1 PRODUCT	2 MATERIAL	3 MOUNTING PLATE	4 FINISH	5 WATTAGE	6 CCT	7 LENS
WA-7L	A			9.0		

Sample Part Number: WA-7L-A-1-BK-9.0-30-15

1 PRODUCT WA-7L	2 MATERIAL A Aluminum	3 MOUNTING PLATE 1 4/0 Round Mounting Plate 2 4/0 Square Mounting Plate 3 3/0 Round Mounting Plate	4 FINISH BG Beige BB Black Bronze BK Black BKT Black Texture BZ Bronze BZT Bronze Texture SL Silver WH White	5 WATTAGE 9.0 9.0W
6 CCT 27 2700K 30 3000K 40 4000K	7 LENS 15 15 Degree Lens 30 30 Degree Lens 45 45 Degree Lens 60 60 Degree Lens			


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



## WA-7L

### 12VAC/DC MR16 9W LED Dual Wall Mount

#### 1 PRODUCT - DIMENSIONS

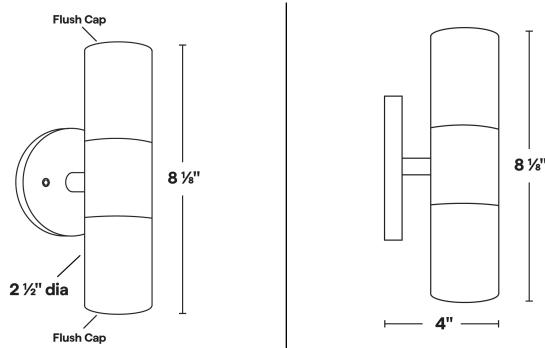

#### 2 MATERIAL



Aluminum

#### 3 MOUNTING PLATE

Three plate options



4/0 Round  
Mounting Plate  
5" diameter



4/0 Square  
Mounting Plate  
5" Square



3/0 Round  
Mounting Plate  
4" diameter

#### 4 FINISH

Eight Standard TGIC Free powder coat finishes



Beige

Black

Black Texture

Bronze



Bronze Texture

Black Bronze

Silver

White



## WA-7L

### 12VAC/DC MR16 9W LED Dual Wall Mount

#### ACCESSORIES - COLOR FILTERS

Holds up to two accessories Wire Filter Holder is included for each color filter to hold filter in place.

BL Blue Glass Filter	LB Light Blue Glass Filter	PK Pink Glass Filter	AM Amber Glass Filter	MV Mercury Vapor Glass Filter	RD Red Glass Filter	GR Green Glass Filter	DA Dichroic Amber Glass Filter
To order separately use AY-2-MR16-BL	To order separately use AY-2-MR16-LB	To order separately use AY-2-MR16-PK	To order separately use AY-2-MR16-AM	To order separately use AY-2-MR16-MV	To order separately use AY-2-MR16-RD	To order separately use AY-2-MR16-GR	To order separately use AY-2-MR16-DA

#### ACCESSORIES - LENS

Holds up to two accessories

SP Spread Lens	LI Linear Lens	SO Softening Lens	LV Louver Lens	WI Wire Holder	FR Frosted Lens
To order separately use AY-1-MR16-1	To order separately use AY-1-MR16-2	To order separately use AY-1-MR16-3	To order separately use AY-1-MR16-4	To order separately use AY-1-MR16-5	To order separately use AY-1-MR16-6

#### COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS



## 9W LED MODULE

MR16 LED MODULE

3 YEAR  
WARRANTY



9W LED Module

- Equivalent to MR16 75W Halogen (equivalent CBCP)
- 2700K, 3000K, or 4000K
- 10.8-13.2V AC/DC
- 12W startup draw
- Interchangeable lens: 15°, 30°, 45°, 60°
- Compatible with low-voltage magnetic transformers
- Field replaceable

### LED MODULE SPECIFICATIONS

WATTAGE	LENS	2700K	3000K	4000K
9W	15°, 30°, 45°, 60°	810 Lumens	835 Lumens	855 Lumens

### LED LENS



15° Lens



30° Lens



45° Lens



60° Lens