




PL-21

12V T4 35W, 4W LED Path Light



10 YEAR
WARRANTY
ALUMINUM

25 YEAR
WARRANTY
BRASS

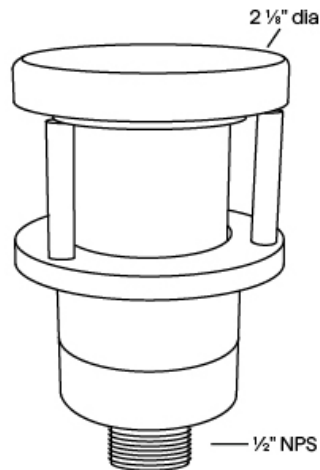

- Machined aluminum, available in seven standard TGIC powder coat finishes and clear anodized finish.
- Machined brass, available in two finishes.
- Stainless steel hardware.
- 6 feet of 18/2 low voltage cable supplied.
- Frosted or clear tempered glass lens, glued in.
- High-temperature silicone O-ring seals are used to seal the cap against the body.
- Molded silicone wire pass-thru is attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 35 watt, 4 watt LED (order separately)
- Input Voltage: 12V (remote transformer required)
- Socket: GY 6.35 Bi-Pin Porcelain
- IP Rating: 66
- Specification-grade landscape lighting, wet-location luminaire for path or garden lighting applications.

PL-21 Shown in Bronze Powder Coat Finish (BZ)

Dimensions: 2 1/8" dia. top, 1" dia. stem

1	2	3	4	5	6
PRODUCT	MATERIAL	LENS STYLE	SHADE TOP	STEM LENGTH	FINISH
PL-21					

Sample Part Number: **PL-21-A-F-S-6-BK**

1	PRODUCT
	PL-21

2	MATERIAL
A	Machined Aluminum
B	Machined Brass

3	LENS STYLE
F	Frosted
C	Clear
F	Frosted
C	Clear

4	SHADE TOP
S	Standard
T	Tall
D	Dome
C	Cone
S	Standard
T	Tall
D	Dome
C	Cone

5	STEM LENGTH
0	None
6	6" Stem Length
9	9" Stem Length
12	12" Stem Length
18	18" Stem Length
0	None
6	6" Stem Length
9	9" Stem Length
12	12" Stem Length
18	18" Stem Length


6	FINISH
BG	Beige
BK	Black
BKT	Black Texture
BZ	Bronze
BZT	Bronze Texture
SL	Silver
WH	White
DB	Dark Bronze
NT	Natural

10 year warranty for Aluminum | 25 year warranty for Brass | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




PL-21
12V T4 35W, 4W LED Path Light


1 PRODUCT - DIMENSIONS



2 MATERIAL




4 SHADE TOP

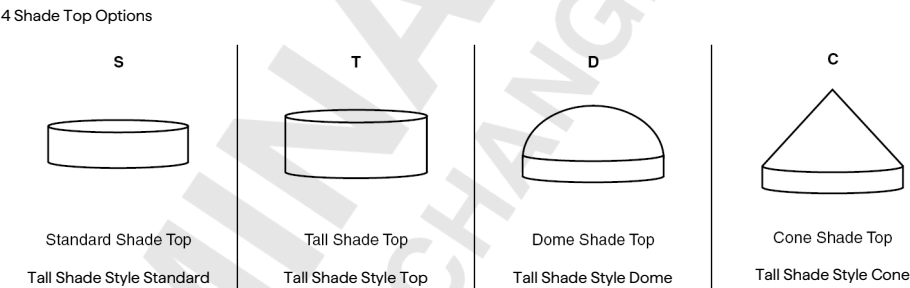

6 FINISH

Standard TGIC powder coat finishes and brass finish available

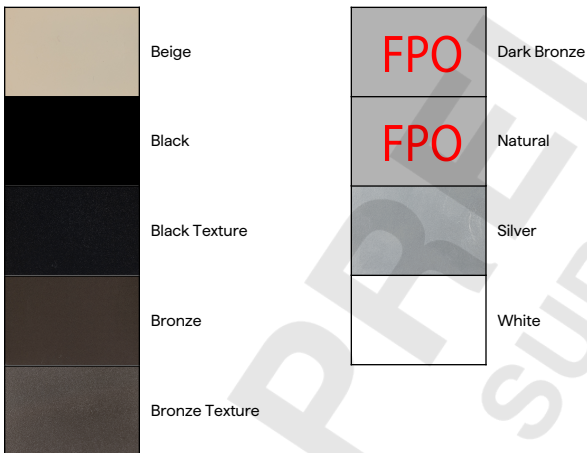




PL-21

12V T4 35W, 4W LED Path Light

ACCESSORIES - MOUNTING


1/2" NPS; Mount options must be order separately

MT-45




Ground Stake

MT-2




Adjustable Ground Stake

MT-6




Stainless Steel Ground Spike

MT-7



Stainless Steel Ground Spike

MT-8



Stainless Steel Ground Spike

LAMPS

T4 Halogen or LED; GY-6.35 Bi Pin Porcelain
Maximum wattage: 35 Watt, 4 Watt LED

T4



BRILLIANCE

T4



ELI

T4



JQ

T4



EMERY ALLEN

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS