




Row 1  
12V T4 35W, 4W LED Path Light



10 YEAR  
WARRANTY  
ALUMINUM

25 YEAR  
WARRANTY  
COPPER

25 YEAR  
WARRANTY  
BRASS

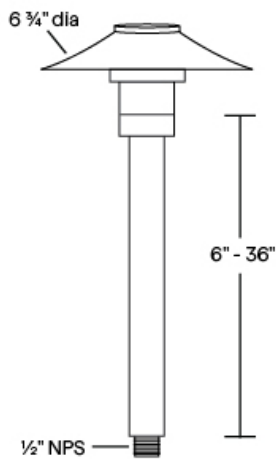

- Machined aluminum, available in seven standard TGIC powder coat finishes and clear anodized finish.
- Machined brass or copper, available in two finishes.
- Stainless steel hardware.
- 6 feet of 18/2 low voltage cable supplied.
- Frosted or clear tempered glass lens, glued in.
- High-temperature silicone O-ring seals are used to seal the cap against the body.
- Molded silicone wire pass-thru is attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 35 watt, 4 watt LED (order separately)
- Input Voltage: 12V (remote transformer required)
- Socket: GY 6.35 Bi-Pin Porcelain
- IP Rating: 66
- Specification-grade landscape lighting, wet-location luminaire for path or garden lighting applications.

PL-1 Shown in Bronze Powder Coat Finish (BZ)      Dimensions: Aluminum: 6 3/4" dia. shade, 1" dia. stem

1	2	3	4	5	6
PRODUCT	MATERIAL	LENS STYLE	SHADE TOP	STEM LENGTH	FINISH
PL-1	A				

Sample Part Number: PL-1-A-F-D-12-BZT

1	2	3	4	5	6
PRODUCT	MATERIAL	LENS STYLE	SHADE TOP	STEM LENGTH	FINISH
PL-1	A    Machined Aluminum	F    Frosted C    Clear	S    Standard T    Tall D    Dome C    Cone	6    6" Stem Length 9    9" Stem Length 12    12" Stem Length 18    18" Stem Length 24    24" Stem Length 30    30" Stem Length 36    36" Stem Length	BG    Beige BB    Black Bronze BK    Black BKT    Black Texture BZ    Bronze BZT    Bronze Texture SL    Silver WH    White

10 year warranty for Aluminum | 25 year warranty for Brass & Copper| Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




Row 1

12V T4 35W, 4W LED Path Light


1

PRODUCT - DIMENSIONS



2


MATERIAL



4

SHADE TOP

4 Shade Top Options

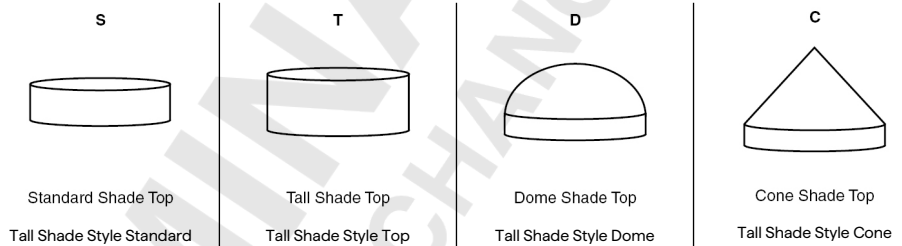

6

FINISH

Eight Standard TGIC powder coat finishes and Two brass finish available






**Row 1**  
12V T4 35W, 4W LED Path Light

**ACCESSORIES - MOUNTING**


1/2" NPS; Mount options must be order separately

MT-45




Ground Stake

MT-2




Adjustable Ground Stake

MT-6




Stainless Steel Ground Spike

MT-7



Stainless Steel Ground Spike

MT-8



Stainless Steel Ground Spike

**LAMPS**

T4 Halogen or LED; GY-6.35 Bi Pin Porcelain  
Maximum wattage: 35 Watt, 4 Watt LED

T4



EMERY ALLEN

**COMPATIBLE POWER SUPPLIES**

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS