



Row 3



12V T4 35W, 4W LED Path Light



10 YEAR
WARRANTY
ALUMINUM

25 YEAR
WARRANTY
COPPER

25 YEAR
WARRANTY
BRASS

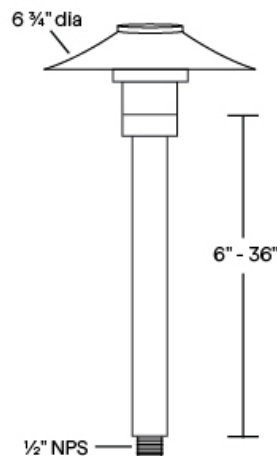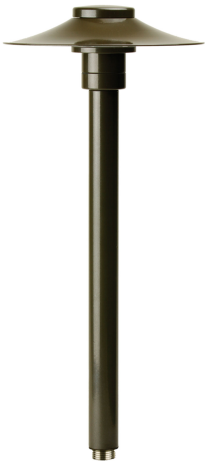

- Machined aluminum, available in seven standard TGIC powder coat finishes and clear anodized finish.
- Machined brass or copper, available in two finishes.
- Stainless steel hardware.
- 6 feet of 18/2 low voltage cable supplied.
- Frosted or clear tempered glass lens, glued in.
- High-temperature silicone O-ring seals are used to seal the cap against the body.
- Molded silicone wire pass-thru is attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 35 watt, 4 watt LED (order separately)
- Input Voltage: 12V (remote transformer required)
- Socket: GY 6.35 Bi-Pin Porcelain
- IP Rating: 66
- Specification-grade landscape lighting, wet-location luminaire for path or garden lighting applications.

PL-1 Shown in Bronze Powder Coat Finish (BZ)

Dimensions: Aluminum: 6 3/4" dia. shade, 1" dia. stem

1	2	3	4	5	6
PRODUCT	MATERIAL	LENS STYLE	SHADE TOP	STEM LENGTH	FINISH
PL-1					

Sample Part Number: PL-1-A-F-D-12-BZT

1	2	3	4	5	6
PRODUCT	MATERIAL	LENS STYLE	SHADE TOP	STEM LENGTH	FINISH
PL-1	A Machined Aluminum	F Frosted C Clear	S Standard T Tall D Dome C Cone	6 6" Stem Length 9 9" Stem Length 12 12" Stem Length 18 18" Stem Length 24 24" Stem Length 30 30" Stem Length 36 36" Stem Length	BG Beige BB Black Bronze BK Black BKT Black Texture BZ Bronze BZT Bronze Texture SL Silver WH White
	B Machined Brass	F Frosted C Clear	S Standard T Tall D Dome C Cone	6 6" Stem Length 9 9" Stem Length 12 12" Stem Length 18 18" Stem Length 24 24" Stem Length 30 30" Stem Length 36 36" Stem Length	AC Aged Copper BG Beige BB Black Bronze BK Black BKT Black Texture BZ Bronze BZT Bronze Texture SL Silver WH White
	C Machined Copper	F Frosted C Clear	S Standard T Tall D Dome C Cone	6 6" Stem Length 9 9" Stem Length 12 12" Stem Length 18 18" Stem Length 24 24" Stem Length 30 30" Stem Length 36 36" Stem Length	DB Dark Bronze NT Natural

10 year warranty for Aluminum | 25 year warranty for Brass & Copper | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




Row 3

12V T4 35W, 4W LED Path Light


1

PRODUCT - DIMENSIONS



2


MATERIAL



4

SHADE TOP

4 Shade Top Options

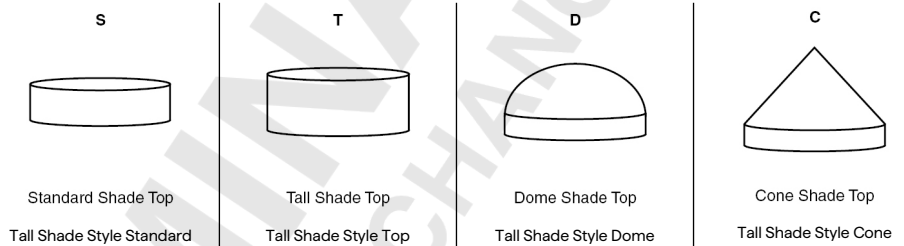

6

FINISH

Standard TGIC powder coat finishes and brass finish available





Row 3

12V T4 35W, 4W LED Path Light

ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be order separately

MT-45



Ground Stake

MT-2



Adjustable Ground Stake

MT-6



Stainless Steel Ground Spike

MT-7



Stainless Steel Ground Spike

MT-8



Stainless Steel Ground Spike

LAMPS

T4 Halogen or LED; GY-6.35 Bi Pin Porcelain
Maximum wattage: 35 Watt, 4 Watt LED

T4



BRILLIANCE

T4



ELI

T4



JQ

T4



EMERY ALLEN

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS