



## Row 3


12V T4 35W, 4W LED Path Light



10 YEAR  
WARRANTY  
ALUMINUM

25 YEAR  
WARRANTY  
COPPER

25 YEAR  
WARRANTY  
BRASS

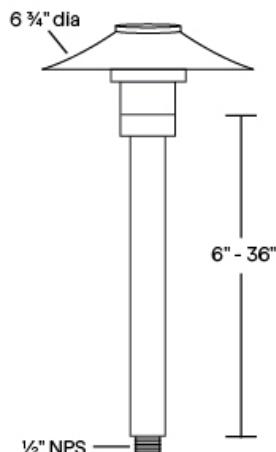

PL-1 Shown in Bronze Powder Coat Finish (BZ)

Dimensions: Aluminum: 6 3/4" dia. shade, 1" dia. stem

- Machined aluminum, available in seven standard TGIC powder coat finishes and clear anodized finish.
- Machined brass or copper, available in two finishes.
- Stainless steel hardware.
- 6 feet of 18/2 low voltage cable supplied.
- Frosted or clear tempered glass lens, glued in.
- High-temperature silicone O-ring seals are used to seal the cap against the body.
- Molded silicone wire pass-thru is attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 35 watt, 4 watt LED (order separately)
- Input Voltage: 12V (remote transformer required)
- Socket: GY 6.35 Bi-Pin Porcelain
- IP Rating: 66
- Specification-grade landscape lighting, wet-location luminaire for path or garden lighting applications.

1 PRODUCT	2 MATERIAL	3 LENS STYLE	4 SHADE TOP	5 STEM LENGTH	6 FINISH
PL-1	C				

Sample Part Number: PL-1-A-F-D-12-BZT

1 PRODUCT	2 MATERIAL	3 LENS STYLE	4 SHADE TOP	5 STEM LENGTH	6 FINISH
PL-1	C Machined Copper	F Frosted C Clear	S Standard T Tall D Dome C Cone	6 6" Stem Length 9 9" Stem Length 12 12" Stem Length 18 18" Stem Length 24 24" Stem Length 30 30" Stem Length 36 36" Stem Length	DB Dark Bronze NT Natural


10 year warranty for Aluminum | 25 year warranty for Brass & Copper! Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



## Row 3

### 12V T4 35W, 4W LED Path Light

#### 1 PRODUCT - DIMENSIONS



#### 2 MATERIAL




Machined Copper

#### 4 SHADE TOP

4 Shade Top Options

S



Standard Shade Top  
Tall Shade Style Standard

T




Tall Shade Top  
Tall Shade Style Top

D



Dome Shade Top  
Tall Shade Style Dome

C



Cone Shade Top  
Tall Shade Style Cone

#### 6 FINISH

Eight Standard TGIC powder coat finishes and Two brass finish available



Dark Bronze



Natural

#### ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be order separately

MT-45



Ground Stake

MT-2



Adjustable Ground Stake

MT-6



Stainless Steel Ground Spike

MT-7



Stainless Steel Ground Spike

MT-8



Stainless Steel Ground Spike



## Row 3

12V T4 35W, 4W LED Path Light

### LAMPS

T4 Halogen or LED: GY-6.35 Bi Pin Porcelain  
Maximum wattage: 35 Watt, 4 Watt LED

T4



EMERY ALLEN

### COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS

PRELIMINARY  
SUBJECT TO CHANGE