




SI-25

120V PAR20 Sign Light

10 YEAR
WARRANTY
ALUMINUM
MADE IN AMERICA
FROM DOMESTIC &
FOREIGN PARTS

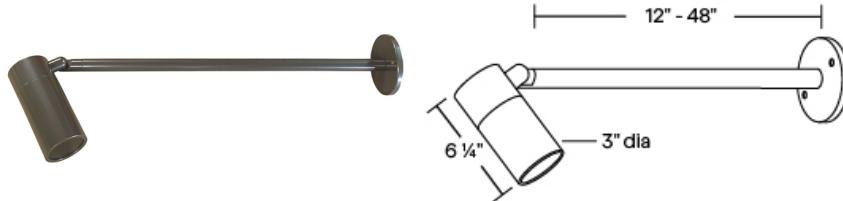

- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 10" 18ga. Teflon coated wire leads.
- Three mounting plate options.
- Specify MT-44 model for this product. See spec sheet for product details.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Tempered clear glass glued in.
- Available lengths: 12", 18", 24", 30", 36", 42" or 48"
- Maximum Wattage: 50 watt Halogen, 11 watt LED
- Input Voltage: 120V
- Knuckle: Tapered & Positive Locking
- Socket: Medium base ceramic
- IP Rating: 66
- Specification-grade wet-location luminaire for sign lighting applications.

SI-25 Shown in Bronze Powder Coat Finish (BZ)

Weight: 6.5 lbs
Dimensions: 3" dia. x 8 1/2" overall (fixture)

1 PRODUCT	2 MATERIAL	3 CAP	4 MOUNTING PLATE	5 STEM LENGTH	6 FINISH
SI-25	A				

Sample Part Number: SI-25-A-1-1-24-BK

1 PRODUCT	2 MATERIAL	3 CAP	4 MOUNTING PLATE	5 STEM LENGTH	6 FINISH
SI-25	A 6061 - T6 Aluminum	1 Flush 2 Recess 3 45 Degree	1 4/0 Round Mounting Plate 2 4/0 Square Mounting Plate 3 3/0 Round Mounting Plate 4 4/0 Box Mounting Plate	12 12" Stem Length 18 18" Stem Length 24 24" Stem Length 30 30" Stem Length 36 36" Stem Length 42 42" Stem Length 48 48" Stem Length	AC Aged Copper BG Beige BK Black BKT Black Texture BZ Bronze BZT Bronze Texture CA Clear Anodized SL Silver WH White


10 year warranty for Aluminum | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



SI-25

120V PAR20 Sign Light

1 PRODUCT - DIMENSIONS



2 MATERIAL



6061 - T6 Aluminum

6 FINISH

Standard TGIC powder coat finishes and Clear Anodized finish available



ACCESSORIES - LENS





SI-25

120V PAR20 Sign Light

ACCESSORIES - MOUNTING

4/0 or 3/0 junction covers



LAMPS



COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS