



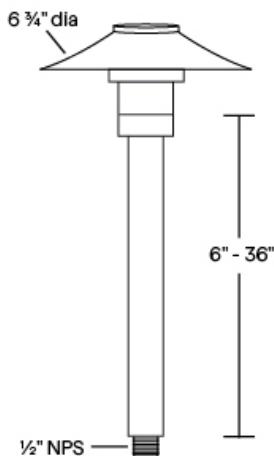

TEST – ALUMINUM (6-Block)

12V T4 35W, 4W LED Path Light

10 YEAR WARRANTY ALUMINUM 25 YEAR WARRANTY BRASS MADE IN AMERICA FROM DOMESTIC & FOREIGN PARTS

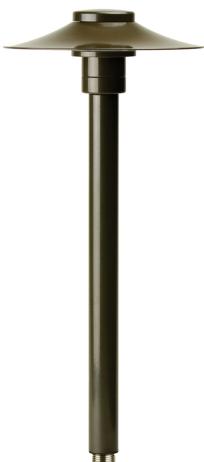

PL-1 Shown in Bronze Powder Coat Finish (BZ)

Weight: Aluminum: 1.6 lbs. Brass/Copper: 6.5

lbs. Dimensions: Aluminum: 6 3/4" dia. shade, 1" dia.

stem

- Machined aluminum, available in seven standard TGIC powder coat finishes and clear anodized finish.
- Machined brass or copper, available in two finishes.
- Remote transformer required.
- Stainless steel hardware.
- 6 feet of 18/2 low voltage cable supplied.
- Shade diameter of 6 3/4".
- Stems lengths of 6" - 36" available.
- Frosted or clear tempered glass lens, glued in.
- High-temperature silicone O-ring seals are used to seal the cap against the body.
- Molded silicone wire pass-thru is attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 35 watt, 4 watt LED (order separately)
- Input Voltage: 12V (remote transformer required)
- Socket: GY 6.35 Bi-Pin Porcelain
- IP Rating: 66
- Specification-grade landscape lighting, wet-location luminaire for path or garden lighting applications.

1 PRODUCT	2 MATERIAL	3 LENS STYLE	4 SHADE TOP	5 STEM LENGTH	6 FINISH
PL-1					

Sample Part Number: PL-1-A-F-D-12-BZT

1 PRODUCT	2 MATERIAL	3 LENS STYLE	4 SHADE TOP	5 STEM LENGTH	6 FINISH
PL-1	<p>A Machined Aluminum B Machined Brass C Machined Copper</p>	<p>F Frosted C Clear</p>	<p>S Standard T Tall D Dome C Cone</p>	<p>6 6" Stem Length 9 9" Stem Length 12 12" Stem Length 18 18" Stem Length 24 24" Stem Length 30 30" Stem Length 36 36" Stem Length</p>	<p>AC Aged Copper BG Beige BK Black BKT Black Texture BZ Bronze BZT Bronze Texture DB Dark Bronze NT Natural SL Silver WH White</p>


10 year warranty for Aluminum | 25 year warranty for Brass | Warranty Length | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




TEST – ALUMINUM (6-Block)

12V T4 35W, 4W LED Path Light

1 PRODUCT - DIMENSIONS




2 MATERIAL




4 SHADE TOP


4 Shade Top Options




Standard Shade Top



Tall Shade Top
Tall Shade Style Standard



Dome Shade Top
Tall Shade Style Dome



Cone Shade Top
Tall Shade Style Cone

6 FINISH

Standard TGIC powder coat finishes and brass finish available



Bronze Texture

Dark Bronze

Natural

Silver

White

ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be order separately



Ground Stake



Adjustable Ground Stake



Stainless Steel Ground Spike



Stainless Steel Ground Spike



Stainless Steel Ground Spike



TEST – ALUMINUM (6-Block)

12V T4 35W, 4W LED Path Light

LAMPS



COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS