




TEST - BOTH (6-Block)

12V T4 35W, 4W LED Path Light

10 YEAR
WARRANTY
ALUMINUM

25 YEAR
WARRANTY
BRASS

MADE IN AMERICA
FROM DOMESTIC &
FOREIGN PARTS

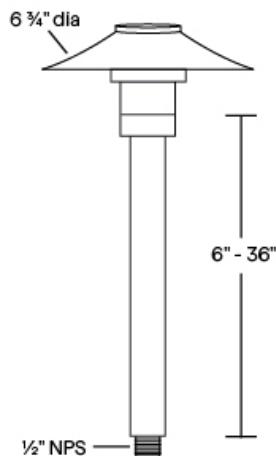

PL-1 Shown in Bronze Powder Coat Finish (BZ)

Weight: Aluminum: 1.6 lbs. Brass/Copper: 6.5 lbs. Dimensions: Aluminum: 6 3/4" dia. shade, 1" dia. stem

- Machined aluminum, available in seven standard TGIC powder coat finishes and clear anodized finish.
- Machined brass or copper, available in two finishes.
- Remote transformer required.
- Stainless steel hardware.
- 6 feet of 18/2 low voltage cable supplied.
- Shade diameter of 6 3/4".
- Stems lengths of 6" - 36" available.
- Frosted or clear tempered glass lens, glued in.
- High-temperature silicone O-ring seals are used to seal the cap against the body.
- Molded silicone wire pass-thru is attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 35 watt, 4 watt LED (order separately)
- Input Voltage: 12V (remote transformer required)
- Socket: GY 6.35 Bi-Pin Porcelain
- IP Rating: 66
- Specification-grade landscape lighting, wet-location luminaire for path or garden lighting applications.

1 PRODUCT	2 MATERIAL	3 LENS STYLE	4 SHADE TOP	5 STEM LENGTH	6 FINISH
PL-1					

Sample Part Number: PL-1-A-F-D-12-BZT

1 PRODUCT	2 MATERIAL	3 LENS STYLE	4 SHADE TOP
PL-1	A Machined Aluminum B Machined Brass C Machined Copper	F Frosted C Clear F Frosted C Clear	S Standard T Tall D Dome C Cone S Standard T Tall D Dome C Cone
5 STEM LENGTH	6 FINISH		
6 6" Stem Length 9 9" Stem Length 12 12" Stem Length 18 18" Stem Length 24 24" Stem Length 30 30" Stem Length 36 36" Stem Length	AC Aged Copper BG Beige BK Black BKT Black Texture BZ Bronze BZT Bronze Texture SL Silver WH White DB Dark Bronze NT Natural		
6 6" Stem Length 9 9" Stem Length 12 12" Stem Length 18 18" Stem Length 24 24" Stem Length 30 30" Stem Length 36 36" Stem Length			


10 year warranty for Aluminum | 25 year warranty for Brass | Warranty Length | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




TEST – BOTH (6-Block)

12V T4 35W, 4W LED Path Light

1 PRODUCT - DIMENSIONS




2 MATERIAL



4 SHADE TOP

4 Shade Top Options

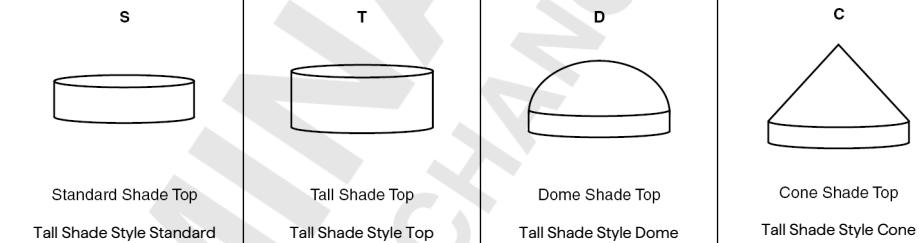

6 FINISH

Standard TGIC powder coat finishes and brass finish available





TEST – BOTH (6-Block)

12V T4 35W, 4W LED Path Light

ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be order separately



LAMPS



COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS