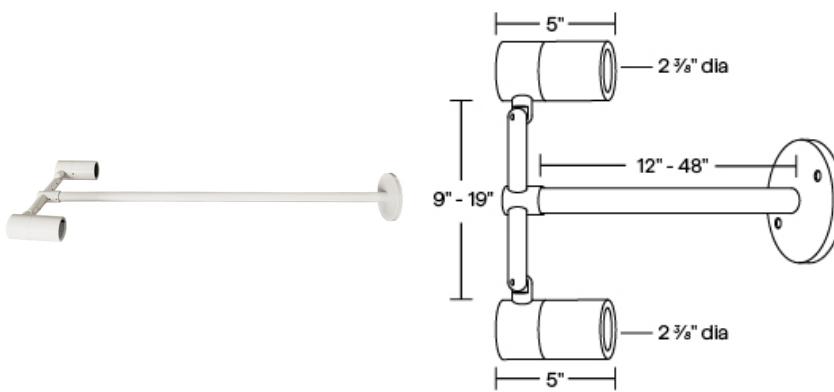


**SI-15**

12V MR16 Dual Sign Light

10 YEAR
WARRANTY
ALUMINUM

SI-15 Shown in White Powder Coat Finish (WT)

Weight: 6.5lbs
Overall Dimensions 2 3/8" dia. x 5" (fixture) 1" dia. stem

- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Remote transformer required.
- Specify MT-44 model for this product. See spec sheet for product details.
- Stainless steel hardware.
- Tempered clear glass glued in.
- Available stem lengths: 12", 18", 24", 30", 36", 42" or 48"
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Input Voltage: 12V
- Knuckle: Tapered & Positive Locking
- Socket: GY 6.35 bi-pin Porcelain
- IP Rating: 66
- Specification-grade wet-location luminaire for sign lighting applications

1 PRODUCT	2 MATERIAL	3 MOUNTING PLATE	4 Fixture Spacing	5 STEM LENGTH	6 FINISH
SI-15	A				

Sample Part Number: SI-15-A-1-9-24-BK


1 PRODUCT	2 MATERIAL	3 MOUNTING PLATE	4 Fixture Spacing
SI-15	A 6061 - T6 Aluminum	1 4/0 Round 2 4/0 Square 3 3/0 Round 4 4/0 Surface Mount Box w/ Cover	9 9" Fixture Spacing 11 11" Fixture Spacing 13 13" Fixture Spacing 19 19" Fixture Spacing
5 STEM LENGTH	6 FINISH		
12 12" Stem Length 18 18" Stem Length 24 24" Stem Length 30 30" Stem Length 36 36" Stem Length 42 42" Stem Length 48 48" Stem Length	AC Aged Copper BG Beige BK Black BKT Black Texture BZ Bronze BZT Bronze Texture CA Clear Anodized SL Silver WH White		

10 year warranty for Aluminum | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance

**SI-15**

12V MR16 Dual Sign Light

1 PRODUCT - DIMENSIONS



2 MATERIAL



6061 - T6 Aluminum

6 FINISH

Standard TGIC powder coat finishes and Clear Anodized finish available





SI-15

12V MR16 Dual Sign Light

ACCESSORIES - COLOR FILTERS

Holds up to three accessories Wire Filter Holder is included for each color filter to hold filter in place.

BL Blue Glass Filter To order separately use AY-2-MR-16-BL	LB Light Blue Glass Filter To order separately use AY-2-MR-16-LB	PK Pink Glass Filter To order separately use AY-2-MR-16-PK	AM Amber Glass Filter To order separately use AY-2-MR-16-AM	MV Mercury Vapor Glass Filter To order separately use AY-2-MR-16-MV	RD Red Glass Filter To order separately use AY-2-MR-16-RD	GR Green Glass Filter To order separately use AY-2-MR-16-GR	DA Dichroic Amber Glass Filter To order separately use AY-2-MR-16-DA

ACCESSORIES - LENS

Holds up to three accessories

SP Spread Lens To order separately use AY-1-MR16-1	LI Linear Lens To order separately use AY-1-MR16-2	SO Softening Lens To order separately use AY-1-MR16-3	LV Louver Lens To order separately use AY-1-MR16-4	WI Wire Holder To order separately use AY-1-MR16-5	FR Frosted Lens To order separately use AY-1-MR16-6

LAMPS

MR16 Halogen or LED; GY-6.35 Bi Pin Porcelain Maximum wattage: 50 Watt, 8 Watt LED (dual)

SORAA	ELI	BRILLIANCE	EMERY ALLEN

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS