




Test-Both

MR16 35W In-ground Light

10 YEAR
WARRANTY
ALUMINUM

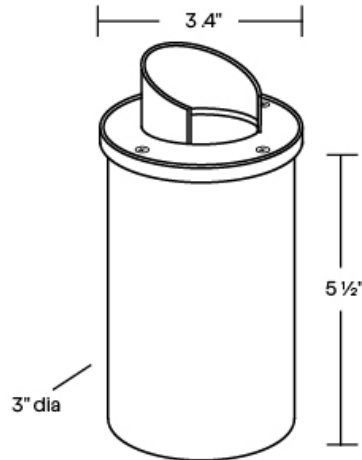

- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Remote transformer required.
- IP 67 rated.
- Two glare shield heights available.
- Two opening sizes available.
- Tempered glass lens.
- Pour collar option available.
- 6 feet of 16/2 low voltage cable supplied.
- Maximum Wattage: 35 watt, 8 watt LED
- Input Voltage: 12V (remote transformer required)
- Socket: GY-6.35 Bi Pin Porcelain
- IP Rating: 67
- Specification-grade direct burial landscape lighting, wet-location luminaire for uplighting applications.

IN-2 Shown in Bronze Powder Coat Finish (BZ) Weight: 2.5lbs Overall Dimensions: 3" dia. x 7" overall (5 1/2" tall housing)

1	2	3	4	5	6
PRODUCT	MATERIAL	CUTOFF HEIGHT	OPENING SIZE	POUR COLLAR	FINISH
IN-2					

Sample Part Number: IN-2-A-T-0-90-BK

1	PRODUCT	2	MATERIAL	3	CUTOFF HEIGHT	4	OPENING SIZE
	IN-2	A	6061 - T6 Aluminum	S	Short (1")	90	90 Degree Opening
				T	Tall (1 1/2")	180	180 Degree Opening (tall only)
		B	C36000 Brass	S	Short (1")	90	90 Degree Opening
				T	Tall (1 1/2")	180	180 Degree Opening (tall only)
5	POUR COLLAR	6	FINISH				
O	None (Standard)	AC	Aged Copper				
PC	Pour Collar (Optional)	BG	Beige				
		BK	Black				
		BKT	Black Texture				
		BZ	Bronze				
		BZT	Bronze Texture				
		SL	Silver				
		WH	White				
O	None (Standard)	DB	Dark Bronze				
PC	Pour Collar (Optional)	NT	Natural				

10 year warranty for Aluminum | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




Test-Both

MR16 35W In-ground Light

1

PRODUCT - DIMENSIONS



2

MATERIAL

	6061 - T6 Aluminum
	C36000 Brass

6

FINISH

Standard TGIC powder coat finishes and Clear Anodized finish available

FPO	Aged Copper		Bronze Texture
	Beige	FPO	Dark Bronze
	Black	FPO	Natural
	Black Texture		Silver
	Bronze		White











Test-Both

MR16 35W In-ground Light







ACCESSORIES - COLOR FILTERS

Holds up to three accessories Wire Filter Holder is included for each color filter to hold filter in place.

BL	LB	PK	AM	MV	RD	GR	DA
							
Blue Glass Filter	Light Blue Glass Filter	Pink Glass Filter	Amber Glass Filter	Mercury Vapor Glass Filter	Red Glass Filter	Green Glass Filter	Dichroic Amber Glass Filter
To order separately use AY-2-MR-16-BL	To order separately use AY-2-MR-16-LB	To order separately use AY-2-MR-16-PK	To order separately use AY-2-MR-16-AM	To order separately use AY-2-MR-16-MV	To order separately use AY-2-MR-16-RD	To order separately use AY-2-MR-16-GR	To order separately use AY-2-MR-16-DA

ACCESSORIES - LENS

Holds up to three accessories

SP	LI	SO	LV	WI	FR
					
Spread Lens	Linear Lens	Softening Lens	Louver Lens	Wire Holder	Frosted Lens
To order separately use AY-1-MR16-1	To order separately use AY-1-MR16-2	To order separately use AY-1-MR16-3	To order separately use AY-1-MR16-4	To order separately use AY-1-MR16-5	To order separately use AY-1-MR16-6

LAMPS

MR16	MR16	MR16
		
SORAA	ELI	BRILLIANCE

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS