




Test-Brass

MR16 35W In-ground Light

10 YEAR
WARRANTY
ALUMINUM

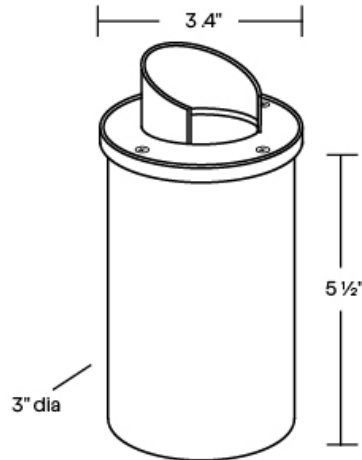

- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Remote transformer required.
- IP 67 rated.
- Two glare shield heights available.
- Two opening sizes available.
- Tempered glass lens.
- Pour collar option available.
- 6 feet of 16/2 low voltage cable supplied.
- Maximum Wattage: 35 watt, 8 watt LED
- Input Voltage: 12V (remote transformer required)
- Socket: GY-6.35 Bi Pin Porcelain
- IP Rating: 67
- Specification-grade direct burial landscape lighting, wet-location luminaire for uplighting applications.

IN-2 Shown in Bronze Powder Coat Finish (BZ) Weight: 2.5lbs Overall Dimensions: 3" dia. x 7" overall (5 1/2" tall housing)

1	2	3	4	5	6
PRODUCT	MATERIAL	CUTOFF HEIGHT	OPENING SIZE	POUR COLLAR	FINISH
IN-2	B				

Sample Part Number: IN-2-A-T-0-90-BK

1	PRODUCT	2	MATERIAL	3	CUTOFF HEIGHT	4	OPENING SIZE
	IN-2		B C36000 Brass		S Short (1") T Tall (1 1/2")		90 90 Degree Opening 180 180 Degree Opening (tall only)
5	POUR COLLAR	6	FINISH				
	0 None (Standard) PC Pour Collar (Optional)		DB Dark Bronze NT Natural				


10 year warranty for Aluminum | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



Test-Brass

MR16 35W In-ground Light

1 PRODUCT - DIMENSIONS



2 MATERIAL











6 FINISH

Standard TGIC powder coat finishes and Clear Anodized finish available



ACCESSORIES - COLOR FILTERS

Holds up to three accessories Wire Filter Holder is included for each color filter to hold filter in place.

BL	LB	PK	AM	MV	RD	GR	DA
							
Blue Glass Filter	Light Blue Glass Filter	Pink Glass Filter	Amber Glass Filter	Mercury Vapor Glass Filter	Red Glass Filter	Green Glass Filter	Dichroic Amber Glass Filter
To order separately use AY-2-MR-16-BL	To order separately use AY-2-MR-16-LB	To order separately use AY-2-MR-16-PK	To order separately use AY-2-MR-16-AM	To order separately use AY-2-MR-16-MV	To order separately use AY-2-MR-16-RD	To order separately use AY-2-MR-16-GR	To order separately use AY-2-MR-16-DA









Test-Brass

MR16 35W In-ground Light

ACCESSORIES - LENS

Holds up to three accessories

<p>SP</p>  <p>Spread Lens</p> <p>To order separately use AY-1-MR16-1</p>	<p>LI</p>  <p>Linear Lens</p> <p>To order separately use AY-1-MR16-2</p>	<p>SO</p>  <p>Softening Lens</p> <p>To order separately use AY-1-MR16-3</p>	<p>LV</p>  <p>Louver Lens</p> <p>To order separately use AY-1-MR16-4</p>	<p>WI</p>  <p>Wire Holder</p> <p>To order separately use AY-1-MR16-5</p>	<p>FR</p>  <p>Frosted Lens</p> <p>To order separately use AY-1-MR16-6</p>
---	---	--	---	---	--

LAMPS

<p>MR16</p>  <p>SORAA</p>	<p>MR16</p>  <p>ELI</p>	<p>MR16</p>  <p>BRILLIANCE</p>
--	--	---

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS