




## IN-5L

12VAC/DC MR16 9W LED In Ground Well Light

UL LISTED 5 YEAR WARRANTY

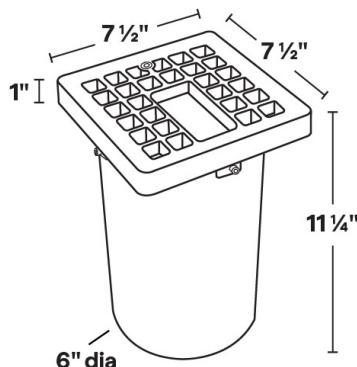

IN-5L Shown in Black Powder Coat Finish (BK)

Overall Dimensions 7 1/2 " square x 11 1/4" high

- Bronze frame and grate.
- Not compatible with electronic transformers.
- Hot-aiming option available.
- 18 degrees of aiming adjustment.
- Machined aluminum lamp holder.
- Tempered glass lens.
- Suitable for drive-over installations.
- 6 feet of 16/2 low voltage cable supplied.
- Input Voltage: 12VAC/DC (remote magnetic transformer required)
- Socket: GY 6.35 Bi-pin porcelain
- Wet Listed
- Specification-grade, wet-location direct burial landscape luminaire for uplighting applications.

1 PRODUCT	2 MATERIAL	3 AIMING	4 Fixture Recess	5 FINISH	6 WATTAGE	7 CCT	8 LENS
IN-5L	B				9.0		

Sample Part Number: IN-5L-B-H-1-BK-9.0-27-30

1 PRODUCT IN-5L	2 MATERIAL B Bronze	3 AIMING S Standard H Hot Aim	4 Fixture Recess 1 13/4" 2 3"(standard) 3 4 1/4" (hot-aim)	5 FINISH BG Beige BB Black Bronze BK Black BKT Black Texture BZ Bronze BZT Bronze Texture SL Silver WH White DB Dark Bronze NT Natural
6 WATTAGE 9.0 9.0W	7 CCT 27 2700K 30 3000K 40 4000K	8 LENS 15 15 Degree Lens 30 30 Degree Lens 45 45 Degree Lens 60 60 Degree Lens		


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



## IN-5L

### 12VAC/DC MR16 9W LED In Ground Well Light

#### 1 PRODUCT - DIMENSIONS



#### 2 MATERIAL



Bronze

#### 5 FINISH

Eight Standard TGIC powder coat finishes



#### ACCESSORIES - COLOR FILTERS

BL	LB	PK	AM	MV	RD	GR	DA
Blue Glass Filter To order separately use AY-2-MR16-BL	Light Blue Glass Filter To order separately use AY-2-MR16-LB	Pink Glass Filter To order separately use AY-2-MR16-PK	Amber Glass Filter To order separately use AY-2-MR16-AM	Mercury Vapor Glass Filter To order separately use AY-2-MR16-MV	Red Glass Filter To order separately use AY-2-MR16-RD	Green Glass Filter To order separately use AY-2-MR16-GR	Dichroic Amber Glass Filter To order separately use AY-2-MR16-DA




## IN-5L

12VAC/DC MR16 9W LED In Ground Well Light

### ACCESSORIES - LENS

Holds up to two accessories

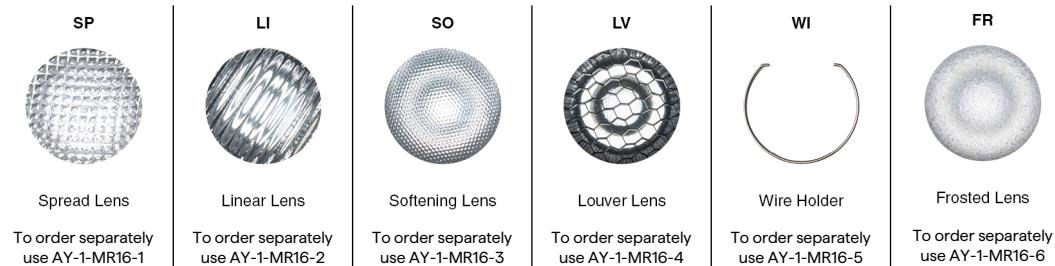

### COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS



## 9W LED MODULE

MR16 LED MODULE

3 YEAR  
WARRANTY



9W LED Module

- Equivalent to MR16 75W Halogen (equivalent CBCP)
- 2700K, 3000K, or 4000K
- 10.8-13.2V AC/DC
- 12W startup draw
- Interchangeable lens: 15°, 30°, 45°, 60°
- Compatible with low-voltage magnetic transformers
- Field replaceable

### LED MODULE SPECIFICATIONS

WATTAGE	LENS	2700K	3000K	4000K
9W	15°, 30°, 45°, 60°	810 Lumens	835 Lumens	855 Lumens

### LED LENS



15° Lens



30° Lens



45° Lens



60° Lens