




## IN-5L

12VAC/DC MR16 9W LED In Ground Well Light

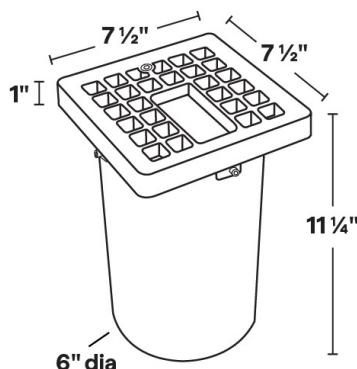

IN-5L Shown in Bronze Texture Powder Coat Finish (BZT)

Dimensions: 7 1/2 " square x 11 1/4"

- Bronze frame and grate.
- Not compatible with electronic transformers.
- Hot-aiming option available.
- 18 degrees of aiming adjustment.
- Machined aluminum lamp holder.
- Tempered glass lens.
- 6 feet of 16/2 low voltage cable supplied.
- Input Voltage: 12VAC/DC (remote magnetic transformer required)
- Socket: GU5.3 Bi-pin porcelain
- Wet Listed
- Specification-grade, wet-location direct burial landscape luminaire for uplighting applications.

1 PRODUCT	2 MATERIAL	3 AIMING	4 Fixture Regress	5 FINISH	6 WATTAGE	7 CCT	8 LENS
IN-5L	B				9.0		

Sample Part Number: IN-5L-B-H-1-BK-9.0-27-30

1 PRODUCT IN-5L	2 MATERIAL B Bronze	3 AIMING S Standard H Hot Aim	4 Fixture Regress 1 13/4" 2 3" (standard) 3 4 1/4" (hot-aim)	5 FINISH BG Beige BB Black Bronze BK Black BKT Black Texture BZ Bronze BZT Bronze Texture SL Silver WH White DB Dark Bronze NT Natural DB finish has longer lead time
6 WATTAGE 9.0 9.0W	7 CCT 27 2700K 30 3000K 40 4000K	8 LENS 15 15 Degree Lens 30 30 Degree Lens 45 45 Degree Lens 60 60 Degree Lens		


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



## IN-5L

12VAC/DC MR16 9W LED In Ground Well Light

### 1 PRODUCT - DIMENSIONS




### 2 MATERIAL



Bronze

### 5 FINISH

Eight Standard TGIC Free powder coat finishes

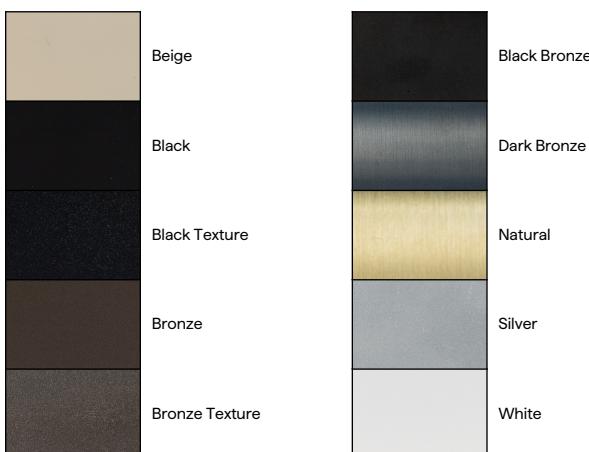

### ACCESSORIES - COLOR FILTERS

BL	LB	PK	AM	MV	RD	GR	DA
Blue Glass Filter To order separately use AY-2-MR16-BL	Light Blue Glass Filter To order separately use AY-2-MR16-LB	Pink Glass Filter To order separately use AY-2-MR16-PK	Amber Glass Filter To order separately use AY-2-MR16-AM	Mercury Vapor Glass Filter To order separately use AY-2-MR16-MV	Red Glass Filter To order separately use AY-2-MR16-RD	Green Glass Filter To order separately use AY-2-MR16-GR	Dichroic Amber Glass Filter To order separately use AY-2-MR16-DA




## IN-5L

12VAC/DC MR16 9W LED In Ground Well Light

### ACCESSORIES - LENS

Holds up to two accessories

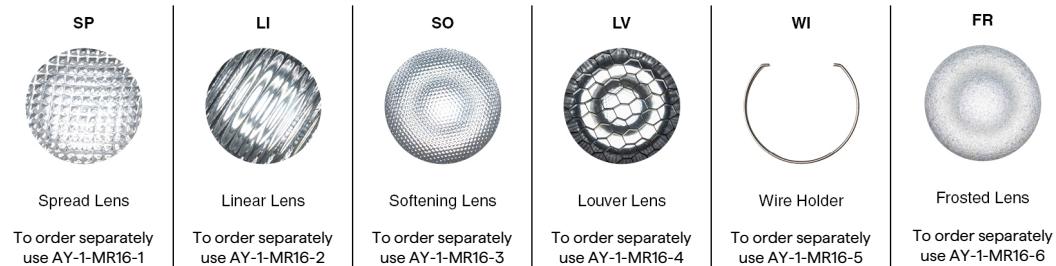

### COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS



## 9W LED MODULE

MR16 LED MODULE

3 YEAR  
WARRANTY



9W LED Module

- Equivalent to MR16 75W Halogen (equivalent CBCP)
- 2700K, 3000K, or 4000K
- 10.8-13.2V AC/DC
- 12W startup draw
- Interchangeable lens: 15°, 30°, 45°, 60°
- Compatible with low-voltage magnetic transformers
- Field replaceable

### LED MODULE SPECIFICATIONS

WATTAGE	LENS	2700K	3000K	4000K
9W	15°, 30°, 45°, 60°	810 Lumens	835 Lumens	855 Lumens

### LED LENS



15° Lens



30° Lens



45° Lens



60° Lens