




OPTI-MITERED

Field Assembled Extrusion - Surface

SEE THIS EXTRUSION AS A FACTORY BUILT FIXTURE ▶



- Mid-low profile LED aluminum extrusion
- Mitered edges allow for different configuration options
- Ideal for surface-mounted installations
- Integrated metal endcaps combined with an extruded aluminum housing give this fixture a polished modern look

1 PRODUCT	2 FINISH	3 MOUNTING	4 LENS	5 WIRE INPUT/OUTPUT	6 LEFT END ANGLE	7 RIGHT END ANGLE	8 EXTRUSION LENGTH (IN)
OPTIM				NI			

Sample Part Number: **OPTIM-ST-SST-CL-NI-LI45-RI45-48"**

1 PRODUCT	2 FINISH	3 MOUNTING	4 LENS
OPTIM	<p>ST Satin</p> <p>BK Black</p> <p>WH White</p> <p>CU Custom Color</p>	<p>SST Stainless Steel</p> <p>MG Magnet</p> <p>Refer to following pages for mounting clip option details and provided quantities.</p>	<p>DF Diffused</p> <p>PR Polar</p> <p>FR Frosted</p> <p>CL Clear</p> <p>FT Forward Throw</p> <p>N/A For use with SHIELD</p> <p>For representation of LED visibility, see Diode Visibility section on following pages.</p>
5 WIRE INPUT/OUTPUT	6 LEFT END ANGLE	7 RIGHT END ANGLE	8 EXTRUSION LENGTH (IN)
NI Not Installed	<p>LI45 Inner 45°</p> <p>LO45 Outer 45°</p> <p>LFT Flat (no angle)</p> <p>See following pages for mitered angle configuration options</p>	<p>LI45 Inner 45°</p> <p>LO45 Outer 45°</p> <p>LFT Flat (no angle)</p> <p>See following pages for mitered angle configuration options</p>	<p>1" increments from 1" - 98.43"</p> <p>Tolerance +0.0"/-0.5"</p>

COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE INDIVIDUALLY ADDRESSABLE (SW-IA)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY	✓ W/FT: 1.5, 3.0, 4.0, 5.0		✓ W/FT: 10, 20, 40, 6.0	✓ W/FT: 1.5, 3.0, 6.0, 9.0	✓ W/FT: 3.0, 6.0		✓ W/FT: 1.5, 2.5, 4.0	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	
DMP												
ENC												
WET												

Field modifications must comply with QTL's installation methods otherwise warranty is null & void | Metal end caps




OPTI-MITERED

Field Assembled Extrusion - Surface

SEE THIS EXTRUSION AS A FACTORY BUILT FIXTURE ▶


1 PRODUCT - DIMENSIONS

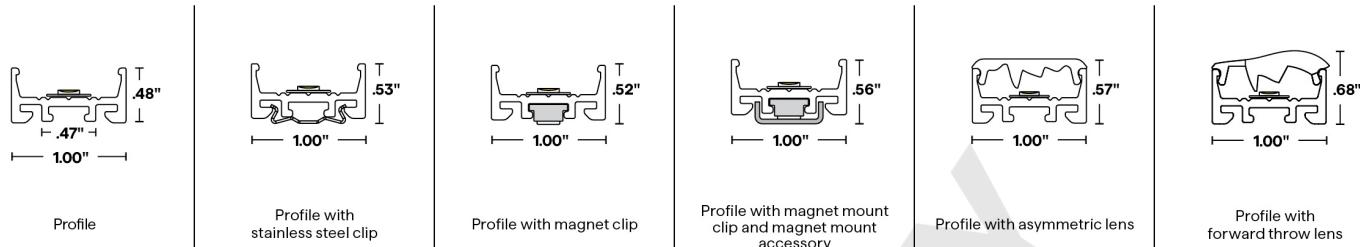


END CAPS

One pair of end caps is provided with each length of extrusion ordered.

Flat end caps



Feed



No feed

To order separately,
use OPTI-EC


To order separately,
use OPTI-EC

2 FINISH



Custom color available

3 MOUNTING




SST
2 clips provided for 4' or less; 4 clips provided for greater than 4'
To order separately use SST-01

Each clip comes with a #4 x 5/8" Flat Head SS



MG
One MG provided per foot.
To order separately use MG-02



MMA-02
Magnet Mount Accessory for MG-02
Sold separately, to order use MMA-02
Each bracket comes with 2 #6 x 5/8 Flat Head SS
Required when mounting to a non-magnetic surface



OPTI-MITERED

Field Assembled Extrusion - Surface

SEE THIS EXTRUSION AS A FACTORY BUILT FIXTURE ▶

4 DIODE VISIBILITY



Diffused
Polar
Frosted
Clear

COMPATIBLE ACCESSORIES

HINGE - HMB-M	HINGE - HMB-L	HINGE - HMB-XL	Q-PIVOT	Q-ANGLE	QUOVA-STANDARD	SHIELD B - Small	SHIELD B - Medium	SHIELD B - Large
1.41" 1.41" Adjustable mounting bracket - Medium	1.46" 1.29" Adjustable mounting bracket - Large	1.46" 4" Adjustable mounting bracket - XLarge	.75" 1.03" Small mounting accessory	2.23" 1.38" Adjustable mounting accessory	QUOVA Knife Edge	For use within extrusions	For use within extrusions	For use within extrusions

6 / 7 LEFT/RIGHT END ANGLE CONFIGURATION OPTIONS

