




TRE3

Field Assembled Extrusion - Surface

SEE THIS EXTRUSION AS A FACTORY BUILT FIXTURE ▶



- An impressive solution for grid ceiling and surface mount applications because of its unique three-sided lens
- TRE3 has two engineered mounting clips: a surface mount hidden stainless steel clip and a ceiling mount plastic T-Bar clip
- Available in lengths up to 98.43"

1 PRODUCT	2 FINISH	3 MOUNTING	4 LENS	5 WIRE INPUT/OUTPUT	6 EXTRUSION LENGTH (IN)
TRE3			DF	NI	

Sample Part Number: **TRE3-ST-HSS-DF-NI-48"**

1 PRODUCT	2 FINISH	3 MOUNTING
TRE3	ST CU Satin Custom Color	HSS TBC-01 9/16" Flat or Tegular TB-Grid TBC-02 15/16" Flat or Tegular TB-Grid Refer to following pages for mounting clip option details and provided quantities.
4 LENS	5 WIRE INPUT/OUTPUT	6 EXTRUSION LENGTH (IN)
DF Diffused For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages.	NI Not Installed	1" increments from 1" - 98.43" Tolerance +0.0"/-0.5"

COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	STATIC WHITE DOUBLE ROW (SW-DR)	STATIC WHITE HIGH EFFICACY DOUBLE ROW (SW-HE-DR)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY		✓ W/FT: 10.2, 4.0, 6.0	✓ W/FT: 1.5, 3.0, 6.0	✓ W/FT: 3.0, 6.0					✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
DMP			✓ W/FT: 1.5, 3.0, 6.0						✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
ENC													
WET		✓ W/FT: 1.0, 2.0, 4.0								✓ W/FT: 5.0			

Field modifications must comply with QTL's installation methods otherwise warranty is null & void | Ceiling grid mount | Three-sided lens | Painted end caps match the extrusion finish and have a white painted interior. Satin end caps utilize a metallic paint.




TRE3

Field Assembled Extrusion - Surface

SEE THIS EXTRUSION AS A FACTORY BUILT FIXTURE ▶


1 PRODUCT - DIMENSIONS

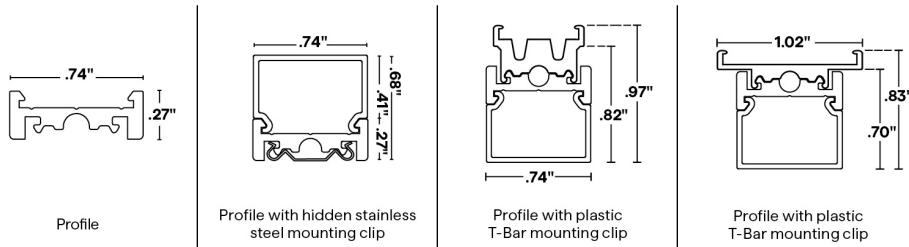

END CAPS

One pair of end caps is provided with each length of extrusion ordered.

Flat end caps

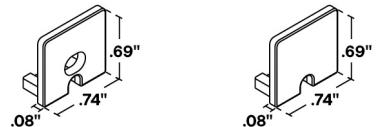

Feed

No Feed

To order separately, use TRE3-
EC To order separately, use TRE3-
EC


2 FINISH



Satin

3 MOUNTING

HSS




Hidden Stainless Steel Clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use SST-02

Each clip comes with a #4 x 5/8" Flat Head SS

TBC-01




Plastic T-Bar Clip

Use on 9/16" Flat or Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length

To order separately use TBC-01

TBC-02



Plastic T-Bar Clip

Use on 15/16" Flat or Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length

To order separately use TBC-02

**TRE3**

Field Assembled Extrusion - Surface

SEE THIS EXTRUSION AS A FACTORY BUILT FIXTURE ▶

4 DIODE VISIBILITY




DF - Diffused lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see factory built fixture photometric data.

DF



Diffused 136°

COMPATIBLE ACCESSORIES

HINGE - HMB-M



.71"

HINGE - HMB-L



1.46"

HINGE - HMB-XL



1.29"

1.46"

Q-PIVOT

4"
1.46".75"
1.03"Small mounting
accessory

Q-ANGLE

2.23"
1.38"Adjustable mounting
accessory

SHIELD B - Small

For use within
extrusions

SHIELD B - Medium

For use within
extrusionsAdjustable mounting
bracket - MediumAdjustable mounting
bracket - LargeAdjustable mounting
bracket - XLarge