



OPTI


Field Assembled Extrusion - Surface & Recessed



Declare.



SEE THIS EXTRUSION AS A FACTORY BUILT FIXTURE ▶




**OPTI**

Field Assembled Extrusion - Surface & Recessed

SEE THIS EXTRUSION AS A FACTORY BUILT FIXTURE ▶

COMPATIBLE LED STRIPS - OPTICAL LENS ONLY (40°, 60°, 70°, 90°, 110°, 155°, 180°, ASYM, FT)

	STATIC WHITE (SW)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	STATIC WHITE DOUBLE ROW (SW-DR)	STATIC WHITE HIGH EFFICACY DOUBLE ROW (SW-HE-DR)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY	✓ W/FT: 1.5, 3.0, 4.0, 5.0	✓ W/FT: 1.0, 2.0, 4.0, 6.0	✓ W/FT: 1.5, 3.0, 6.0, 9.0	✓ W/FT: 3.0, 6.0				✓ W/FT: 1.5, 2.5, 4.0	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	
DMP	✓ W/FT: 1.5, 3.0, 4.0, 5.0		✓ W/FT: 1.5, 3.0, 6.0					✓ W/FT: 1.5, 2.5, 4.0	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	
ENC													
WET													

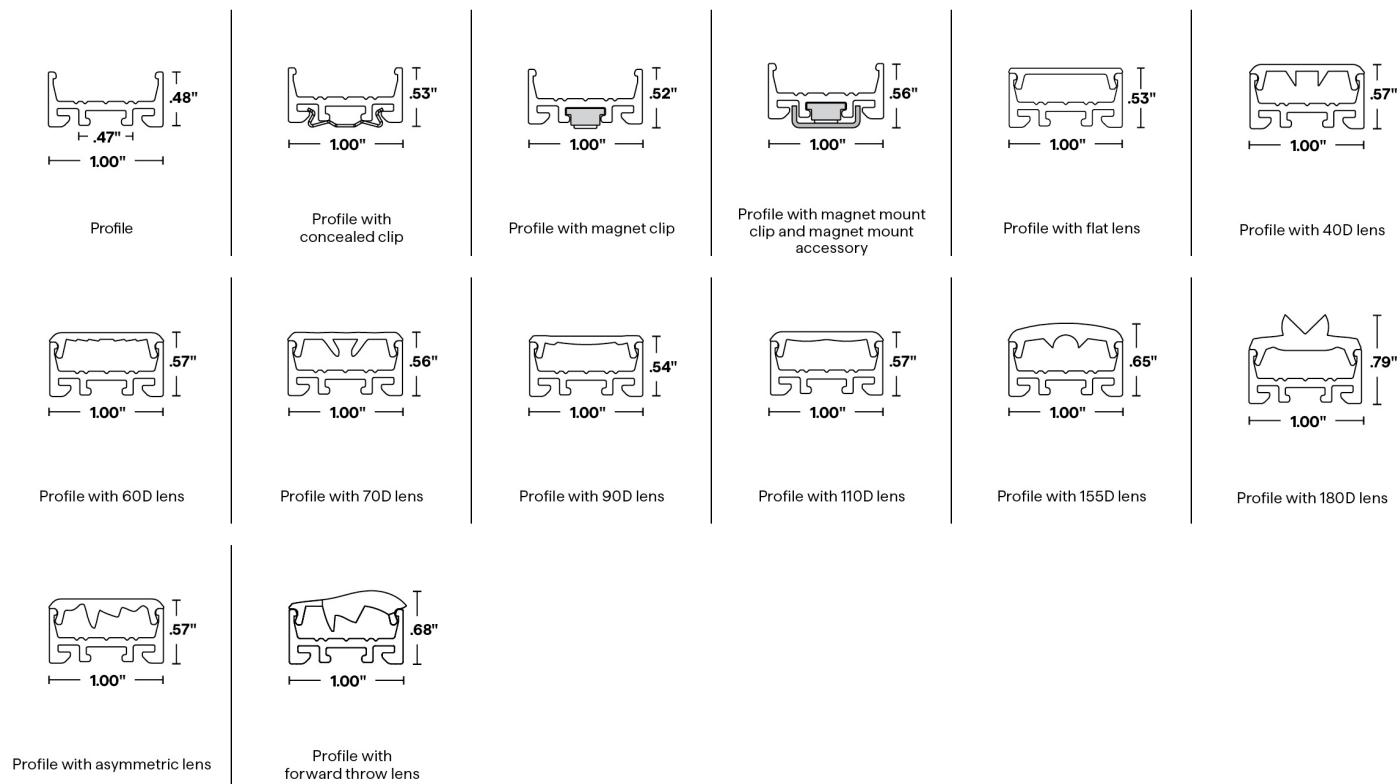1 PRODUCT - DIMENSIONS

**OPTI**


Field Assembled Extrusion - Surface & Recessed

SEE THIS EXTRUSION AS A FACTORY BUILT FIXTURE ▶

END CAPS

One pair of end caps is provided with each length of extrusion ordered.


Flat end caps



Feed

To order separately,
use OPTI-A-EC

For use with flat lenses only




No feed


To order separately,
use OPTI-A-EC

For use with flat lenses only

Optical end caps



Feed

To order separately,
use OPTI-EC

No feed

To order separately,
use OPTI-EC

2 FINISH



Satin

Black

White

Custom finishes require a
longer lead time, consult
factory

3 MOUNTING

CC
(CC-01)

Concealed Clip

2 pieces of hardware provided for 4' or less; 4
pieces of hardware provided for
greater than 4'

To order separately use CC-01(sold in pairs)

Each clip comes with a #4 x 5/8" Flat Head
screw.

MG




Magnet Clip

One MG provided per foot.

To order separately use MG-02

MMA-02



Magnet Mount
Accessory for MG-02

Sold separately, to order use MMA-02
Each bracket comes with 2 #6 x 5/8
Flat Head SS

Required when mounting to a non-magnetic
surface

**OPTI**

Field Assembled Extrusion - Surface & Recessed

SEE THIS EXTRUSION AS A FACTORY BUILT FIXTURE ▶

4 DIODE VISIBILITY

DF - Flat Diffused lens

PR - Flat Polar lens

FR - Flat Frosted lens

Optical 40°

Optical 60°

Optical 70°

Optical 90°

Optical 110°

Optical 155°


Optical 180°

Asymmetric

Forward Throw

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see factory built fixture photometric data.

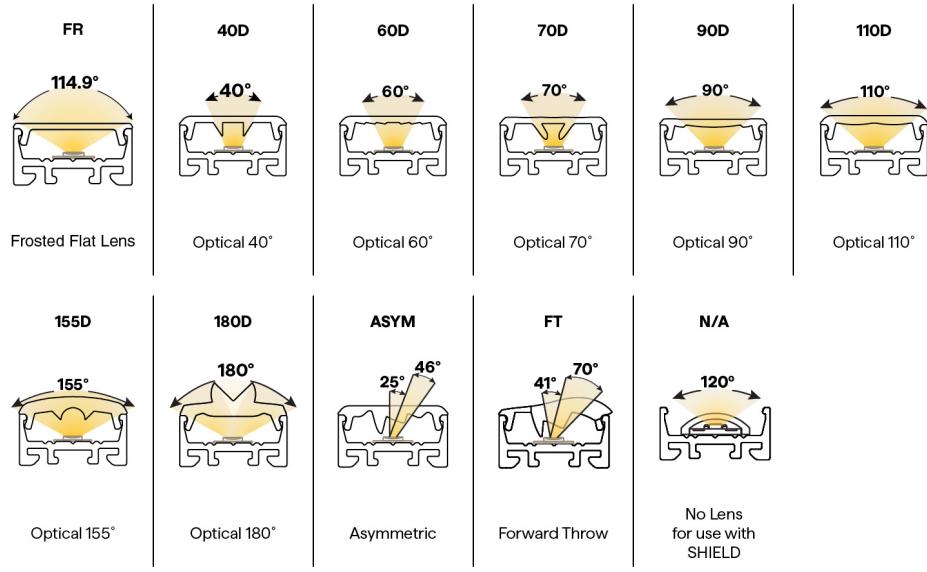**COMPATIBLE ACCESSORIES**

HINGE - HMB-M 1.41" .71"	HINGE - HMB-L 1.46" 1.29"	HINGE - HMB-XL 1.46" 4"	Q-PIVOT .75" 1.03"	Q-ANGLE 1.38" 2.23"	QUOVA-STANDARD QUOVA Knife Edge	SHIELD B - Small For use within extrusions	SHIELD B - Medium For use within extrusions	SHIELD B - Large For use within extrusions	MMA-02 Magnet Mount Accessory of MG-02 .58"
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory	QUOVA Knife Edge				