



POSH

Field Assembled Extrusion - Closet Rod

SEE THIS EXTRUSION AS A FACTORY BUILT FIXTURE ▶



FPO



1.18" dia

- Flexible sleeve consisting of a carrier and silicone cover to protect LED strips
- Available with frosted or diffused lens
- Comes in small, medium or large sizes to accommodate for different LED strip widths
- SHLD-A is a standalone version to use in place of extrusion and lens
- SHLD-B is used within aluminum extrusions to add additional diffusion, light loss factor dependent on diffusion levels

1 PRODUCT	2 FINISH	3 MOUNTING	4 LENS	5 WIRE INPUT/OUTPUT	6 EXTRUSION LENGTH (IN)
POSH			DF	NI	

Sample Part Number: POSH-ST-SB-DF-NI-48"

1 PRODUCT	2 FINISH	3 MOUNTING
POSH	ST Satin BK Black OBZ Oil Rubbed Bronze CU Custom Color	SB Support Bracket WM Wall Mount
	Custom finishes require a longer lead time, consult factory	Refer to following pages for mounting clip option details and provided quantities.
4 LENS	5 WIRE INPUT/OUTPUT	6 EXTRUSION LENGTH (IN)
DF Diffused For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages.	NI Not Installed	1" increments from 1" - 98.43" Tolerance +0.0"/-0.5"

COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	STATIC WHITE DOUBLE ROW (SW-DR)	STATIC WHITE HIGH EFFICACY DOUBLE ROW (SW-HE-DR)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY W/FT: 15, 30, 40, 50	✓		✓ W/FT: 15, 30, 60										
DMP													
ENC													
WET													

Field modifications must comply with QTL's installation methods otherwise warranty is null & void | Surface mount | Painted end caps match the extrusion finish and have a white painted interior. Satin end caps utilize a metallic paint


**POSH**

Field Assembled Extrusion - Closet Rod

SEE THIS EXTRUSION AS A FACTORY BUILT FIXTURE ▶

1 PRODUCT - DIMENSIONS

Profile




Profile with support

END CAPS

One pair of end caps is provided with each length of extrusion ordered.

Flat end caps

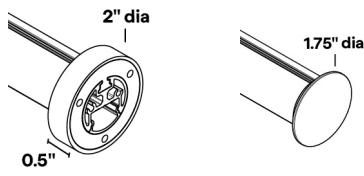

Feed



No feed

WALL TO WALL

Endplate and Screw on canopy

FLOAT

Endcap has no hole as it should be an S2/rear exit feed

2 FINISH**3 MOUNTING**

Closet Rod Support Bracket

FLOAT & WALL TO WALL

SB to be used spaced evenly up to 2'. If spacing is larger than 2', add another support bracket. 2 support brackets provided for 6' or less; 3 support brackets provided greater than 6' spaced evenly

To order more support brackets use POSH-SB-XX

WM

Mounting Plate and Cover for Wall to Wall

WALL TO WALL

No support brackets provided for 4' or less. 2 supports provided for 4'-6'. SB's to be used spaced evenly up to 2'. 3 supports provided for 6'-8' SB to be used spaced evenly up to 2'.

To order more canopies use POSH-WM-COVER-XX

4 DIODE VISIBILITY

DF - Diffused lens

PHOTOMETRIC PERFORMANCE**FPO**