





# TALO

## Field Assembled Extrusion - Surface

SEE THIS EXTRUSION AS A FACTORY BUILT FIXTURE ▶

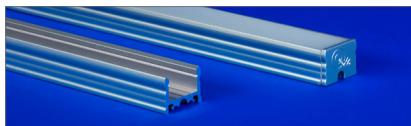

- TALO's modern design is complemented by its sleek flat lens and end caps that promote full luminosity
- Utilizes a hidden stainless steel mounting clip
- Compatible with a plastic T-Bar clip for grid ceiling applications
- Can be used with LEDs up to 6.0 W/ft

1 PRODUCT	2 FINISH	3 MOUNTING	4 LENS	5 WIRE INPUT/OUTPUT	6 EXTRUSION LENGTH (IN)
TALO				NI	

Sample Part Number: **TALO-ST-HSS-DF-NI-48"**

<b>1</b> PRODUCT	<b>2</b> FINISH	<b>3</b> MOUNTING	<b>4</b> LENS	<b>5</b> WIRE INPUT/OUTPUT	<b>6</b> EXTRUSION LENGTH (IN)
TALO	<b>ST</b> Satin <b>BK</b> Black <b>CU</b> Custom Color  Custom finishes require a longer lead time, consult factory	<b>HSS</b> Hidden Stainless Steel Clip <b>TBC-01</b> 9/16" Flat or Tegular TB-Grid <b>TBC-02</b> 15/16" Flat or Tegular TB-Grid  Refer to following pages for mounting clip option details and provided quantities.	<b>DF</b> Diffused <b>PR</b> Polar <b>FR</b> Frosted <b>CL</b> Clear	<b>NI</b> Not Installed	1" increments from 1" - 98.43" Tolerance +0.0"/-0.5"

## COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	STATIC WHITE DOUBLE ROW (SW-DR)	STATIC WHITE HIGH EFFICACY DOUBLE ROW (SW-HE-DR)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
<b>DRY</b>	✓ W/FT: 1.5, 3.0, 4.0, 5.0	✓ W/FT: 10, 2.0, 4.0, 6.0	✓ W/FT: 1.5, 3.0, 6.0	✓ W/FT: 3.0, 6.0				✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0 NO CLEAR LENS
<b>DMP</b>	✓ W/FT: 1.5, 3.0, 4.0, 5.0		✓ W/FT: 1.5, 3.0, 6.0					✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0 NO CLEAR LENS
<b>ENC</b>	✓ W/FT: 1.5, 3.0, 4.0, 5.0		✓ W/FT: 1.5, 3.0, 6.0					✓ W/FT: 1.5, 2.5		✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
<b>WET</b>	✓ W/FT: 1.5, 3.0, 4.0, 5.0	✓ W/FT: 10, 2.0, 4.0		✓ W/FT: 3.0, 6.0	✓ W/FT: 3.0			✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0		✓ W/FT: 4.0 NO CLEAR LENS

Field modifications must comply with QTL's installation methods otherwise warranty is null & void | Surface mount | Painted end caps match the extrusion finish and have a white painted interior. Satin end caps utilize a metallic paint.




**TALO**

Field Assembled Extrusion - Surface

SEE THIS EXTRUSION AS A FACTORY BUILT FIXTURE ▶


## 1 PRODUCT - DIMENSIONS

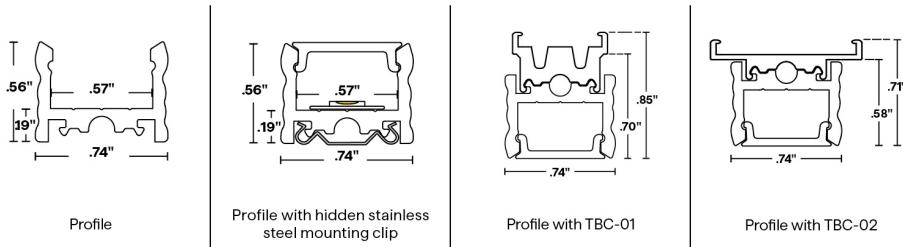

## END CAPS

One pair of end caps is provided with each length of extrusion ordered.

Flat end caps

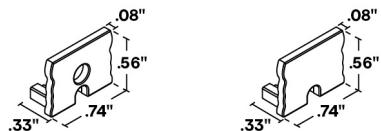

Feed

No feed

To order separately, use  
TALO-ECTo order separately, use  
TALO-EC

## 2 FINISH



Satin

Black

Custom finishes require a longer lead time, consult factory

## 3 MOUNTING

	HSS	TBC-01	TBC-02
	 Hidden Stainless Steel Clip 2 clips provided for 4' or less; 4 clips provided for greater than 4' To order separately use SST-02 Each clip comes with a #4 x 5/8" Flat Head SS	 Plastic T-Bar Clip Use on 9/16" Flat or Tegular Drop Ceiling 2 clips provided for first 12"; 1 clip provided for each additional 12" or less length To order separately use TBC-01	 Plastic T-Bar Clip Use on 15/16" Flat or Tegular Drop Ceiling 2 clips provided for first 12"; 1 clip provided for each additional 12" or less length To order separately use TBC-02



# TALO

## Field Assembled Extrusion - Surface

SEE THIS EXTRUSION AS A FACTORY BUILT FIXTURE ▶

### 4 DIODE VISIBILITY



DF - Diffused lens

PR - Polar lens

FR - Frosted lens

CL - Clear lens

### PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see factory built fixture photometric data.

CL



Clear 80°

### COMPATIBLE ACCESSORIES

HINGE - HMB-M



.71"

1.41"

Adjustable mounting bracket - Medium

HINGE - HMB-L



1.46"

1.29"

Adjustable mounting bracket - Large

HINGE - HMB-XL




1.46"

4"

Adjustable mounting bracket - XLarge

Q-PIVOT



.75"  
1.03"

Small mounting accessory

Q-ANGLE



2.23"  
1.38"

Adjustable mounting accessory

VHB



Double sided mounting tape

SHIELD B - Small



For use within extrusions

SHIELD B - Medium



For use within extrusions