




LATO

Field Assembled Extrusion - Recessed

SEE THIS EXTRUSION AS A FACTORY BUILT FIXTURE ▶



Declare.



- Shallow flanged LED extrusion designed for surface or recessed mounting applications
- Combine with White Optics to increase light output between 5-14%

1 PRODUCT	2 FINISH	3 MOUNTING	4 LENS	5 WIRE INPUT/OUTPUT	6 EXTRUSION LENGTH (IN)
		SST		NI	

Sample Part Number: **LATO-BZ-SST-PR-NI-48"**

1 PRODUCT	2 FINISH	3 MOUNTING	4 LENS	5 WIRE INPUT/OUTPUT	6 EXTRUSION LENGTH (IN)
LATO LATO-WO WO - WhiteOptics (Internal coating, greater lumen output)	ST Satin BK Black BZ Bronze CU Custom Color	SST Stainless Steel Refer to following pages for mounting clip option details and provided quantities.	DF Diffused PR Polar FR Frosted CL Clear	NI Not Installed	1" increments from 1" - 98.43" Tolerance +0.0"/-0.5"

Custom finishes require a longer lead time, consult factory

For representation of LED visibility, see Diode Visibility section on following pages.
 For beam angles, see Photometric Performance section on following pages.

COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	STATIC WHITE DOUBLE ROW (SW-DR)	STATIC WHITE HIGH EFFICACY DOUBLE ROW (SW-HE-DR)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY	✓ W/FT: 15, 3.0, 4.0, 5.0	✓ W/FT: 10, 2.0, 4.0, 6.0	✓ W/FT: 1.5, 3.0, 6.0	✓ W/FT: 3.0, 6.0				✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0		✓ W/FT: 4.0 NO CLEAR LENS
DMP	✓ W/FT: 15, 3.0, 4.0, 5.0		✓ W/FT: 1.5, 3.0, 6.0					✓ W/FT: 1.5, 2.5		✓ W/FT: 5.0	✓ W/FT: 6.0		✓ W/FT: 4.0 NO CLEAR LENS
ENC	✓ W/FT: 15, 3.0, 4.0, 5.0		✓ W/FT: 1.5, 3.0, 6.0					✓ W/FT: 1.5, 2.5		✓ W/FT: 5.0	✓ W/FT: 6.0		✓ W/FT: 4.0
WET	✓ W/FT: 15, 3.0, 4.0, 5.0	✓ W/FT: 10, 2.0, 4.0								✓ W/FT: 5.0			

Field modifications must comply with QTL's installation methods otherwise warranty is null & void | Recess mount with adhesive only | Painted end caps with white interior | Patent # D799,065

S




LATO

Field Assembled Extrusion - Recessed

SEE THIS EXTRUSION AS A FACTORY BUILT FIXTURE ▶

1 PRODUCT - DIMENSIONS

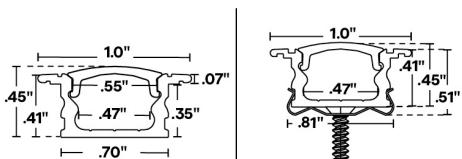


Profile with flat lens

Profile with stainless steel mounting clip

END CAPS

One pair of end caps is provided with each length of extrusion ordered.

Flat end caps



No feed

To order separately, use
LATO-EC

WHITEOPTICS® PHOTOMETRICS

[Calculated L70(6k) - 70000 hours] Tested with SW24/5.0-DRY-30


	LATO LM/FT		LATO-WO LM/FT		LATO-WO Lumen Increase	
	Satin	Black/Bronze	Satin	Black/Bronze	Satin	Black/Bronze
Clear	374	328	393	352	5%	7%
Frosted	338	298	356	324	5%	9%
Polar	331	276	346	307	5%	11%
Diffused	287	235	305	268	6%	14%

2 FINISH



Custom finishes require
a longer lead time,
consult factory

3 MOUNTING



Stainless Steel Clip

2 clips provided for 4' or less; 4 clips provided
for greater than 4'

To order separately use SST-01

Each clip comes with a #4 x 5/8" Flat Head SS

4 DIODE VISIBILITY



DF - Diffused lens

PR - Polar lens

FR - Frosted lens

CL - Clear lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see factory built fixture photometric data.

CL



Clear 100°

COMPATIBLE ACCESSORIES

HINGE - HMB-M



Adjustable mounting
bracket - Medium

HINGE - HMB-L



Adjustable mounting
bracket - Large

HINGE - HMB-XL



Adjustable mounting
bracket - XLarge

Q-PIVOT



Small mounting
accessory

Q-PIVOT



Small mounting
accessory

Q-ANGLE



Adjustable mounting
accessory

VHB



Double sided
mounting tape