




# ROND

## Field Assembled Extrusion - Surface

SEE THIS EXTRUSION AS A FACTORY BUILT FIXTURE ▶



- Round surface mount LED aluminum extrusion
- The unique round profile extrusion can be adjusted to a variety of angles in the field with the included mounting clips
- It can be rotated by 45° with mounting clips
- Stainless steel clips are available in satin or black finishes

1 PRODUCT	2 FINISH	3 MOUNTING	4 LENS	5 WIRE INPUT/OUTPUT	6 EXTRUSION LENGTH (IN)
ROND		SST		NI	

Sample Part Number: **ROND-BK-SST-FR-NI-48"**

<b>1</b> PRODUCT	<b>2</b> FINISH	<b>3</b> MOUNTING
ROND	<b>ST</b> Satin <b>BK</b> Black <b>CU</b> Custom Color  Custom finishes require a longer lead time, consult factory	<b>SST</b> Stainless Steel  Refer to following pages for mounting clip option details and provided quantities.
<b>4</b> LENS	<b>5</b> WIRE INPUT/OUTPUT	<b>6</b> EXTRUSION LENGTH (IN)
<b>DF</b> Diffused <b>FR</b> Frosted <b>CL</b> Clear	<b>NI</b> Not Installed	1" increments from 1" - 98.43" Tolerance +0.0"/-0.5"
For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages.		

## COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	STATIC WHITE DOUBLE ROW (SW-DR)	STATIC WHITE HIGH EFFICACY DOUBLE ROW (SW-HE-DR)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
<b>DRY</b>	✓ W/FT: 1.5, 3.0, 4.0, 5.0	✓ W/FT: 1.0, 2.0, 4.0, 6.0		✓ W/FT: 3.0, 6.0				✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0		✓ W/FT: 4.0
<b>DMP</b>	✓ W/FT: 1.5, 3.0, 4.0, 5.0							✓ W/FT: 1.5, 2.5		✓ W/FT: 5.0	✓ W/FT: 6.0		✓ W/FT: 4.0
<b>ENC</b>													
<b>WET</b>													

Field modifications must comply with QTL's installation methods otherwise warranty is null & void | Surface mount | Painted end caps match the extrusion finish | 45° rotation



Declare.






# ROND

## Field Assembled Extrusion - Surface

SEE THIS EXTRUSION AS A FACTORY BUILT FIXTURE ▶


### 1 PRODUCT - DIMENSIONS

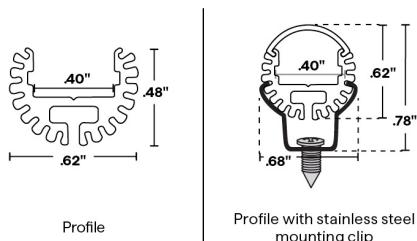

### END CAPS

One pair of end caps is provided with each length of extrusion ordered.


Flat end caps



No feed

To order separately, use  
ROND-EC


### 2 FINISH



Satin  
Black

Custom finishes require a longer lead time, consult factory

### 3 MOUNTING




2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use SST-07

Each clip comes with a #4 x 5/8" Flat Head SS

### 4 DIODE VISIBILITY



DF - Diffused lens  
PR - Polar lens  
FR - Frosted lens  
CL - Clear lens

### PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see factory built fixture photometric data.



Clear 93°

### COMPATIBLE ACCESSORIES

HINGE - HMB-S	HINGE - HMB-M	HINGE - HMB-L	HINGE - HMB-XL	Q-PIVOT	Q-ANGLE
.41" .51"	1.41" .71"	1.46" 1.29"	1.46" 4"	.75"	2.23"
Adjustable mounting bracket - Small	Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory