



TELA



Field Assembled Extrusion - Corner & Surface



Declare.



SEE THIS EXTRUSION AS A FACTORY BUILT FIXTURE ▶

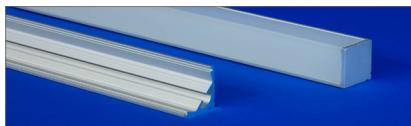

- TELA is a 45-degree angled LED extrusion with a 90-degree two-sided lens that provides diode free viewing and sharp cutoff angles
- the TELA extrusion is perfect for under-cabinet applications preventing the light from spilling past the edge of the countertop
- Combine TELA with White Optics to increase light output between 3-15%

1 PRODUCT	2 FINISH	3 MOUNTING	4 LENS	5 WIRE INPUT/OUTPUT	6 EXTRUSION LENGTH (IN)
				NI	

Sample Part Number: **TELA-WO-BZ-PL-FR-NI-48"**

1 PRODUCT	2 FINISH	3 MOUNTING	4 LENS	5 WIRE INPUT/OUTPUT	6 EXTRUSION LENGTH (IN)
TELA TELA-WO WO - WhiteOptics (Internal coating, greater lumen output)	ST Satin BK Black BZ Bronze CU Custom Color	SST Stainless Steel PL Plastic Clip	DF Diffused FR Frosted	NI Not Installed	1" increments from 1" - 98.43" Tolerance +0.0"/-0.5"

Custom finishes require a longer lead time, consult factory

Refer to following pages for mounting clip option details and provided quantities.

For representation of LED visibility, see Diode Visibility section on following pages.

For beam angles, see Photometric Performance section on following pages.

COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	STATIC WHITE DOUBLE ROW (SW-DR)	STATIC WHITE HIGH EFFICACY DOUBLE ROW (SW-HE-DR)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY	✓ W/FT: 15, 30, 40, 5.0	✓ W/FT: 10, 20, 40, 6.0	✓ W/FT: 15, 30, 60, 9.0	✓ W/FT: 30, 6.0				✓ W/FT: 15, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
DMP	✓ W/FT: 15, 30, 40, 5.0		✓ W/FT: 15, 30, 6.0					✓ W/FT: 15, 2.5		✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
ENC													
WET	✓ W/FT: 15, 30, 40, 5.0	✓ W/FT: 10, 20, 4.0		✓ W/FT: 30, 6.0				✓ W/FT: 15, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0		✓ W/FT: 4.0

Field modifications must comply with QTL's installation methods otherwise warranty is null & void | Painted end caps match the extrusion finish and have a white painted interior. Satin end caps utilize a metallic paint.




TELA


Field Assembled Extrusion - Corner & Surface

SEE THIS EXTRUSION AS A FACTORY BUILT FIXTURE ▶


1 PRODUCT - DIMENSIONS



Profile



Profile with stainless steel mounting clip




Profile with plastic mounting clip

END CAPS

One pair of end caps is provided with each length of extrusion ordered.

Flat end caps



No feed


To order separately, use TELA-
EC

WHITEOPTICS® PHOTOMETRICS

[Calculated L70(6k) - 70000 hours] Tested with SW24/5.0-DRY-30

	TELA LM/FT		TELA-WO LM/FT		TELA-WO Lumen Increase	
	Satin	Black/Bronze	Satin	Black/Bronze	Satin	Black/Bronze
Frosted	408	391	420	414	3%	6%
Diffused	359	327	380	377	6%	15%

2 FINISH



Satin


Black

Bronze

Custom finishes require
a longer lead time,
consult factory

3 MOUNTING

SST




Stainless Steel Clip

2 clips provided for 4' or less; 4 clips provided
for greater than 4'

To order separately use SST-03

Each clip comes with a #4 x 5/8" Flat Head SS

PL



Plastic Clip

2 clips provided for 4' or less; 4 clips provided
for greater than 4'

To order separately use PLC-01

Each clip comes with a #4 x 5/8" Flat Head SS



TELA

Field Assembled Extrusion - Corner & Surface

SEE THIS EXTRUSION AS A FACTORY BUILT FIXTURE ▶

4 DIODE VISIBILITY




DF - Diffused lens

FR - Frosted lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see factory built fixture photometric data.



Clear 130°

COMPATIBLE ACCESSORIES

HINGE - HMB-M 1.41" x .71"	HINGE - HMB-L 1.46" x 1.29"	HINGE - HMB-XL 1.46" x 4"	Q-PIVOT .75" x 1.03"	Q-ANGLE 2.23" x 1.38"	QUOVA-STANDARD QUOVA Knife Edge	VHB Double sided mounting tape	SD-J-LARGE J Mounting Bracket
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory			