





# WIDE

## Field Assembled Extrusion - Surface

SEE THIS EXTRUSION AS A FACTORY BUILT FIXTURE ▶

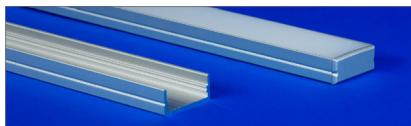

- A wide aluminum profile capable of accommodating our widest LED light engines
- Has a unique plastic mounting clip
- Produces a 97° beam angle with a clear lens
- Can be configured with in-fed wires, back-fed wires, and wires from the left and right for both lead and exit, giving you more freedom with your design

1 PRODUCT	2 FINISH	3 MOUNTING	4 LENS	5 WIRE INPUT/OUTPUT	6 EXTRUSION LENGTH (IN)
WIDE				NI	

Sample Part Number: **WIDE-BZ-PL-PR-NI-48"**

<b>1</b> PRODUCT	<b>2</b> FINISH	<b>3</b> MOUNTING	<b>4</b> LENS	<b>5</b> WIRE INPUT/OUTPUT	<b>6</b> EXTRUSION LENGTH (IN)
WIDE	<b>ST</b> Satin <b>BK</b> Black <b>BZ</b> Bronze <b>CU</b> Custom Color <p>Custom finishes require a longer lead time, consult factory</p>	<b>SST</b> Stainless Steel <b>PL</b> Plastic Clip <p>Refer to following pages for mounting clip option details and provided quantities.</p>	<b>DF</b> Diffused <b>PR</b> Polar <b>FR</b> Frosted <b>CL</b> Clear <p>For representation of LED visibility, see Diode Visibility section on following pages.</p> <p>For beam angles, see Photometric Performance section on following pages.</p>	<b>NI</b> Not Installed <p>1" increments from 1" - 98.43" Tolerance +0.0"/-0.5"</p>	

## COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	STATIC WHITE DOUBLE ROW (SW-DR)	STATIC WHITE HIGH EFFICACY DOUBLE ROW (SW-HE-DR)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
<b>DRY</b>	✓ W/FT: 15, 30, 4.0, 5.0	✓ W/FT: 10, 20, 4.0, 6.0	✓ W/FT: 15, 30, 6.0	✓ W/FT: 3.0, 6.0				✓ W/FT: 1.5, 2.5, 4.0	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0 NO CLEAR LENS
<b>DMP</b>	✓ W/FT: 15, 30, 4.0, 5.0		✓ W/FT: 15, 30, 6.0					✓ W/FT: 1.5, 2.5		✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0 NO CLEAR LENS
<b>ENC</b>													
<b>WET</b>	✓ W/FT: 15, 30, 4.0, 5.0	✓ W/FT: 10, 20, 4.0	✓ W/FT: 15, 30, 6.0	✓ W/FT: 3.0, 6.0	✓ W/FT: 3.0			✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0 NO CLEAR LENS

Field modifications must comply with QTL's installation methods otherwise warranty is null & void | Surface mount || Painted end caps match the extrusion finish and have a white painted interior. Satin end caps utilize a metallic paint



Declare.






# WIDE

## Field Assembled Extrusion - Surface


SEE THIS EXTRUSION AS A FACTORY BUILT FIXTURE ▶

### 1 PRODUCT - DIMENSIONS

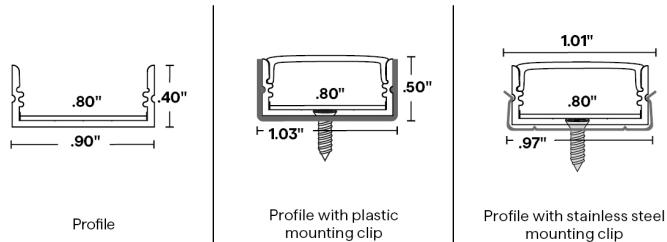

### END CAPS

One pair of end caps is provided with each length of extrusion ordered.



No feed


To order separately, use  
WIDE-EC

### 2 FINISH



Custom finishes require a longer lead time, consult factory

### 3 MOUNTING




Stainless Steel Clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use SST-09

Each clip comes with a #4 x 5/8" Flat Head SS

PL



Plastic Clip  
Black clip standard with black extrusion

2 clips provided for 4' or less; 4 clips provided for greater than 4'.

To order separately use PLC-03

Each clip comes with a #4 x 5/8" Flat Head SS


### 4 DIODE VISIBILITY



### PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see factory built fixture photometric data.

CL



Clear 97°

### COMPATIBLE ACCESSORIES

HINGE - HMB-M



Adjustable mounting bracket - Medium

HINGE - HMB-L




Adjustable mounting bracket - Large

HINGE - HMB-XL



Adjustable mounting bracket - XLarge

Q-PIVOT



Small mounting accessory

Q-ANGLE



Adjustable mounting accessory

QUOVA-STANDARD



QUOVA Knife Edge

VHB



Double sided mounting tape

SHIELD B - Small



For use within extrusions

SHIELD B - Medium



For use within extrusions

SHIELD B - Large



For use within extrusions