




NL-LARGE

L BRACKET - ALUMINUM EXTRUSION

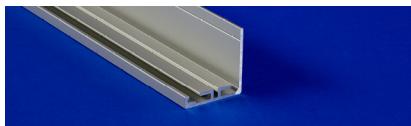


- L bracket with no reveal, creating the least amount of cutoff
- Surface mounts from the side, best for wall applications
- Mounts a large family of fixtures, LED light engines, and SHIELD
- Paintable finish
- Intended for indoor use only
- Screw mounting track for field installation of fixtures
- Inline bracket slot for seamless run connections
- Durable anodized aluminum

1 PRODUCT	2 FINISH	3 LENGTH (IN)
NL-LARGE		

Sample Part Number: **NL-LARGE-ST-48"**

1 PRODUCT	2 FINISH	3 LENGTH (IN)
NL-LARGE	ST BK Satin Black	1" increments from 2" - 98.43" Tolerance +0.0"/-0.5" Light engine ordered separately

1 PRODUCT - DIMENSIONS WITH RECOMMENDED PROFILES

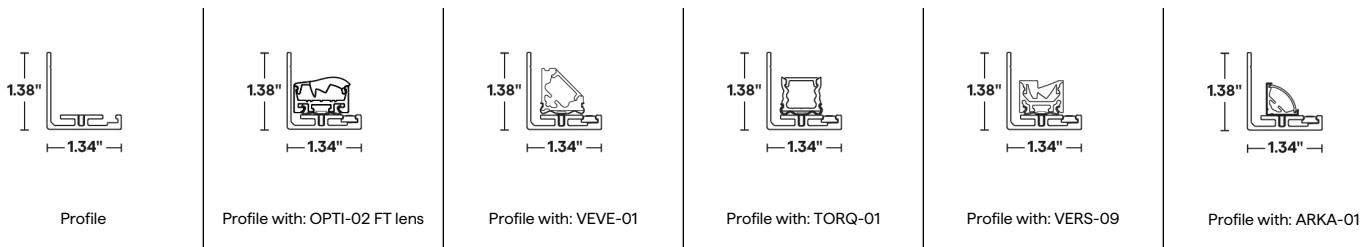

Field modifications must comply with QTL's installation methods otherwise warranty is null & void | Corner/surface mount



NL-LARGE

L BRACKET - ALUMINUM EXTRUSION

2 FINISH



Satin

Black

COMPATIBILITY CHART

Lens Notes	Works with: ARKA-01	Works with: TELA-01	Works with: VEVE-01, VEVE-03	Works with: 40D lens, 60D lens, 70D lens, 90D lens, 110D lens, 155D lens, ASYM lens, FT Lens	Works with: VERS-01, VERS-02, VERS-03, VERS-05, VERS-06, VERS-07, VERS-08, VERS-09	Works with: TORQ-01, TORQ-03	Works with: TORQ-01, TORQ-03		
SST-01 Stainless Steel Clip			✓	✓		✓			
SST-03 Stainless Steel Clip	✓	✓							
CC-01 Concealed Clip					✓				
WSC White Snug Clip							✓	✓	✓
VHB	✓	✓	✓			✓	✓	✓	✓




NL-LARGE


L BRACKET - ALUMINUM EXTRUSION

PHOTOMETRIC PERFORMANCE

Order separately | Tested with SW24/5.0 at 3000K

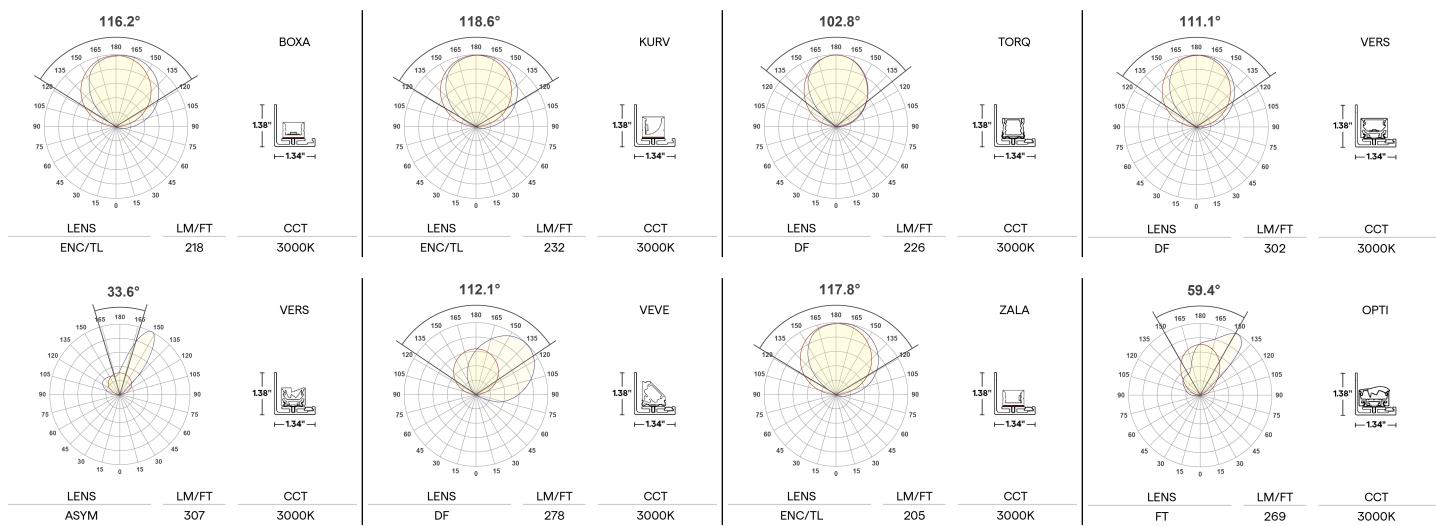

JOINER/CONNECTORS



Inline Bracket

1 per length included

6/32" stainless steel, flat tip set
screws, 1/8" long