



SW-ZZ24/4.0

LED Strips - Static White Zig-Zag



- Energy-efficient, static white zig-zag LED tape
- Delivers *** lm/ft @ 3000K

1 V/WATTS	2 RATED	3 CCT	4 CONNECTOR/WIRE IN	5 CONNECTOR/WIRE OUT	6 WIRE COLOR	7 WIRE TYPE	8 ILLUMINATED LENGTH
SW-ZZ24/4.0	DRY						

Sample Part Number: SW-ZZ24/4.0-DRY-30-BW-CLS-WH-CL2-48"

1 V/WATTS SW-ZZ24/4.0 Voltage: 24VDC Wattage: 4.0W/ft See following pages for compatible power supplies.	2 RATED DRY IP20	3 CCT 22 2200K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K	4 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") CLS Closed End (No feed) CON6 Connector 6" CON24 Connector 24" Connector/Wire In not needed to specify product. Typical selection is BW. BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	5 CONNECTOR/WIRE OUT BW Bare Wire (Standard 24") CLS Closed End (No feed) CON6 Connector 6" CON24 Connector 24" Connector/Wire Out not needed to specify product. Typical selection is CLS or BW. BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)
6 WIRE COLOR WH White BK Black	7 WIRE TYPE CL2 Class 2 CL2P Class 2 Plenum Rated CL2P only available with bare wire leads (BW)	8 ILLUMINATED LENGTH 4.18" increments		

COMPATIBLE EXTRUSIONS

	WIDE	ROND	TORQ	TRE3	LALO	TALO	ARKA	TELA	VEVE	FLUR	EMBD	LATO	MDIN	OPTI-FLAT	OPTI-OPTICS	THIN
DRY	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
DMP																
WET																

5 year warranty | Warranty only valid with QTL power supplies | Field modifications must comply with QTL's installation methods otherwise warranty is null & void | All data has +/- 5% tolerance | UL Listed | Suitable for installation in the storage area of a clothes closet when assembled as a fixture at QTL facility




SW-ZZ24/4.0

LED Strips - Static White Zig-Zag

4 / 5 CONNECTOR/WIRE - IN/OUT


Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

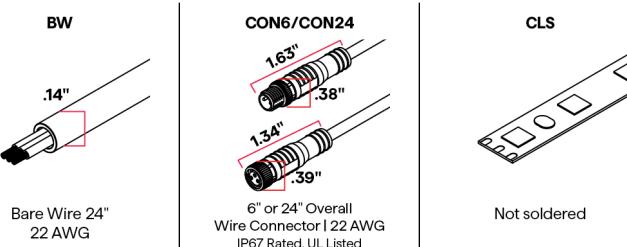

6 WIRE COLOR



8 ILLUMINATED LENGTH - DIMENSIONS



Section (in)	A	B	C	D
DRY (IP20)	0.24"	0.37"	4.18"	0.06"

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	
	SW-ZZ	
Dim to Black		Q6M-DC+CAP QTM-DC+CAP IO-PH+QD1
0.1%		QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%		QTM-eLED(E) QZ-DALI-DT6
10%		Non-Dim Power Supply with SW App Dongle



SW-ZZ24/4.0

LED Strips - Static White Zig-Zag

DIMMING PROTOCOL	INDOOR
	SW-ZZ
Non-Dim	QTM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1
0-10V	QTM-eLED+0-10V QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6-AWN
ECO System	QTM-eLED(E)
DMX	QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle

COMPATIBLE WIRING ACCESSORIES

