



# SW24/5.0

LED Strips - Static White



CE Declare UK CA



- One bin, one step static white LED strip with 454 lm/ft @ 3000K
- 6 diodes per 1" cut point
- CCTs 2200K and greater meet or exceed Title 24 and JA8
- Ambient operating temp: -4-120°F
- Installation temp: 50-100°F | Storage temp: -4-140°F
- Calculated L70 = 70000 hrs

1 V/WATTS	2 RATED	3 CCT	4 CONNECTOR/WIRE IN	5 CONNECTOR/WIRE OUT	6 WIRE COLOR	7 WIRE TYPE	8 ILLUMINATED LENGTH
SW24/5.0							

Sample Part Number: **SW24/5.0-DMP-24-CON6-CLS-WH-CL2-48"**

1 V/WATTS	2 RATED	3 CCT	4 CONNECTOR/WIRE IN	5 CONNECTOR/WIRE OUT
<b>SW24/5.0</b>  Voltage: 24VDC Wattage: 5.0W/ft See following pages for compatible power supplies.	<b>DRY</b> IP20 <b>DMP</b> IP54 <b>WET</b> IP67	<b>18</b> 1800K <b>20</b> 2000K <b>22</b> 2200K <b>24</b> 2400K <b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K	<b>BW</b> Bare Wire (Standard 24") <b>BRL</b> Barrel <b>CLS</b> Closed End (No feed) <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"	<b>BW</b> Bare Wire (Standard 24") <b>BRL</b> Barrel <b>CLS</b> Closed End (No feed) <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"
			Connector/Wire In not needed to specify product. Typical selection is BW. BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	Connector/Wire Out not needed to specify product. Typical selection is CLS or BW. BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)
6 WIRE COLOR	7 WIRE TYPE	8 ILLUMINATED LENGTH		
<b>WH</b> White <b>BK</b> Black <b>N/A</b> Specify for Barrel  Barrel is white	<b>CL2</b> Class 2 <b>CL2P</b> Class 2 Plenum Rated <b>N/A</b> Specify for Barrel  CL2P only available with bare wire leads (BW)	  DRY: 1"-288" in 1" increment DMP: 1"-180" in 1" increment WET: 1"-288" in 1" increment  Dry version also available in reel lengths of 19.2' (Class 2) and 100'. Each reel will have a 2' soldered lead wire attached. Contact factory for larger reels.  Available in reel lengths of 19.2' (Class 2) and 100'. Each reel will have a 2' soldered lead wire attached. Contact factory for larger reels.		

## COMPATIBLE EXTRUSIONS

	WIDE	ROND	TORQ	TRES	LALO	TALO	ARKA	TELA	VEVE	FLUR	EMBD	LATO	MDIN	OPTI-FLAT	OPTI-OPTICS	THIN
<b>DRY</b>	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
<b>DMP</b>	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓
<b>WET</b>	✓			✓ EXCLUDES 40° LENS	✓	✓	✓	✓	✓ EXCLUDES 45° LENS	✓	✓ EXCLUDES 30°, 45°, 60° LENS	✓	✓	✓		✓

5 year warranty | Warranty only valid with QTL power supplies | Field modifications must comply with QTL's installation methods otherwise warranty is null & void | All data has +/- 5% tolerance | UL Listed | Title 24 - JA8-2016 Strips: DRY, DMP, and WET rated, 2200K and above



# SW24/5.0

## LED Strips - Static White

### 3 CCT – LUMENS/CRI - DELIVERED LUMENS

#### DRY

[Calculated L70 = 70000 hrs]  
Tested with SW24/5.0-DRY

CCT	Lumen/ft	Luminous Efficacy	CRI Ra	CRI R9	TM30 Rf	TM30 Rg
2000K	377	79 Lm/W	93	59	89	103
2200K	380	79 Lm/W	96	89	94	100
2400K	405	84 Lm/W	97	92	94	102
2700K	423	88 Lm/W	97	94	94	102
3000K	454	95 Lm/W	98	95	94	101
3500K	468	97 Lm/W	98	94	92	100
4000K	442	92 Lm/W	97	93	90	100

#### DMP

[Calculated L70 = 70000 hrs]  
Tested with SW24/5.0-DMP

CCT	Lumen/ft	CRI Ra
2000K	**	**
2200K	**	**
2400K	**	**
2700K	**	**
3000K	**	**
3500K	**	**
4000K	**	**

#### WET

[Calculated L70 = 70000 hrs]  
Tested with SW24/5.0-WET


CCT	Lumen/ft	CRI Ra
2000K	311	93
2200K	333	96
2400K	343	96
2700K	346	96
3000K	367	97
3500K	401	97
4000K	408	97

### TEMPERATURE RATINGS


		Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	120°F
	Storage Temp	-4°F	140°F
	Installation Temp	50°F	100°F

### 4 / 5 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

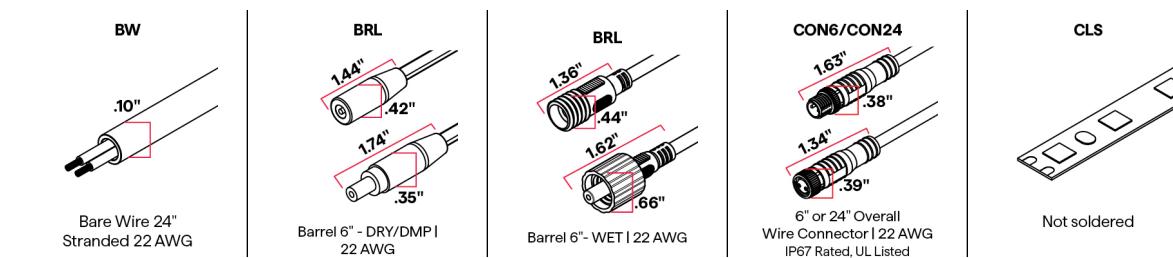


### 6 WIRE COLOR



White  
Black

### 8 ILLUMINATED LENGTH - DIMENSIONS

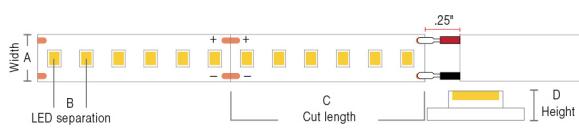

Section (in)	A	B	C	D
DRY (IP20)	0.32"	0.16"	1.00"	0.06"
DMP (IP54)	0.32"	0.16"	1.00"	0.12"
WET (IP67)	0.39"	0.16"	1.00"	0.21"



# SW24/5.0

## LED Strips - Static White

### COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	SW24/5.0, SW-HE, SW-HE+	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	




# SW24/5.0

## LED Strips - Static White

DIMMING PROTOCOL	INDOOR	OUTDOOR
	SW24/5.0, SW-HE, SW-HE+	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	
ECO System	QTM-eLED(E)	
DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	

## COMPATIBLE MOUNTING ACCESSORIES

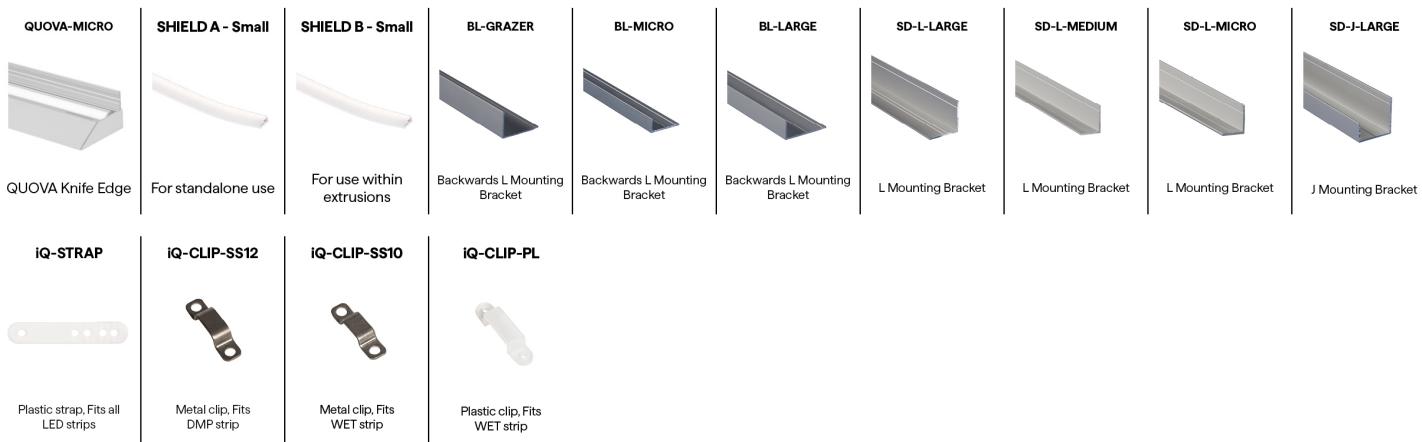



# SW24/5.0

## LED Strips - Static White

### COMPATIBLE WIRING ACCESSORIES

<b>SNP-LEAD</b>	<b>SNP-INLINE</b>	<b>CLP-LEAD</b>	<b>CLP-INLINE</b>	<b>Q-NECT-01-LEAD-24</b>	<b>Q-NECT-01-JUMP-3</b>	<b>Q-NECT-01-INLINE</b>	<b>Q-NECT-SCREW-LEAD-12</b>	<b>Q-NECT-SCREW-JUMP-12</b>	<b>BARREL-EXT</b>
Connects lead wire to LED strip DRY ONLY	Connects LED strip to LED strip DRY ONLY	Connects lead wire to LED strip DRY ONLY	Connects LED strip to LED strip DRY ONLY	Connects LED board to 24" lead wire DRY ONLY	Connects two LED boards together with 3" jumper, DRY ONLY	Connects two LED boards together DRY ONLY	Connects LED board to 12" lead wire DRY ONLY	Connects two LED boards together with 12" jumper, DRY ONLY	8ft barrel cable extender DRY ONLY
<b>BARREL FOUR-FER</b>	<b>CON120-EXT</b>	<b>CON FOUR-FER</b>	<b>CON M - BARREL F</b>	<b>Q-mini-J</b>	<b>Q-mini-J5</b>	<b>INSTALLATION KITS</b>			
Splits lead from one to four LED Barrel connector fixtures, DRY/DMP	10ft Con cable extender DRY/DMP/WET	Splits lead from one to four LED Con connectors DRY/DMP/WET	Male con to barrel cable adaptor DRY/DMP	UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	LEAD or JUMP DRY or WET LED strip wiring kits			

### COMPATIBLE CONTROL ACCESSORIES

#### SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

### COMPATIBLE APPS

#### NFC APP



Read and write DMX addresses and adjust voltage