



SD-SW24/1.0

LED Strips - Static White Standard Series



CE Declare

UK
CA



- Part of our Standard collection
- Offered in dry or wet
- Available in full reels or custom cut lengths
- For factory built fixture, contact factory

1 V/WATTS	2 RATED	3 CCT - LUMENS/CRI	4 CONNECTOR/WIRE IN	5 CONNECTOR/WIRE OUT	6 WIRE COLOR	7 WIRE TYPE	8 ILLUMINATED LENGTH
SD-SW24/1.0							

Sample Part Number: SD-SW24/1.0-DRY-30-CON6-CON6-WH-CL2-48"

1 V/WATTS SD-SW24/1.0 Voltage: 24VDC Wattage: 1.0W/ft See following pages for compatible power supplies.	2 RATED DRY IP20	3 CCT - LUMENS/CRI 22 2200K 83/97 24 2400K 98/98 27 2700K 107/97 30 3000K 109/97 35 3500K 120/99 40 4000K 113/96	4 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") BRL Barrel CLS Closed End (No feed) CON6 Connector 6" CON24 Connector 24" Connector/Wire In not needed to specify product. Typical selection is BW. BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	5 CONNECTOR/WIRE OUT BW Bare Wire (Standard 24") BRL Barrel CLS Closed End (No feed) CON6 Connector 6" CON24 Connector 24" Connector/Wire Out not needed to specify product. Typical selection is CLS or BW. BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)
	WET IP67	22 2200K 73/97 24 2400K 86/98 27 2700K 93/97 30 3000K 98/98 35 3500K 105/99 40 4000K 103/97	4 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") BRL Barrel CLS Closed End (No feed) CON6 Connector 6" CON24 Connector 24" Connector/Wire In not needed to specify product. Typical selection is BW. BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	5 CONNECTOR/WIRE OUT BW Bare Wire (Standard 24") BRL Barrel CLS Closed End (No feed) CON6 Connector 6" CON24 Connector 24" Connector/Wire Out not needed to specify product. Typical selection is CLS or BW. BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)
6 WIRE COLOR DRY ► WH White BK Black N/A Specify for Barrel Barrel is white	7 WIRE TYPE CL2 Class 2 CL2P Class 2 Plenum Rated N/A Specify for Barrel CL2P only available with bare wire leads (BW)	8 ILLUMINATED LENGTH 2"-768" 2" increments Sold in reels of 25', 100', or 500'. For Class 2 low voltage, maximum 96' run length per 96W output. Reels do not include leads.		
6 WIRE COLOR WET ► WH White BK Black N/A Specify for Barrel Barrel is black	7 WIRE TYPE CL2 Class 2 CL2P Class 2 Plenum Rated N/A Specify for Barrel CL2P only available with bare wire leads (BW)	8 ILLUMINATED LENGTH 2"-360" 2" increments Sold in reels of 25'. For Class 2 low voltage, maximum 96' run length per 96W output. Reels do not include leads.		

5 year warranty | Warranty only valid with QTL power supplies | Field modifications must comply with QTL's installation methods otherwise warranty is null & void | All data has +/- 5% tolerance | UL Listed



SD-SW24/1.0

LED Strips - Static White Standard Series

3 CCT – LUMENS/CRI - DELIVERED LUMENS


[Calculated L70 = 58000 hrs]

Tested with SD-SW24/1.0-DRY


CCT	Lumen/ft	Luminous Efficacy	CRI Ra	CRI R9	TM30 Rf	TM30 Rg
2200K	83	79 Lm/W	97	89	95	99
2400K	98	93 Lm/W	98	97	95	104
2700K	107	102 Lm/W	97	98	96	103
3000K	109	103 Lm/W	97	94	95	100
3500K	120	113 Lm/W	99	93	96	100
4000K	113	107 Lm/W	96	82	93	102

4 / 5 CONNECTOR/WIRE – IN/OUT


Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

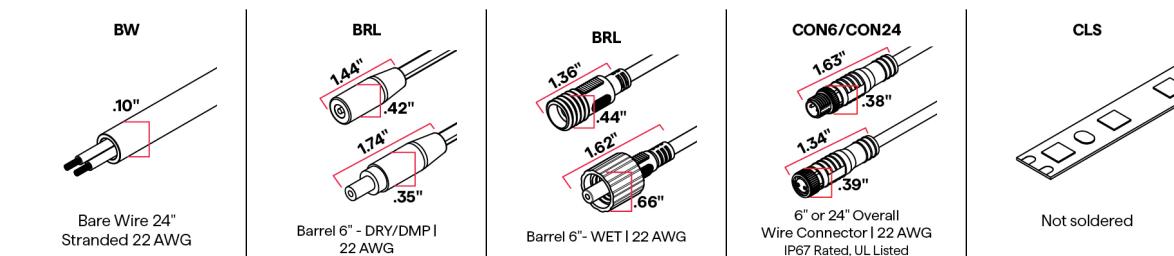

6 WIRE COLOR



8 ILLUMINATED LENGTH - DIMENSIONS

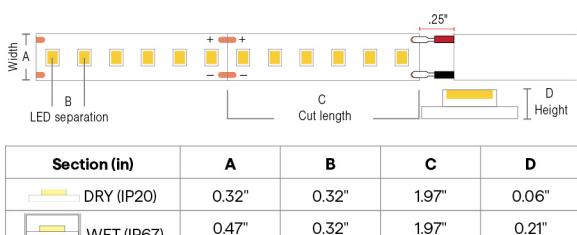

COMPATIBLE EXTRUSIONS

	WIDE	ROND	TORQ	TRE3	LALO	TALO	ARKA	TELA	VEVE	FLUR	EMBD	LATO	MDIN	OPTI-FLAT	OPTI-OPTICS	THIN
DRY	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
DMP																
WET	✓			✓ EXCLUDES 40° LENS	✓	✓	✓	✓	✓ EXCLUDES 45° LENS	✓	✓ EXCLUDES 30°, 45°, 60° LENS	✓	✓	✓	✓ NO LENS	



SD-SW24/1.0

LED Strips - Static White Standard Series

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	SD-SW24/1.0-4.0	SD-SW24/1.0-4.0
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED



SD-SW24/1.0

LED Strips - Static White Standard Series

DIMMING PROTOCOL	INDOOR	OUTDOOR
	SD-SW24/1.0-4.0	SD-SW24/1.0-4.0
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	
ECO System	QTM-eLED(E)	
DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	

COMPATIBLE MOUNTING ACCESSORIES

 QUOVA-MICRO	 SHIELD A - Small	 SHIELD B - Small	 BL-GRAZER	 BL-MICRO	 BL-LARGE	 SD-L-LARGE	 SD-L-MEDIUM	 SD-L-MICRO	 SD-J-LARGE
QUOVA Knife Edge	For standalone use	For use within extrusions	Backwards L Mounting Bracket	Backwards L Mounting Bracket	Backwards L Mounting Bracket	L Mounting Bracket	L Mounting Bracket	L Mounting Bracket	J Mounting Bracket
 iQ-STRAP	 iQ-CLIP-SS10	 iQ-CLIP-PL							
Plastic strap, Fits all LED strips	Metal clip, Fits WET strip	Plastic clip, Fits WET strip							



SD-SW24/1.0

LED Strips - Static White Standard Series

COMPATIBLE WIRING ACCESSORIES

SNP-LEAD	SNP-INLINE	CLP-LEAD	CLP-INLINE	Q-NECT-01-LEAD-24	Q-NECT-01-JUMP-3	Q-NECT-01-INLINE	Q-NECT-SCREW-LEAD-12	Q-NECT-SCREW-JUMP-12	Q-mini-J
Connects lead wire to LED strip DRY ONLY	Connects LED strip to LED strip DRY ONLY	Connects lead wire to LED strip DRY ONLY	Connects LED strip to LED strip DRY ONLY	Connects LED board to 24" lead wire DRY ONLY	Connects two LED boards together with 3" jumper, DRY ONLY	Connects two LED boards together DRY ONLY	Connects LED board to 12" lead wire DRY ONLY	Connects two LED boards together with 12" jumper, DRY ONLY	UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage