



SW-ZZ24/4.0

LED Strips - Static White Zig-Zag



- Energy-efficient, static white zig-zag LED tape
- Delivers *** lm/ft @ 3000K

1 V/WATTS	2 RATED	3 CCT - LUMENS/CRI	4 CONNECTOR/WIRE IN	5 CONNECTOR/WIRE OUT	6 WIRE COLOR	7 WIRE TYPE	8 ILLUMINATED LENGTH
SW-ZZ24/4.0	DRY						

Sample Part Number: **SW-ZZ24/4.0-DRY-30-BW-CLS-WH-CL2-48"**

1 V/WATTS SW-ZZ24/4.0 Voltage: 24VDC Wattage: 4.0W/ft See following pages for compatible power supplies.	2 RATED DRY IP20	3 CCT - LUMENS/CRI 22 2200K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K	4 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") CLS Closed End (No feed) CON6 Connector 6" CON24 Connector 24" Connector/Wire In not needed to specify product. Typical selection is BW. BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	5 CONNECTOR/WIRE OUT BW Bare Wire (Standard 24") CLS Closed End (No feed) CON6 Connector 6" CON24 Connector 24" Connector/Wire Out not needed to specify product. Typical selection is CLS or BW. BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)
6 WIRE COLOR WH White BK Black	7 WIRE TYPE CL2 Class 2 CL2P Class 2 Plenum Rated CL2P only available with bare wire leads (BW)			8 ILLUMINATED LENGTH 24' MAX RUN LENGTH 4.18" increments

5 year warranty | Warranty only valid with QTL power supplies | Field modifications must comply with QTL's installation methods otherwise warranty is null & void | All data has +/- 5% tolerance | UL Listed | Suitable for installation in the storage area of a clothes closet when assembled as a fixture at QTL facility



SW-ZZ24/4.0

LED Strips - Static White Zig-Zag


3 CCT – LUMENS/CRI - DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with SW-ZZ24/4.0-DRY


CCT	Lumen/ft	Luminous Efficacy	CRI Ra	CRI R9	TM30 Rf	TM30 Rg
2200K	***	** Lm/W	**	**	**	***
2400K	***	** Lm/W	**	**	**	***
2700K	***	** Lm/W	**	**	**	***
3000K	***	** Lm/W	**	**	**	***
3500K	***	** Lm/W	**	**	**	***
4000K	***	** Lm/W	**	**	**	***

4 / 5 CONNECTOR/WIRE – IN/OUT


Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

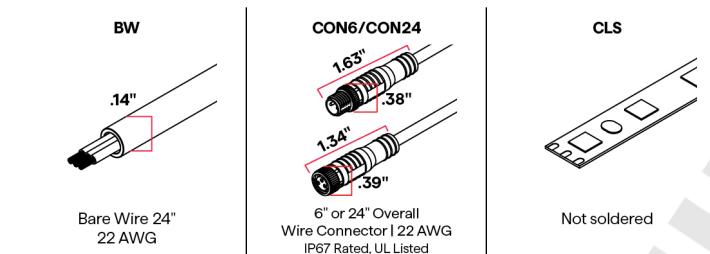

6 WIRE COLOR



8 ILLUMINATED LENGTH - DIMENSIONS



Section (in)	A	B	C	D
DRY (IP20)	0.24"	0.37"	4.18"	0.06"

COMPATIBLE EXTRUSIONS

	WIDE	ROND	TORQ	TRE3	LAZO	TALO	ARKA	TELA	VEVE	FLUR	EMBD	LATO	MDIN	OPTI-FLAT	OPTI-OPTICS	THIN
DRY	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
DMP																
WET																



SW-ZZ24/4.0

LED Strips - Static White Zig-Zag

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	SW-ZZ
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%	QTM-eLED(E) QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle


DIMMING PROTOCOL	INDOOR
	SW-ZZ
Non-Dim	QTM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1
0-10V	QTM-eLED+0-10V QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6-AWN
ECO System	QTM-eLED(E)
DMX	QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle



SW-ZZ24/4.0

LED Strips - Static White Zig-Zag

COMPATIBLE WIRING ACCESSORIES

Q-mini-J5	CON120-EXT	CLP-INLINE	CLP-LEAD	INSTALLATION KITS
 2.80" x 2.27" x 1.25" (W x H x D) UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	 10ft Con cable extender DRY/DMP/WET	 .78" x .30" x .50" (W x H x D) Connects LED strip to LED strip DRY ONLY	 .96" x .30" x .50" (W x H x D) Connects lead wire to LED strip DRY ONLY	 LEAD or JUMP DRY and WET LED strip wiring kits

PRELIMINARY
SUBJECT TO CHANGE