



ESSENTIALS LALO-FLAT- OCCUPANCY (01) SC



24VDC Linear Fixtures - Surface & Recessed



5 YEAR
WARRANTY



Declare.

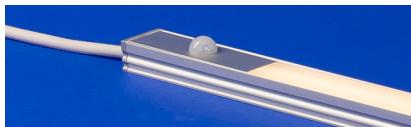

- Shallow, low-profile fixture for surface or recessed installations
- Choose from diffused, polar, frosted, or clear lens options for varying diode visibility and beam angles
- Flanged design merges light source with surface
- Built-in occupancy sensor
- Detects movement up to 10' away and switches off after no movement is detected for 30 seconds
- Mounting options include stainless steel clips, magnets, and low-profile magnet mounts
- Features painted end caps to match extrusion finish
- Red, Green, Blue or Amber LEDs available
- Q-Tran Red & Amber LED products are Florida Fish and Wildlife Conservation Commission certified, making them safe for turtles and other wildlife

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS	7 EXTERNAL LOUVER	8 WIRE INPUT/ OUTPUT	9 CONNECTOR / WIRE IN	10 CONNECTOR / WIRE OUT	11 WIRE COLOR	12 WIRE TYPE	13 MOUNTING	14 FINISH	15 LENGTH (IN)	16 EXACT/ OPTIMAL
LL1SC-OC	5.0		DRY	STD											

Sample Part Number: LL1SC-OC-5.0-GR-DRY-STD-DF-P1-BW-BW-BK-CL2-SST-BK-48"-E

1 PRODUCT LL1SC-OC See following pages for compatible power supplies.	2 WATTS/FT 5.0 5.0W/ft	3 CCT A Amber B Blue G Green R Red	4 RATED DRY IP20	5 EFFICIENCY STD Standard	6 LENS DF Diffused PR Polar FR Frosted CL Clear	7 EXTERNAL LOUVER L1-WH White Plastic L1-BK Black Plastic N/A No Louver Louvers are shipped separately and require field assembly
8 WIRE INPUT/OUTPUT S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed For continuous mounting, consider bottom feed.	9 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24" Connector/Wire In not needed to specify product. Typical selection is BW. BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	10 CONNECTOR/WIRE OUT CLS Closed End (No feed)	11 WIRE COLOR WH White BK Black N/A For Barrel wet barrel only available in black			
P1 Pass Through 1 (Input/output) - End Feed P2 Pass Through 2 (Input/output) - Bottom Feed For continuous mounting, consider bottom feed.	BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24" Connector/Wire In not needed to specify product. Typical selection is BW. BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24" Connector/Wire Out not needed to specify product. Typical selection is CLS or BW. BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)				
12 WIRE TYPE CL2 Class 2 CL2P Plenum Rated N/A For Barrel CL2P only available with bare wire leads (BW)	13 MOUNTING SST Stainless Steel M4 Low Profile Magnet MG Magnet	14 FINISH ST Satin BK Black CU Custom	15 LENGTH (IN) Fixture length min 12", max 98.43" not including end caps. Tolerance +0 - 1/8". Consult factory for lengths under 12".	16 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures are the exact length specified +0 - 1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.		


Motion: Auto on | No Motion: 30 second time out | Occupancy Sensor not programmable | Do not install with dimmer | 5 year warranty | Warranty only valid with QTL non-dimming power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



ESSENTIALS LALO-FLAT-OCCUPANCY (01) SC

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS

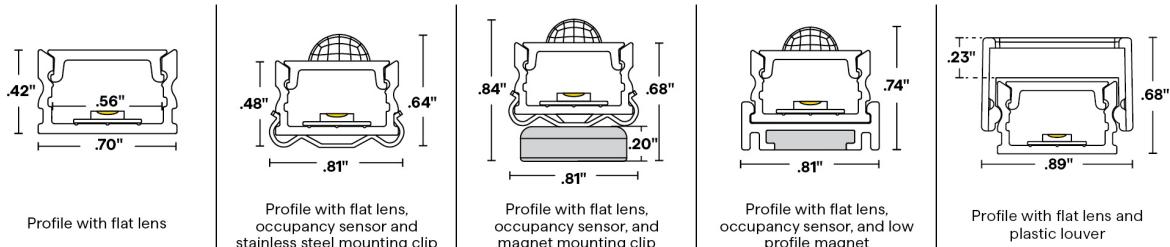

2 DELIVERED LUMENS

[Calculated L70 = 30000 hrs]
Tested with LL1SC-5.0-**-DRY-STD

	Red		Green		Blue		Amber	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH
CL	82	633	444	517	115	466	74	597
FR	82	633	443	517	115	466	74	597
PR	74	633	399	517	103	466	67	597
DF	66	633	358	517	93	466	60	597

6 DIODE VISIBILITY



DF - Diffused lens
PR - Polar lens
FR - Frosted lens
CL - Clear lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



Clear 78°

TEMPERATURE RATINGS

	5.0 W/FT	
	Min	Max
Ambient Operating Temp - Surface	-4°F	115°F
Storage Temp	-4°F	140°F
Install Temp	50°F	100°F




ESSENTIALS LALO-FLAT-OCCUPANCY (01) SC


24VDC Linear Fixtures - Surface & Recessed

7 EXTERNAL LOUVER

PLASTIC

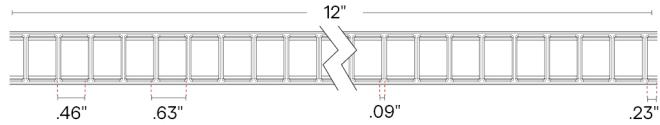

L1-XX




Lumen Multiplier

WH BK


0.72 0.53

8 WIRE INPUT/OUTPUT




SINGLE (Input only)

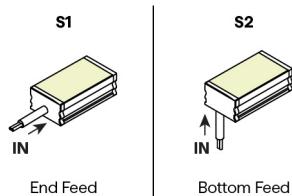


PASS THROUGH (Input/Output)

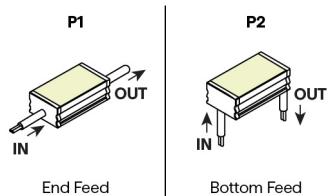


CONFIGURATION OPTIONS

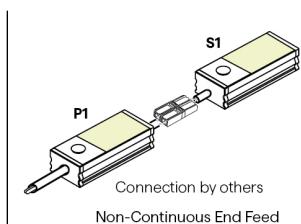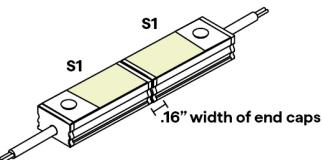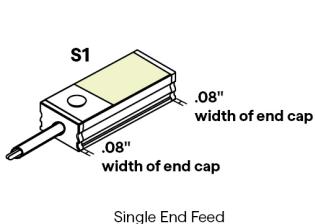

Connection by others
Non-Continuous End Feed

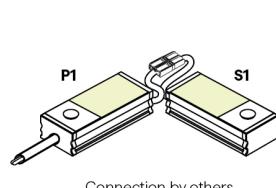

Connection by others
Non-Continuous Corner Feed

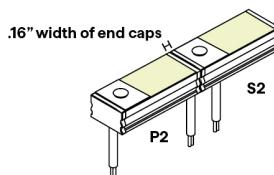

Continuous Bottom Feed

Continuous End to End Feed




ESSENTIALS LALO-FLAT-OCCUPANCY (01) SC


24VDC Linear Fixtures - Surface & Recessed

9 / 10 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

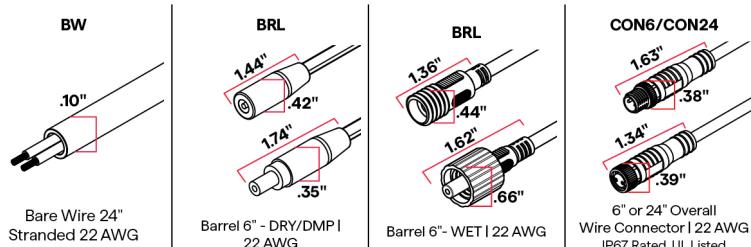

11 WIRE COLOR



13 MOUNTING

SST	M4	MMA-04	MG
1.25" x .81" x .20" (dimensions) Stainless Steel Clip 2 clips provided for 4' or less; 4 clips provided for greater than 4' To order separately use SST-01 Each clip comes with a #4 x 5/8" Flat Head SS	2.25" x .71" x .28" (dimensions) Low Profile Magnet One M4 provided per foot. To order separately use MG-04	.64" x 12" (dimensions) Magnet Mount Accessory for M4 Sold separately, to order use MMA-04 Each bracket comes with 2 #6 x 5/8" Flat Head SS Required when mounting to a non-magnetic surface	1.25" x .81" x .20" (dimensions) Magnet Clip One MG provided per foot To order separately use MG-01

14 FINISH



Custom color available

MMA-01

.64" x 12" (dimensions) Magnet Mount Accessory of MG-01 Sold separately, to order use MMA-01 Each bracket comes with 2 #6 x 5/8" Flat Head SS Required when mounting to a non-magnetic surface
--



ESSENTIALS LALO-FLAT-OCCUPANCY (01) SC

24VDC Linear Fixtures - Surface & Recessed


16 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

Optimal Fixtures

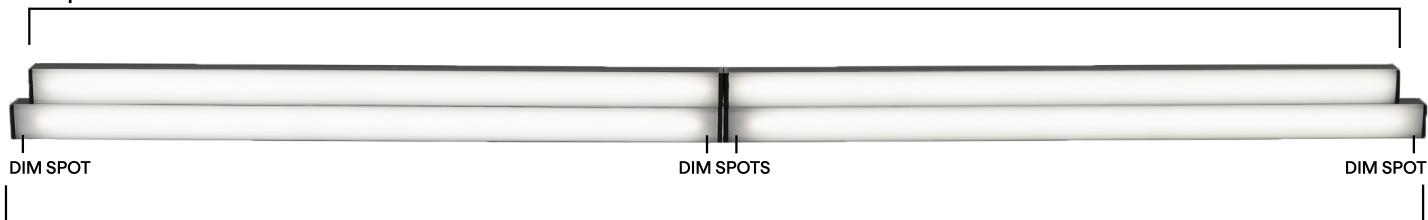

Exact Fixtures

SC DRY LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2		P1 & P2	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed
12"	10.5"	10.75"	10.75"	10.75"
13"	12.5"	12.75"	12.75"	12.75"
14"	12.5"	12.75"	12.75"	12.75"
15"	14.5"	14.75"	14.75"	14.75"
16"	14.5"	14.75"	14.75"	14.75"
17"	16.5"	16.75"	16.75"	16.75"
18"	16.5"	16.75"	16.75"	16.75"
19"	18.5"	18.75"	18.75"	18.75"
20"	18.5"	18.75"	18.75"	18.75"
21"	20.5"	20.75"	20.75"	20.75"
22"	20.5"	20.75"	20.75"	20.75"
23"	22.5"	22.75"	22.75"	22.75"
24"	22.5"	22.75"	22.75"	22.75"
36"	34.5"	34.75"	34.75"	34.75"
48"	46.5"	46.75"	46.75"	46.75"
60"	58.5"	58.75"	58.75"	58.75"
72"	70.5"	70.75"	70.75"	70.75"
84"	82.5"	82.75"	82.75"	82.75"
96"	94.5"	94.75"	94.75"	94.75"

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	INDOOR
	SC
Non-Dim	QTM-eLED-ND QZ-ND



ESSENTIALS LALO-FLAT-OCCUPANCY (01) SC

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M	HINGE - HMB-L	HINGE - HMB-XL	Q-PIVOT	Q-ANGLE	QUOVA-STANDARD	VHB	NJ-MEDIUM	SD-L-MEDIUM
1.41" 0.71"	1.46" 1.29"	1.46" 4"	0.75" 1.03"	1.38" 2.23"	QUOVA Knife Edge	Double sided mounting tape	J Mounting Bracket	L Mounting Bracket

COMPATIBLE WIRING ACCESSORIES

Q-mini-J	Q-mini-J5	BARREL-EXT	BARREL FOUR-FER	CON120-EXT	CON FOUR-FER	CON M - BARREL F
2" 1.25"	2.80" 2.27"	8ft barrel cable extender DRY ONLY	Splits lead from one to four LED Barrel connector fixtures, DRY/DMP	10ft Con cable extender DRY/DMP/WET	Splits lead from one to four LED Con connectors DRY/DMP/WET	Male con to barrel cable adaptor DRY/DMP