



ESSENTIALS LALO-OPTICS (02)



RGB

24VDC Linear Fixtures - Surface & Recessed



5 YEAR
WARRANTY

Declare.

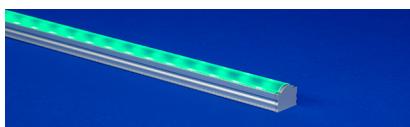

- Shallow, low-profile linear fixture for surface or recessed installations
- Produces a 17° beam angle
- Mounting options include stainless steel clips, magnets, and low-profile magnet mounts
- Features painted end caps to match extrusion finish
- Can be suitable for exterior use when specified as wet, contact factory for more information
- Red, Green, and Blue LED allows for color changing applications
- Features 7 diodes per 2" cut point

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS	7 EXTERNAL LOUVER	8 WIRE INPUT/ OUTPUT	9 CONNECTOR / WIRE IN	10 CONNECTOR / WIRE OUT	11 WIRE COLOR	12 WIRE TYPE	13 MOUNTING	14 FINISH	15 LENGTH (IN)	16 EXACT/ OPTIMAL
LL2RGB	6.0	RGB		STD	17DEG										

Sample Part Number: LL2RGB-6.0-RGB-DRY-STD-17-P1-BW-BW-BK-CL2-SST-BK-48"-E


1 PRODUCT LL2RGB See following pages for compatible power supplies.	2 WATTS/FT 6.0 6.0W/ft	3 CCT RGB	4 RATED DRY IP20 DMP IP54 WET IP67 Can be suitable for exterior use, contact factory for more information	5 EFFICIENCY STD Standard	6 LENS 17DEG Optical 17° For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages	7 EXTERNAL LOUVER L1-WH White Plastic L1-BK Black Plastic N/A No Louver Louvers are shipped separately and require field assembly
8 WIRE INPUT/OUTPUT S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed For continuous mounting, consider bottom feed.	9 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" Connector/Wire In not needed to specify product. Typical selection is BW. BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	10 CONNECTOR/WIRE OUT CLS Closed End (No feed)	11 WIRE COLOR WH White BK Black			
P1 Pass Through 1 (Input/output) - End Feed P2 Pass Through 2 (Input/output) - Bottom Feed For continuous mounting, consider bottom feed.	BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" Connector/Wire In not needed to specify product. Typical selection is BW. BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" Connector/Wire Out not needed to specify product. Typical selection is CLS or BW. BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)				
12 WIRE TYPE CL2 Class 2 CL2P Plenum Rated CL2P only available with bare wire leads (BW)	13 MOUNTING SST Stainless Steel M4 Low Profile Magnet MG Magnet	14 FINISH ST Satin BK Black CU Custom	15 LENGTH (IN) Fixture length min 12", max 98.43" not including end caps. Tolerance +0 - 1/8". Consult factory for lengths under 12".	16 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures are the exact length specified +0 - 1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.		



ESSENTIALS LALO-OPTICS (02) RGB

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS

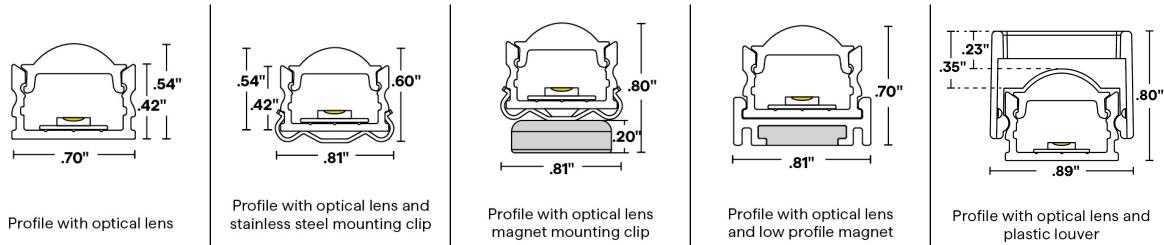

2 DELIVERED LUMENS

[Calculated L70 = 55000 hrs]
Tested with LL2RGB-6.0-RGB-DRY-STD

	Red		Green		Blue		All	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	
17	86	633	174	523	49	469	280	

6 DIODE VISIBILITY




Optical lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

17DEG



Optical 17°

TEMPERATURE RATINGS

	Ambient Operating Temp - Surface	6.0 W/FT	
		Min	Max
DRY	Ambient Operating Temp - Surface	-13°F	105°F
DMP	Ambient Operating Temp - Surface	-13°F	-100°F
WET	Ambient Operating Temp - Surface	-13°F	-100°F




ESSENTIALS LALO-OPTICS (02) RGB


24VDC Linear Fixtures - Surface & Recessed

7 EXTERNAL LOUVER

PLASTIC

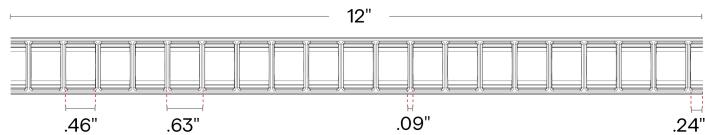


L1-XX




8 WIRE INPUT/OUTPUT






SINGLE (Input only)



PASS THROUGH (Input/Output)



CONFIGURATION OPTIONS



Continuous End to End Feed




ESSENTIALS LALO-OPTICS (02) RGB

24VDC Linear Fixtures - Surface & Recessed

9 / 10 CONNECTOR/WIRE – IN/OUT





Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

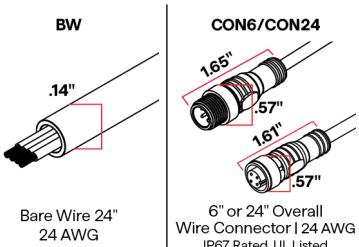


11 WIRE COLOR



13 MOUNTING

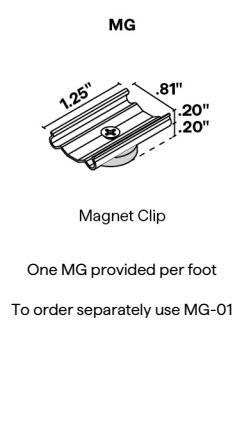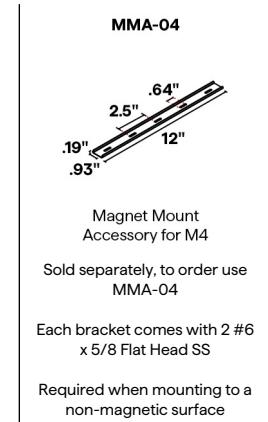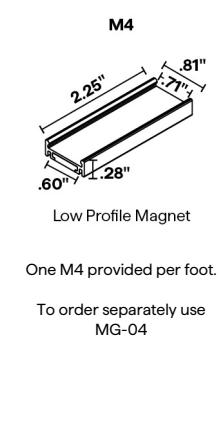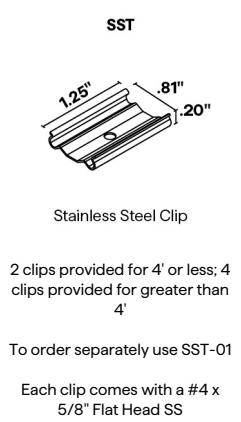

14 FINISH



Custom color available

MMA-01





ESSENTIALS LALO-OPTICS (02) RGB

24VDC Linear Fixtures - Surface & Recessed


16 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

Optimal Fixtures

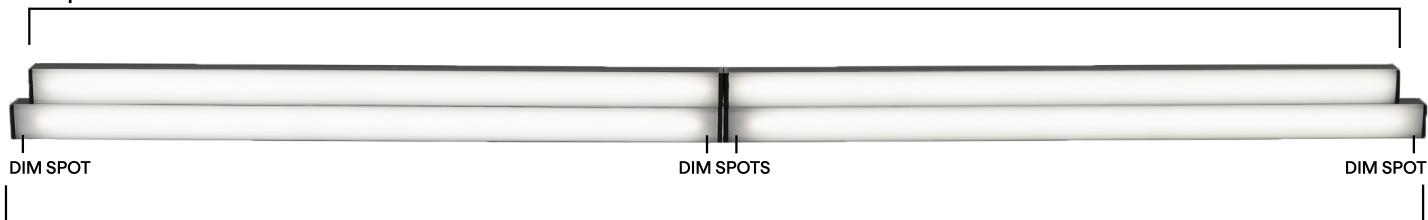

Exact Fixtures

RGB DRY, DMP LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2		P1 & P2	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed
12"			10.66"	
13"	12.41"		12.66"	
14"	12.41"		12.66"	
15"	14.41"		14.66"	
16"	14.41"		14.66"	
17"	16.41"		16.66"	
18"	16.41"		16.66"	
19"	18.41"		18.66"	
20"	18.41"		18.66"	
21"	20.41"		20.66"	
22"	20.41"		20.66"	
23"	22.41"		22.66"	
24"	22.41"		22.66"	
36"	34.41"		34.66"	
48"	46.41"		46.66"	
60"	58.41"		58.66"	
72"	70.41"		70.66"	
84"	82.41"		82.66"	
96"	94.41"		94.66"	



ESSENTIALS LALO-OPTICS (02) RGB

24VDC Linear Fixtures - Surface & Recessed

RGB WET LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is $+0 - 1/8"$. Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2		P1 & P2	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed
12"	10.61"	10.76"		
13"	12.61"	12.76"		
14"	12.61"	12.76"		
15"	14.61"	14.76"		
16"	14.61"	14.76"		
17"	16.61"	16.76"		
18"	16.61"	16.76"		
19"	18.61"	18.76"		
20"	18.61"	18.76"		
21"	20.61"	20.76"		
22"	20.61"	20.76"		
23"	22.61"	22.76"		
24"	22.61"	22.76"		
36"	34.61"	34.76"		
48"	46.61	46.76"		
60"	58.61"	58.76"		
72"	70.61"	70.76"		
84"	82.61"	82.76"		
96"	94.61"	94.76"		

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has $+/- 5\%$ tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	RGB	RGB
0.1%	QT-CAB-eLED+DMX QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DMX QZ-DMX
1%	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QOM-eLED+PS-DALI-DT8
10%	Non-Dim Power Supply with RGB App Dongle	

DIMMING PROTOCOL	INDOOR	OUTDOOR
	RGB	RGB
DMX	QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with RGB App Dongle	



ESSENTIALS LALO-OPTICS (02) RGB

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M  1.41" .71"	HINGE - HMB-L  1.46" 1.29"	HINGE - HMB-XL  1.46" 4"	Q-PIVOT  .75" 1.03"	Q-ANGLE  1.38" 2.23"	VHB 	NU-GRAZER 	NJ-GRAZER 	BL-GRAZER 
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory	Double sided mounting tape	U Mounting Bracket	J Mounting Bracket	Backwards L Mounting Bracket

COMPATIBLE WIRING ACCESSORIES

Q-mini-J5  2.27" 2.80"	CON120-EXT 
UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	10ft Con cable extender DRY/DMP/WET

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE  1.36" 2.58"	IQ-DMX-STICK-QA2 	IQ-DMX-STICK-DE3 
Wi-Fi or Bluetooth Connectivity	DMX controller for changing color & dimming	DMX controller for changing color & dimming