



ESSENTIALS TORQ-FLAT (01)

STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed



white
optics



5 YEAR
WARRANTY



Declare.

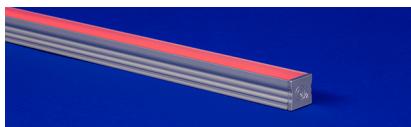

- Surface mount linear fixture
- Choose from diffused, polar, frosted, clear 60°, or clear 70° lens options for varying diode visibility and beam angles
- Offered with an optional mounting tray
- Features all wire feed options
- Mounting options include stainless steel clips, magnets, and low-profile magnet mounts
- Features painted end caps to match extrusion finish
- Suitable for exterior use when specified as wet
- Red, Green, Blue or Amber LEDs available
- Q-Tran Red & Amber LED products are Florida Fish and Wildlife Conservation Commission certified, making them safe for turtles and other wildlife

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS	7 EXTERNAL LOUVER	8 WIRE INPUT/ OUTPUT	9 CONNECTOR / WIRE IN	10 CONNECTOR / WIRE OUT	11 WIRE COLOR	12 WIRE TYPE	13 MOUNTING	14 FINISH	15 LENGTH (IN)	16 EXACT/ OPTIMAL
TQ1SC	5.0														

Sample Part Number: TQ1SC-5.0-GR-DRY-WO-DF-P1-BW-BW-BK-CL2-SST-BK-48"-E

1 PRODUCT TQ1SC See following pages for compatible power supplies.	2 WATTS/FT 5.0 5.0W/ft	3 CCT A Amber B Blue G Green R Red	4 RATED DRY IP20 DMP IP54 WET IP67 Can be suitable for exterior use, contact factory for more information	5 EFFICIENCY STD Standard WO White Optics WhiteOptics - Internal coating, greater lumen output	6 LENS DF Diffused PR Polar FR Frosted CL/60 Clear 60° CL/70 Clear 70° For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages	7 EXTERNAL LOUVER L1-WH White Plastic L1-BK Black Plastic N/A No Louver Louvers are shipped separately and require field assembly		
8 WIRE INPUT/OUTPUT S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed S3 Single 3 (Input only) - Left Side Feed S4 Single 4 (Input only) - Right Side Feed For continuous mounting, consider bottom or side feed	9 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24" Connector/Wire In not needed to specify product. Typical selection is BW. BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	10 CONNECTOR/WIRE OUT CLS Closed End (No feed)	11 WIRE COLOR WH White BK Black N/A For Barrel wet barrel only available in black					
P1 Pass Through 1 (Input/output) - End Feed P2 Pass Through 2 (Input/output) - Bottom Feed P3 Pass Through 3 (Input/output) - Left Side Feed P4 Pass Through 4 (Input/output) - Right Side Feed For continuous mounting, consider bottom or side feed	P1 Pass Through 1 (Input/output) - End Feed P2 Pass Through 2 (Input/output) - Bottom Feed P3 Pass Through 3 (Input/output) - Left Side Feed P4 Pass Through 4 (Input/output) - Right Side Feed For continuous mounting, consider bottom or side feed	P1 Pass Through 1 (Input/output) - End Feed P2 Pass Through 2 (Input/output) - Bottom Feed P3 Pass Through 3 (Input/output) - Left Side Feed P4 Pass Through 4 (Input/output) - Right Side Feed For continuous mounting, consider bottom or side feed	P1 Pass Through 1 (Input/output) - End Feed P2 Pass Through 2 (Input/output) - Bottom Feed P3 Pass Through 3 (Input/output) - Left Side Feed P4 Pass Through 4 (Input/output) - Right Side Feed For continuous mounting, consider bottom or side feed	12 WIRE TYPE CL2 Class 2 CL2P Plenum Rated N/A For Barrel CL2P only available with bare wire leads (BW)	13 MOUNTING SST Stainless Steel M4 Low Profile Magnet MG Magnet	14 FINISH ST Satin BK Black BZ Bronze CU Custom	15 LENGTH (IN) Fixture length min 12", max 98.43" not including end caps. Consult factory for lengths under 12"	16 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures are the exact length specified +0 - 1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance | FWC rated Strips: DRY and WET rated, Red and Amber



ESSENTIALS TORQ-FLAT (01) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS

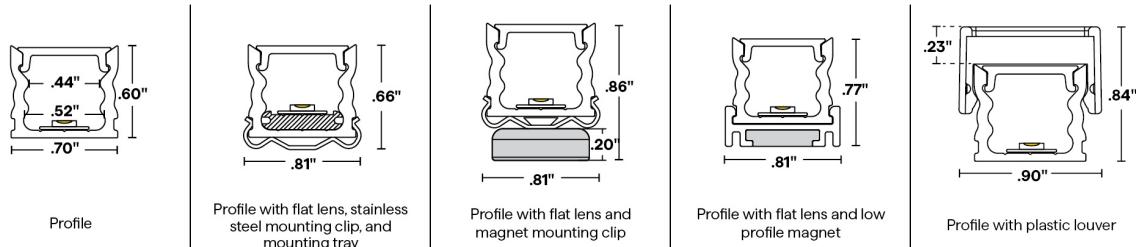

2 DELIVERED LUMENS

[Calculated L70 = 30000 hrs]
Tested with TQ1SC-5.0-**-DRY-STD

	Red		Green		Blue		Amber	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH
60	73	633	396	517	103	466	66	597
70	74	633	401	517	104	466	67	597
FR	72	633	388	517	101	466	65	597
PR	64	633	349	517	91	466	58	597
DF	58	633	315	517	82	466	53	597

[Calculated L70 = 30000 hrs]
Tested with TQ1SC-5.0-**-DRY-WO

	Red		Green		Blue		Amber	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH
60	80	633	435	517	113	466	73	597
70	84	633	453	517	118	466	76	597
FR	79	633	426	517	111	466	71	597
PR	71	633	385	517	100	466	64	597
DF	63	633	342	517	89	466	57	597


6 DIODE VISIBILITY



DF - Diffused lens
PR - Polar lens
FR - Frosted lens
CL - Clear lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

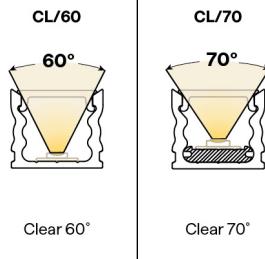



ESSENTIALS TORQ-FLAT (01) STATIC COLOR


24VDC Linear Fixtures - Surface & Recessed

TEMPERATURE RATINGS


	5.0 W/FT	
	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F 125°F
DMP	Ambient Operating Temp - Surface	-4°F 120°F
WET	Ambient Operating Temp - Surface	-4°F 120°F

7 EXTERNAL LOUVER

PLASTIC

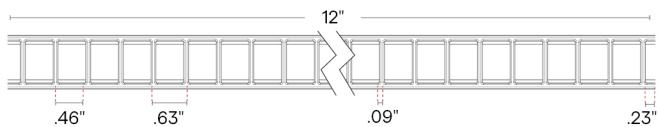


L1-XX




Lumen Multiplier
WH BK
0.72 0.53

8 WIRE INPUT/OUTPUT

SINGLE (Input only)

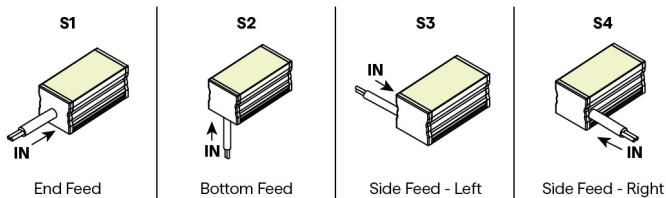

PASS THROUGH (Input/Output)

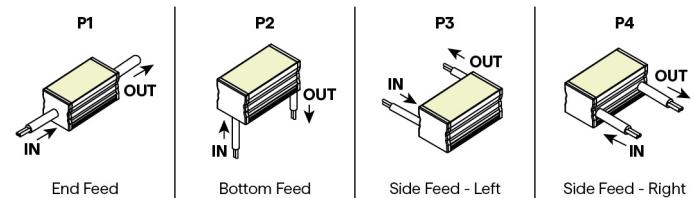




ESSENTIALS TORQ-FLAT (01) STATIC COLOR


24VDC Linear Fixtures - Surface & Recessed

CONFIGURATION OPTIONS

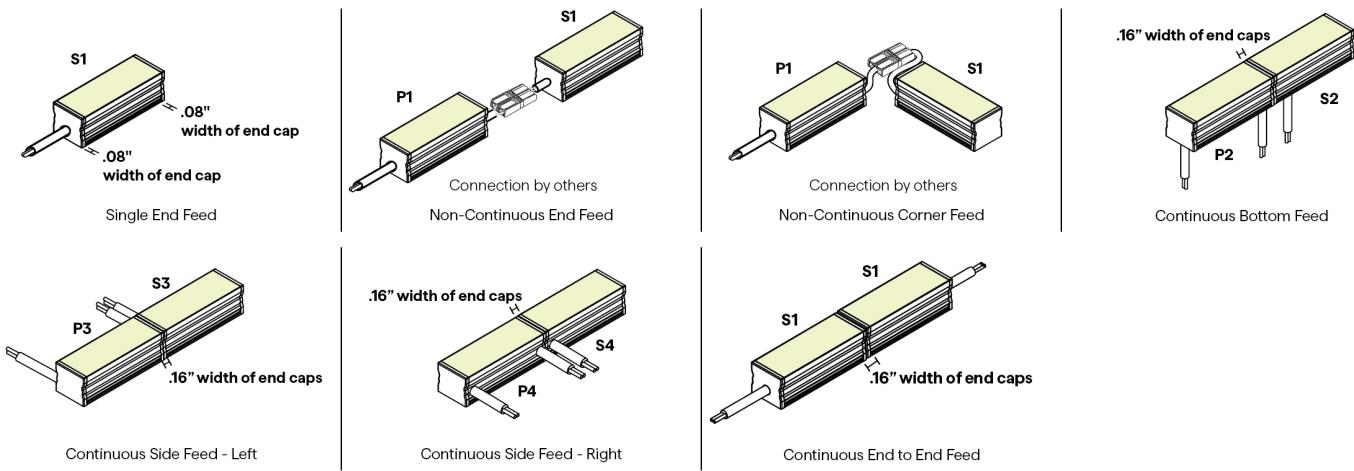

9 / 10 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

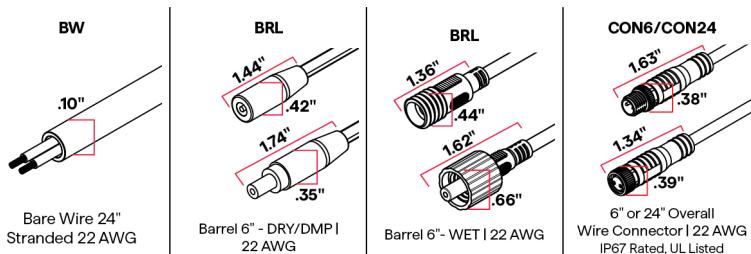

11 WIRE COLOR






ESSENTIALS TORQ-FLAT (01) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

13 MOUNTING




Stainless Steel Clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use SST-01


Each clip comes with a #4 x 5/8" Flat Head SS



Low Profile Magnet

One M4 provided per foot.

To order separately use MG-04




Magnet Mount Accessory for M4

Sold separately, to order use MMA-04

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface



Magnet Clip

One MG provided per foot

To order separately use MG-01




Satin

Black

Bronze

Custom color available

MMA-01



Magnet Mount Accessory of MG-01

Sold separately, to order use MMA-01


Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface

16 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

Optimal Fixtures

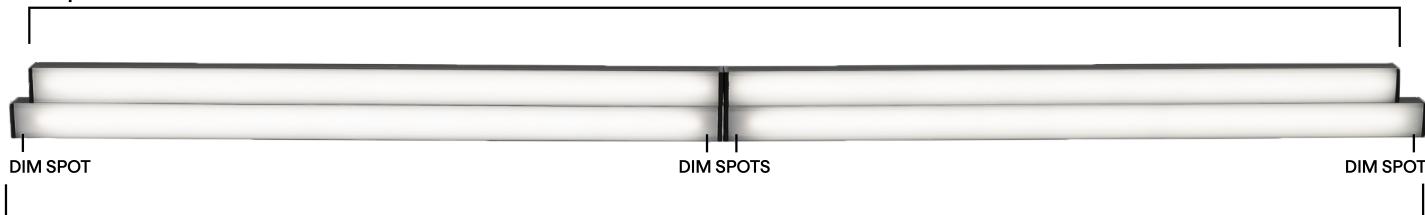

Exact Fixtures



ESSENTIALS TORQ-FLAT (01) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

SC DRY, DMP LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is $\pm 0 - 1/8"$. Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed	S3 Side Feed - Left	S4 Side Feed - Right	P3 Side Feed - Left	P4 Side Feed - Right
12"	10.41"		10.66"		10.26"		10.36"	
13"	12.41"		12.66"		12.26"		12.36"	
14"	12.41"		12.66"		12.26"		12.36"	
15"	14.41"		14.66"		14.26"		14.36"	
16"	14.41"		14.66"		14.26"		14.36"	
17"	16.41"		16.66"		16.26"		16.36"	
18"	16.41"		16.66"		16.26"		16.36"	
19"	18.41"		18.66"		18.26"		18.36"	
20"	18.41"		18.66"		18.26"		18.36"	
21"	20.41"		20.66"		20.26"		20.36"	
22"	20.41"		20.66"		20.26"		20.36"	
23"	22.41"		22.66"		22.26"		22.36"	
24"	22.41"		22.66"		22.26"		22.36"	
36"	34.41"		34.66"		34.26"		34.36"	
48"	46.41"		46.66"		46.26"		46.36"	
60"	58.41"		58.66"		58.26"		58.36"	
72"	70.41"		70.66"		70.26"		70.36"	
84"	82.41"		82.66"		82.26"		82.36"	
96"	94.41"		94.66"		94.26"		94.36"	

SC WET LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is $\pm 0 - 1/8"$. Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed	S3 Side Feed - Left	S4 Side Feed - Right	P3 Side Feed - Left	P4 Side Feed - Right
12"	10.61"		10.76"		10.51"		10.61"	
13"	12.61"		12.76"		12.51"		12.61"	
14"	12.61"		12.76"		12.51"		12.61"	
15"	14.61"		14.76"		14.51"		14.61"	
16"	14.61"		14.76"		14.51"		14.61"	
17"	16.61"		16.76"		16.51"		16.61"	
18"	16.61"		16.76"		16.51"		16.61"	
19"	18.61"		18.76"		18.51"		18.61"	
20"	18.61"		18.76"		18.51"		18.61"	
21"	20.61"		20.76"		20.51"		20.61"	
22"	20.61"		20.76"		20.51"		20.61"	
23"	22.61"		22.76"		22.51"		22.61"	
24"	22.61"		22.76"		22.51"		22.61"	
36"	34.61"		34.76"		34.51"		34.61"	
48"	46.61		46.76"		46.51"		46.61"	
60"	58.61"		58.76"		58.51"		58.61"	
72"	70.61"		70.76"		70.51"		70.61"	
84"	82.61"		82.76"		82.51"		82.61"	
96"	94.61"		94.76"		94.51"		94.61"	



ESSENTIALS TORQ-FLAT (01) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	SC	SC
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-DMX QZ-PH/0-10V
1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED(E) QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	




ESSENTIALS TORQ-FLAT (01) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR	OUTDOOR
	SC	SC
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND iQ-ND-50-65
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	
ECO System	QTM-eLED(E)	
DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	

COMPATIBLE MOUNTING ACCESSORIES

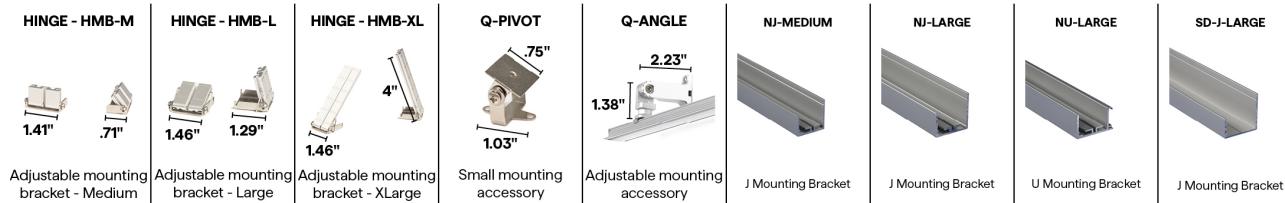

COMPATIBLE WIRING ACCESSORIES

