




ESSENTIALS TORQ-OPTICS (02) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS

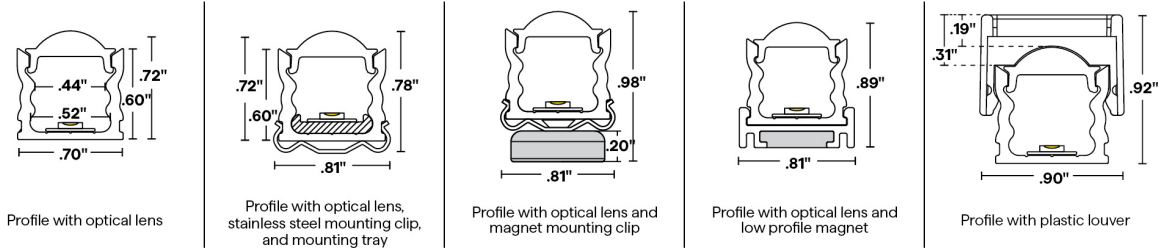

2 DELIVERED LUMENS

[Calculated L70 = 30000 hrs]
Tested with TQ2SC-5.0-**-DRY-STD

	Red		Green		Blue		Amber	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH
12	75	633	405	517	105	466	68	597
40	94	633	508	517	132	466	85	597

[Calculated L70 = 30000 hrs]
Tested with TQ2SC-5.0-**-DRY-WO

	Red		Green		Blue		Amber	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH
12	78	633	422	517	110	466	71	597
40	98	633	529	517	137	466	88	597


6 DIODE VISIBILITY



Optical lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



TEMPERATURE RATINGS

		5.0 W/FT	
		Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	125°F
DMP	Ambient Operating Temp - Surface	-4°F	120°F
WET	Ambient Operating Temp - Surface	-4°F	120°F




ESSENTIALS TORQ-OPTICS (02) STATIC COLOR


24VDC Linear Fixtures - Surface & Recessed

7 EXTERNAL LOUVER

PLASTIC

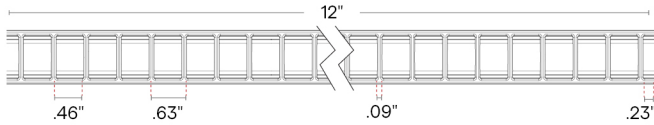

L1-XX




Lumen Multiplier


WH	BK
0.72	0.53

8 WIRE INPUT/OUTPUT


SINGLE (Input only)

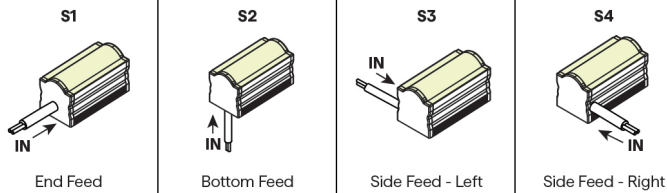

PASS THROUGH (Input/Output)

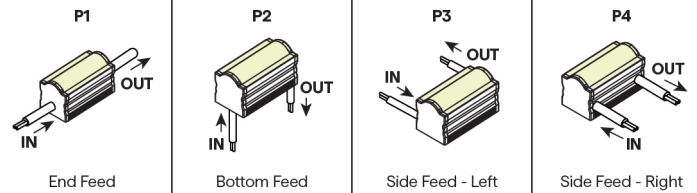

CONFIGURATION OPTIONS

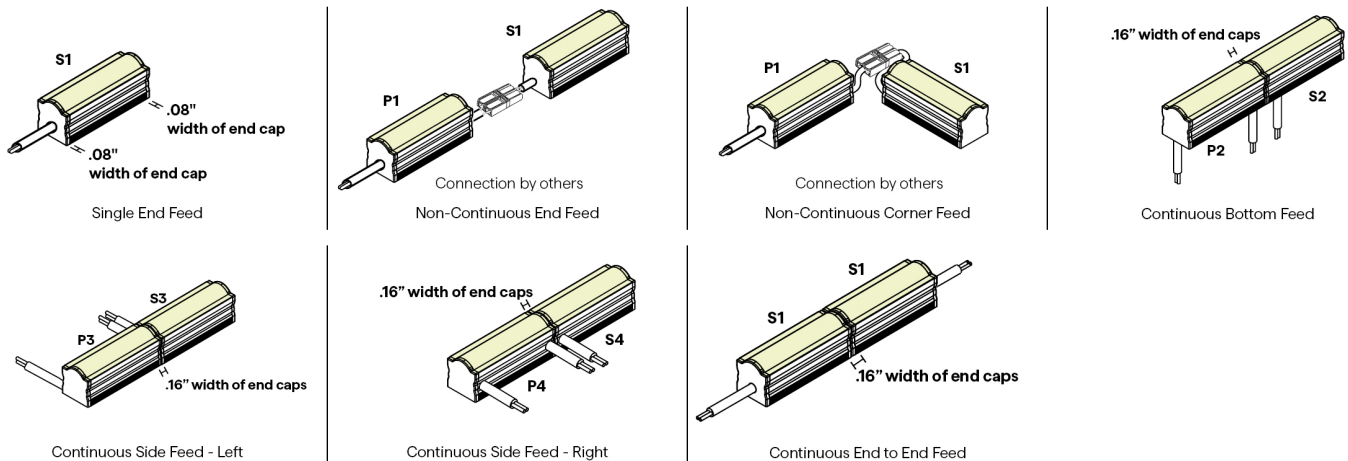




ESSENTIALS TORQ-OPTICS (02) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

9 / 10 CONNECTOR/WIRE - IN/OUT


Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

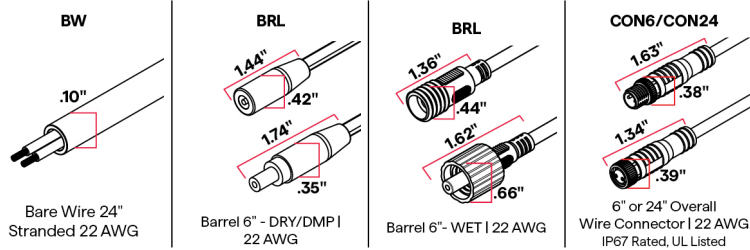


11 WIRE COLOR



13 MOUNTING

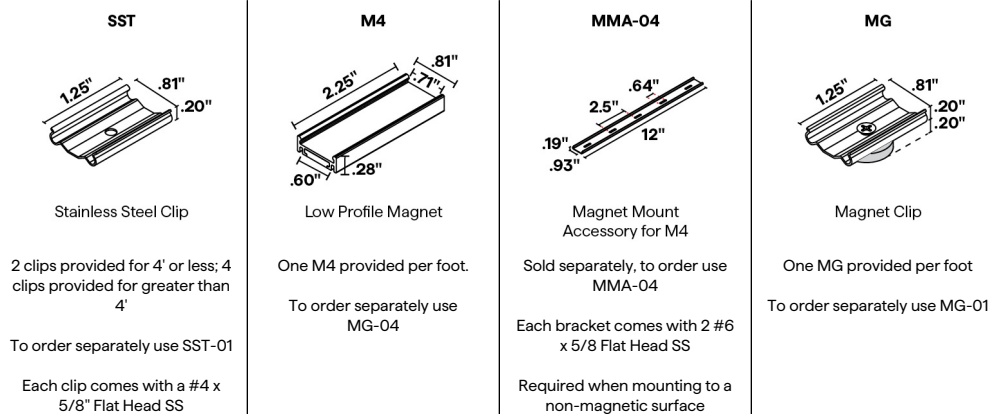


14 FINISH



Custom color available

MMA-01



Magnet Mount
Accessory of MG-01

Sold separately, to order use MMA-01

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface




ESSENTIALS TORQ-OPTICS (02) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

16 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

Optimal Fixtures

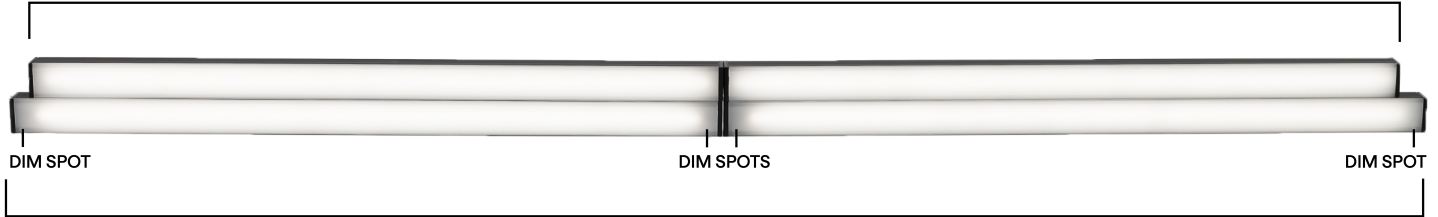

Exact Fixtures

SC DRY, DMP LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1 End Feed IN	S2 Bottom Feed IN	P1 End Feed IN	P2 Bottom Feed IN	S3 Side Feed - Left IN	S4 Side Feed - Right IN	P3 Side Feed - Left IN	P4 Side Feed - Right IN
12"								
13"								
14"								
15"								
16"								
17"								
18"								
19"								
20"								
21"								
22"								
23"								
24"								
36"								
48"								
60"								
72"								
84"								
96"								



ESSENTIALS TORQ-OPTICS (02) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed









SC WET LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1 	S2 	P1 	P2 	S3 	S4 	P3 	P4 
12"		10.61"		10.76"		10.51"		10.61"
13"		12.61"		12.76"		12.51"		12.61"
14"		12.61"		12.76"		12.51"		12.61"
15"		14.61"		14.76"		14.51"		14.61"
16"		14.61"		14.76"		14.51"		14.61"
17"		16.61"		16.76"		16.51"		16.61"
18"		16.61"		16.76"		16.51"		16.61"
19"		18.61"		18.76"		18.51"		18.61"
20"		18.61"		18.76"		18.51"		18.61"
21"		20.61"		20.76"		20.51"		20.61"
22"		20.61"		20.76"		20.51"		20.61"
23"		22.61"		22.76"		22.51"		22.61"
24"		22.61"		22.76"		22.51"		22.61"
36"		34.61"		34.76"		34.51"		34.61"
48"		46.61"		46.76"		46.51"		46.61"
60"		58.61"		58.76"		58.51"		58.61"
72"		70.61"		70.76"		70.51"		70.61"
84"		82.61"		82.76"		82.51"		82.61"
96"		94.61"		94.76"		94.51"		94.61"

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	SC	SC
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-DMX QZ-PH/0-10V
1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED(E) QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	



ESSENTIALS TORQ-OPTICS (02) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR	OUTDOOR
	SC	SC
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND iQ-ND-50-65
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	
ECO System	QTM-eLED(E)	
DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M

1.41" .71"

Adjustable mounting bracket - Medium

HINGE - HMB-L

1.46" 1.29"

Adjustable mounting bracket - Large

HINGE - HMB-XL

1.46" 4"

Adjustable mounting bracket - XLarge

Q-PIVOT

.75" 1.03"

Small mounting accessory

Q-ANGLE

2.23" 1.38"

Adjustable mounting accessory

NU-GRAZER

U Mounting Bracket

NJ-GRAZER

J Mounting Bracket

BL-GRAZER

Backwards L Mounting Bracket

NJ-MEDIUM

J Mounting Bracket

COMPATIBLE WIRING ACCESSORIES

Q-mini-J

2" 1.25"

UL Listed miniature junction box, DRY/DMP (WET rated with silicone)

Q-mini-J5

2.80" 2.27"

UL Listed miniature junction box, DRY/DMP (WET rated with silicone)

BARREL-EXT

8ft barrel cable extender DRY ONLY

BARREL FOUR-FER

Splits lead from one to four LED Barrel connector fixtures, DRY/DMP

CON120-EXT

10ft Con cable extender DRY/DMP/WET

CON FOUR-FER

Splits lead from one to four LED Con connectors DRY/DMP/WET

CON M - BARREL F

Male con to barrel cable adaptor DRY/DMP