





ESSENTIALS EMBD-FLAT (01) MITERED STATIC WHITE

24VDC Partially Assembled Recessed
Fixtures - Recessed



- Recessable fixture offered in a sleek flat profile with four lens options
- Outer trim sits flush to the surface and recesses at either 0.77" or 1.27" depending on mounting selected
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
PRODUCT	WATTS/ FT	CCT	RATED	EFFICIENCY	LENS	WIRE INPUT/ OUTPUT	CONNECTOR / WIRE IN	CONNECTOR / WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LEFT END ANGLE	RIGHT END ANGLE	LENGTH (IN)	EXACT/ OPTIMAL
EBM1SW				STD												

Sample Part Number: **EBM1SW-5.0-30-DRY-DF-**-BW-BW-BK-CL2-SP-ST-LI45-RI45-48"-E**

1 PRODUCT EBM1SW See following pages for compatible power supplies.	2 WATTS/FT 1.51.5W/ft 3.03.0W/ft 4.04.0W/ft 5.05.0W/ft 1.51.5W/ft 3.03.0W/ft 4.04.0W/ft 5.05.0W/ft	3 CCT 202000K 222200K 242400K 272700K 303000K 353500K 404000K 242400K 272700K 303000K 353500K 404000K	4 RATED DRYIP20 WETIP67 DMP IP54	5 EFFICIENCY STD Standard
6 LENS DFDiffused PRPolar FRFrosted For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages	7 WIRE INPUT/OUTPUT **Shop drawings required **Shop drawings required	8 CONNECTOR/WIRE IN BWBare Wire (Standard 24") BRLBarrel CON6Connector 6" CON24Connector 24" Connector/Wire In not needed to specify product. Typical selection is BW. BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48) BWBare Wire (Standard 24") BRLBarrel CON6Connector 6" CON24Connector 24" Connector/Wire In not needed to specify product. Typical selection is BW. BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	9 CONNECTOR/WIRE OUT CLS Closed End (No feed) BWBare Wire (Standard 24") BRLBarrel CON6Connector 6" CON24Connector 24" Connector/Wire Out not needed to specify product. Typical selection is CLS or BW. BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	
10 WIRE COLOR WHWhite BKBlack N/AFor Barrel wet barrel only available in black	11 WIRE TYPE CL2Class 2 CL2PPlenum Rated N/AFor Barrel CL2P only available with bare wire leads (BW)	12 MOUNTING MG Magnet SP Spring Clip	13 FINISH ST Satin CU Custom	
14 LEFT END ANGLE LI45Inner 45° LO45Outer 45° LFTFlat (no angle) See following pages for mitered angle configuration options	15 RIGHT END ANGLE LI45Inner 45° LO45Outer 45° LFTFlat (no angle) See following pages for mitered angle configuration options	16 LENGTH (IN) Fixture length min 12", max 98.43" not including end caps. Tolerance +0 – 1/8". Consult factory for lengths under 12".	17 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures are the exact length specified +0 – 1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.	


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




ESSENTIALS EMBD-FLAT (01) MITERED STATIC WHITE

24VDC Partially Assembled Recessed Fixtures - Recessed


1 PRODUCT - DIMENSIONS




Profile with flat lens



Profile with flat lens and magnet mounting clip



Profile with flat lens and spring mounting clip



Spring mounting clip

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with EBM1SW-**-30-DRY-STD

	1.5 W/FT		3.0 W/FT		4.0 W/FT		5.0 W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
FR	124	98	216	98	269	98	327	98
PR	107	98	186	98	231	98	281	98
DF	91	98	159	98	198	98	241	98

6 DIODE VISIBILITY



DF - Diffused lens

PR - Polar lens

FR - Frosted lens

TEMPERATURE RATINGS





		1.5 W/FT		3.0 W/FT		4.0 W/FT		5.0 W/FT	
		Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Recessed	-4°F	135°F	-4°F	130°F	-4°F	120°F	-4°F	110°F
DMP	Ambient Operating Temp - Recessed	-4°F	130°F	-4°F	125°F	-4°F	115°F	-4°F	105°F
WET	Ambient Operating Temp - Recessed	-4°F	130°F	-4°F	125°F	-4°F	115°F	-4°F	105°F



ESSENTIALS EMBD-FLAT (01) MITERED STATIC WHITE





24VDC Partially Assembled Recessed Fixtures - Recessed

WIRING CONFIGURATION OPTIONS

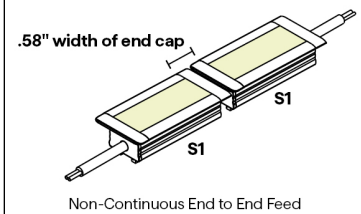


8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out



10 WIRE COLOR



12 MOUNTING




One MG provided per foot
To order separately use MG-02



2 clips provided for 4' or less. 4 clips provided for greater than 4'.

To order separately use SP-01



Sold separately, to order use MMA-02




Each bracket comes with 2 #6 x 5/8 inch Flat Head SS

Required when mounting to a non-magnetic surface

13 FINISH



14 / 15 LEFT/RIGHT END ANGLE CONFIGURATION OPTIONS






ESSENTIALS EMBD-FLAT (01) MITERED STATIC WHITE

24VDC Partially Assembled Recessed Fixtures - Recessed

17 EXACT/OPTIMAL FIXTURE LENGTH

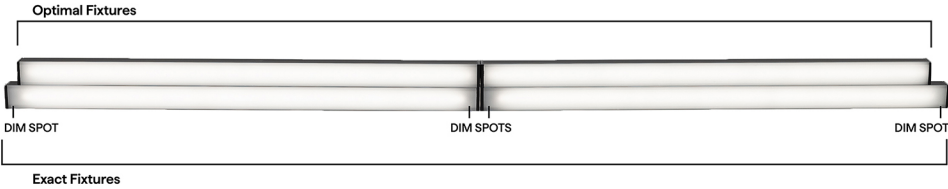

SW DRY, DMP LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12'.

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	.5"
13"	.5"
14"	.5"
15"	.5"
16"	.5"
17"	.5"
18"	.5"
19"	.5"
20"	.5"
21"	.5"
22"	.5"
23"	.5"
24"	.5"
36"	.5"
48"	.5"
60"	.5"
72"	.5"
84"	.5"
96"	.5"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1	S2	P1	P2
12"		11.41"		11.66"
13"		12.41"		12.66"
14"		13.41"		13.66"
15"		14.41"		14.66"
16"		15.41"		15.66"
17"		16.41"		16.66"
18"		17.41"		17.66"
19"		18.41"		18.66"
20"		19.41"		19.66"
21"		20.41"		20.66"
22"		21.41"		21.66"
23"		22.41"		22.66"
24"		23.41"		23.66"
36"		35.41"		35.66"
48"		47.41"		47.66"
60"		59.41"		59.66"
72"		71.41"		71.66"
84"		83.41"		83.66"
96"		95.41"		95.66"



ESSENTIALS EMBD-FLAT (01) MITERED STATIC WHITE

24VDC Partially Assembled Recessed Fixtures - Recessed

SW WET LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	.5"
13"	.5"
14"	.5"
15"	.5"
16"	.5"
17"	.5"
18"	.5"
19"	.5"
20"	.5"
21"	.5"
22"	.5"
23"	.5"
24"	.5"
36"	.5"
48"	.5"
60"	.5"
72"	.5"
84"	.5"
96"	.5"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1 End Feed IN	S2 Bottom Feed IN	P1 End Feed IN	P2 Bottom Feed IN
12"				
13"				
14"				
15"				
16"				
17"				
18"				
19"				
20"				
21"				
22"				
23"				
24"				
36"				
48"				
60"				
72"				
84"				
96"				

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1	Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1	QOM-DC+CAP QOM-PH	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED	



ESSENTIALS EMBD-FLAT (01) MITERED STATIC WHITE

24VDC Partially Assembled Recessed Fixtures - Recessed

DIMMING PROTOCOL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN		
ECO System	QTM-eLED(E)	QTM-eLED(E)		
DMX	QZ-DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle		

COMPATIBLE WIRING ACCESSORIES

Q-mini-J 2" 1.25" UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	BARREL-EXT 8ft barrel cable extender DRY ONLY	BARREL FOUR-FER Splits lead from one to four LED Barrel connector fixtures, DRY/DMP	CON120-EXT 10ft Con cable extender DRY/DMP/WET	CON FOUR-FER Splits lead from one to four LED Con connectors DRY/DMP/WET	CON M - BARREL F Male con to barrel cable adaptor DRY/DMP
--	---	---	--	--	---

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE 1.36" 2.58" Wi-Fi or Bluetooth Connectivity
--



ESSENTIALS EMBD-FLAT (01) MITERED STATIC WHITE

24VDC Partially Assembled Recessed Fixtures - Recessed

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage

PRELIMINARY
SUBJECT TO CHANGE