




# ESSENTIALS ARKA-FLAT (01)

## STATIC WHITE

24VDC Linear Fixtures - Corner & Surface



410.2 & 410.16  
Closet Rated  
up to 4.0W/ft



- Corner and surface mount linear fixture with rounded lens
- Choose from diffused, polar, frosted, or clear lens options for varying diode visibility and beam angles
- Mounting options include stainless steel or plastic clip
- Features painted end caps to match extrusion finish
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations
- Can be suitable for exterior use when specified as wet, contact factory for more information

| 1<br>PRODUCT | 2<br>WATTS/ FT | 3<br>CCT | 4<br>RATED | 5<br>EFFICIENCY | 6<br>LENS | 7<br>WIRE INPUT/ OUTPUT | 8<br>CONNECTOR/ WIRE IN | 9<br>CONNECTOR/ WIRE OUT | 10<br>WIRE COLOR | 11<br>WIRE TYPE | 12<br>MOUNTING | 13<br>FINISH | 14<br>LENGTH (IN) | 15<br>EXACT/ OPTIMAL |
|--------------|----------------|----------|------------|-----------------|-----------|-------------------------|-------------------------|--------------------------|------------------|-----------------|----------------|--------------|-------------------|----------------------|
|              |                |          |            |                 |           |                         |                         |                          |                  |                 |                |              |                   |                      |

Sample Part Number: AK1SW-5.0-30-DRY-STD-DF-P1-BW-BW-BK-CL2-SST-BK-48"-E


|   |  |  |   |   |  |
|---|--|--|---|---|--|
| <b>1</b><br><b>PRODUCT</b><br><br>AK1SW<br>AK1SW-USA<br><br>Select USA option for BAA and BABA projects. Only DRY or WET ratings apply.<br><br>See following pages for compatible power supplies. | <b>2</b><br><b>WATTS/FT</b><br><br>1.5 1.5W/ft<br>3.0 3.0W/ft<br>4.0 4.0W/ft<br>5.0 5.0W/ft<br><br>1.5 1.5W/ft<br>3.0 3.0W/ft<br>4.0 4.0W/ft<br>5.0 5.0W/ft  | <b>3</b><br><b>CCT</b><br><br>20 2000K<br>22 2200K<br>24 2400K<br>27 2700K<br>30 3000K<br>35 3500K<br>40 4000K<br><br>24 2400K<br>27 2700K<br>30 3000K<br>35 3500K<br>40 4000K | <b>4</b><br><b>RATED</b><br><br>DRY IP20<br>WET IP67<br><br>Can be suitable for exterior use, contact factory for more information            | <b>5</b><br><b>EFFICIENCY</b><br><br>STD Standard<br>WO White Optics<br><br>WhiteOptics - Internal coating, greater lumen output  | <b>6</b><br><b>LENS</b><br><br>DF Diffused<br>PR Polar<br>FR Frosted<br>CL Clear<br><br>For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages |
| <b>7</b><br><b>WIRE INPUT/OUTPUT</b><br><br>S1 Single 1 (Input only) - End Feed   | <b>8</b><br><b>CONNECTOR/WIRE IN</b><br><br>BW Bare Wire (Standard 24")<br>BRL Barrel<br>CON6 Connector 6"<br>CON24 Connector 24"<br><br>BW Bare Wire (Standard 24")<br>BRL Barrel<br>CON6 Connector 6"<br>CON24 Connector 24" | <b>9</b><br><b>CONNECTOR/WIRE OUT</b><br><br>CLS Closed End (No feed)  | <b>10</b><br><b>WIRE COLOR</b><br><br>WH White<br>BK Black<br>N/A For Barrel<br><br>wet barrel only available in black                        |   |  |
|   |  |  |   |   |  |
| <b>11</b><br><b>WIRE TYPE</b><br><br>CL2 Class 2<br>CL2P Plenum Rated<br>N/A For Barrel<br><br>CL2P only available with bare wire leads (BW)  | <b>12</b><br><b>MOUNTING</b><br><br>SST Stainless Steel<br>PL Plastic Clip   | <b>13</b><br><b>FINISH</b><br><br>ST Satin<br>BK Black<br>BZ Bronze<br>CU Custom<br><br>Custom finishes require a longer lead time, consult factory                            | <b>14</b><br><b>LENGTH (IN)</b><br><br>Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12". | <b>15</b><br><b>EXACT/OPTIMAL</b><br><br>O Optimal Illumination<br>E Exact Specified Length<br><br>Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts. |  |
|   |  |  |   |   |  |



# ESSENTIALS ARKA-FLAT (01) STATIC WHITE

## 24VDC Linear Fixtures - Corner & Surface

## 1 PRODUCT - DIMENSIONS

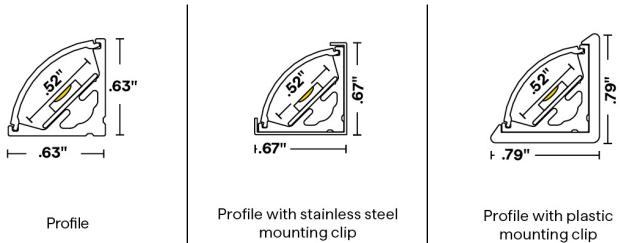

## 2 DELIVERED LUMENS


[Calculated L70 = 70000 hrs]  
Tested with AK1SW-\*\*-30-DRY-STD

|    | 1.5 W/FT |     | 3.0 W/FT |     | 4.0 W/FT |     | 5.0 W/FT |     |
|----|----------|-----|----------|-----|----------|-----|----------|-----|
|    | LM/FT    | CRI | LM/FT    | CRI | LM/FT    | CRI | LM/FT    | CRI |
| CL | 163      | 98  | 284      | 98  | 353      | 98  | 431      | 98  |
| FR | 161      | 98  | 280      | 98  | 348      | 98  | 426      | 98  |
| PR | 147      | 98  | 257      | 98  | 320      | 98  | 391      | 98  |
| DF | 136      | 98  | 238      | 98  | 295      | 98  | 361      | 98  |

[Calculated L70 = 70000 hrs]  
Tested with AK1SW-\*\*-30-DRY-WO

|    | 1.5 W/FT |     | 3.0 W/FT |     | 4.0 W/FT |     | 5.0 W/FT |     |
|----|----------|-----|----------|-----|----------|-----|----------|-----|
|    | LM/FT    | CRI | LM/FT    | CRI | LM/FT    | CRI | LM/FT    | CRI |
| CL | 166      | 98  | 289      | 98  | 359      | 98  | 437      | 98  |
| FR | 163      | 98  | 284      | 98  | 353      | 98  | 429      | 98  |
| PR | 156      | 98  | 272      | 98  | 338      | 98  | 411      | 98  |
| DF | 147      | 98  | 257      | 98  | 319      | 98  | 388      | 98  |

## 6 DIODE VISIBILITY

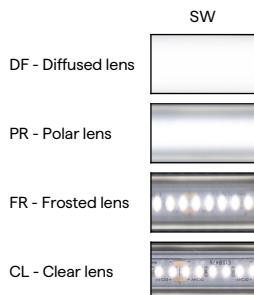




# ESSENTIALS ARKA-FLAT (01) STATIC WHITE

## 24VDC Linear Fixtures - Corner & Surface

### PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.




Clear 130°

### TEMPERATURE RATINGS

|     |                                  | 1.5 W/FT |       | 3.0 W/FT |       | 4.0 W/FT |       | 5.0 W/FT |       |
|-----|----------------------------------|----------|-------|----------|-------|----------|-------|----------|-------|
|     |                                  | Min      | Max   | Min      | Max   | Min      | Max   | Min      | Max   |
| DRY | Ambient Operating Temp - Surface | -4°F     | 140°F | -4°F     | 135°F | -4°F     | 130°F | -4°F     | 125°F |
| DMP | Ambient Operating Temp - Surface | -4°F     | 135°F | -4°F     | 130°F | -4°F     | 125°F | -4°F     | 120°F |
| WET | Ambient Operating Temp - Surface | -4°F     | 135°F | -4°F     | 130°F | -4°F     | 125°F | -4°F     | 120°F |


### 7 WIRE INPUT/OUTPUT

SINGLE (Input only)




End Feed

PASS THROUGH (Input/Output)



End Feed

### CONFIGURATION OPTIONS

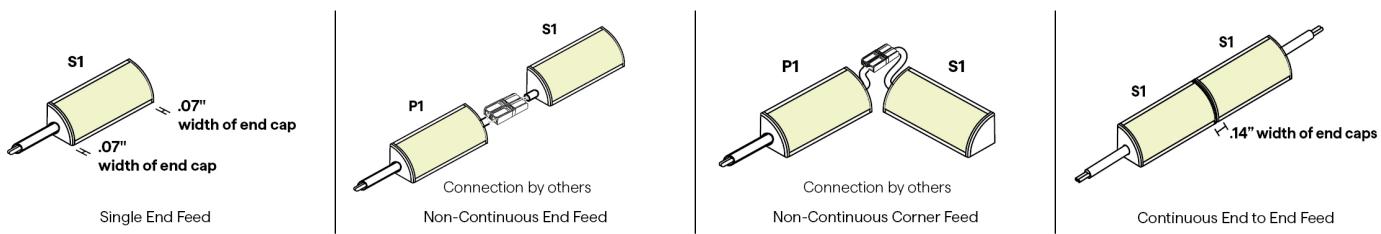




# ESSENTIALS ARKA-FLAT (01) STATIC WHITE

## 24VDC Linear Fixtures - Corner & Surface

### 8 / 9 CONNECTOR/WIRE – IN/OUT


Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

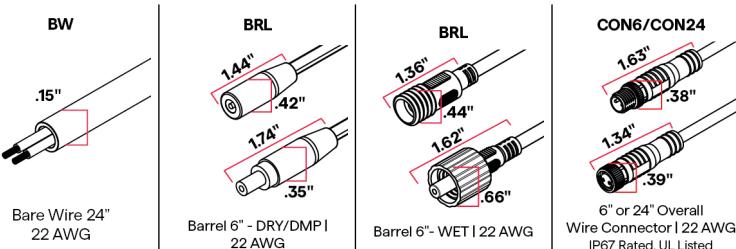


### 10 WIRE COLOR



### 12 MOUNTING

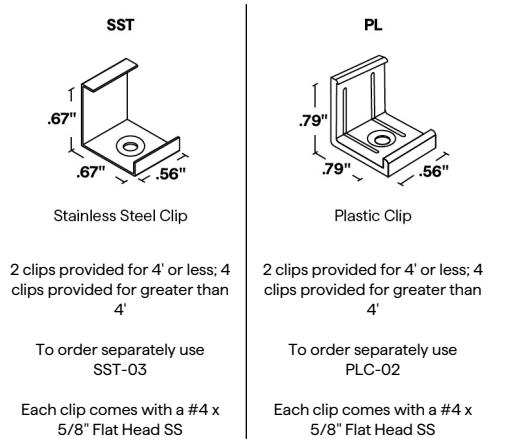

### 13 FINISH




Custom finishes require a longer lead time, consult factory

### 14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

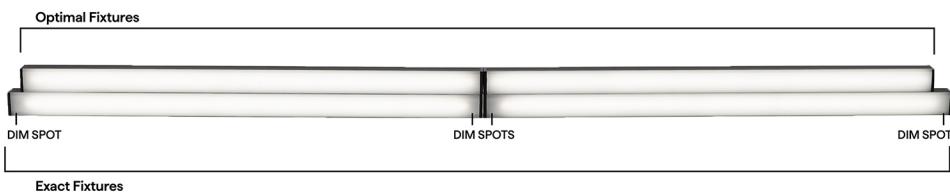



# ESSENTIALS ARKA-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Corner & Surface

## SW DRY DMP LENGTHS BY INCH

### EXACT LENGTH

| Requested Length | Potential dim spot on either end of a S1 fixture |          |
|------------------|--|----------|
|                  | S1   | IN       |
| 12"              | 0.5"   | End Feed |
| 13"              | 0.5"   |          |
| 14"              | 0.5"   |          |
| 15"              | 0.5"   |          |
| 16"              | 0.5"   |          |
| 17"              | 0.5"   |          |
| 18"              | 0.5"   |          |
| 19"              | 0.5"   |          |
| 20"              | 0.5"   |          |
| 21"              | 0.5"   |          |
| 22"              | 0.5"   |          |
| 23"              | 0.5"   |          |
| 24"              | 0.5"   |          |
| 36"              | 0.5"   |          |
| 48"              | 0.5"   |          |
| 60"              | 0.5"   |          |
| 72"              | 0.5"   |          |
| 84"              | 0.5"   |          |
| 96"              | 0.5"   |          |

### OPTIMAL LENGTH

| Requested Nominal Length | S1     | P1     |
|--------------------------|--------|--------|
|                          | S1     | P1     |
| 12"                      | 11.59" | 11.34" |
| 13"                      | 12.59" | 12.34" |
| 14"                      | 13.59" | 13.34" |
| 15"                      | 14.59" | 14.34" |
| 16"                      | 15.59" | 15.34" |
| 17"                      | 16.59" | 16.34" |
| 18"                      | 17.59" | 17.34" |
| 19"                      | 18.59" | 18.34" |
| 20"                      | 19.59" | 19.34" |
| 21"                      | 20.59" | 20.34" |
| 22"                      | 21.59" | 21.34" |
| 23"                      | 22.59" | 22.34" |
| 24"                      | 23.59" | 23.34" |
| 36"                      | 35.59" | 35.34" |
| 48"                      | 47.59" | 47.34" |
| 60"                      | 59.59" | 59.34" |
| 72"                      | 71.59" | 71.34" |
| 84"                      | 83.59" | 83.34" |
| 96"                      | 95.59" | 95.34" |

## SW WET LENGTHS BY INCH

### EXACT LENGTH

| Requested Length | Potential dim spot on either end of a S1 fixture |          |
|------------------|--|----------|
|                  | S1   | IN       |
| 12"              | 0.5"   | End Feed |
| 13"              | 0.5"   |          |
| 14"              | 0.5"   |          |
| 15"              | 0.5"   |          |
| 16"              | 0.5"   |          |
| 17"              | 0.5"   |          |
| 18"              | 0.5"   |          |
| 19"              | 0.5"   |          |
| 20"              | 0.5"   |          |
| 21"              | 0.5"   |          |
| 22"              | 0.5"   |          |
| 23"              | 0.5"   |          |
| 24"              | 0.5"   |          |
| 36"              | 0.5"   |          |
| 48"              | 0.5"   |          |
| 60"              | 0.5"   |          |
| 72"              | 0.5"   |          |
| 84"              | 0.5"   |          |
| 96"              | 0.5"   |          |

### OPTIMAL LENGTH

| Requested Nominal Length | S1     | P1     |
|--------------------------|--------|--------|
|                          | S1     | P1     |
| 12"                      | 11.44" | 11.29" |
| 13"                      | 12.44" | 12.29" |
| 14"                      | 13.44" | 13.29" |
| 15"                      | 14.44" | 14.29" |
| 16"                      | 15.44" | 15.29" |
| 17"                      | 16.44" | 16.29" |
| 18"                      | 17.44" | 17.29" |
| 19"                      | 18.44" | 18.29" |
| 20"                      | 19.44" | 19.29" |
| 21"                      | 20.44" | 20.29" |
| 22"                      | 21.44" | 21.29" |
| 23"                      | 22.44" | 22.29" |
| 24"                      | 23.44" | 23.29" |
| 36"                      | 35.44" | 35.29" |
| 48"                      | 47.44" | 47.29" |
| 60"                      | 59.44" | 59.29" |
| 72"                      | 71.44" | 71.29" |
| 84"                      | 83.44" | 83.29" |
| 96"                      | 95.44" | 95.29" |



# ESSENTIALS ARKA-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Corner & Surface

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

| DIM TO LEVEL        | INDOOR   |  | OUTDOOR   |   |
|---------------------|--|--|---|---|
|                     | SW24/1.5-4.0   | SW24/5.0, SW-HE, SW-HE+  | SW24/1.5-4.0  | SW24/5.0, SW-HE, SW-HE+   |
| <b>Dim to Black</b> | Q6M-DC+CAP<br>QTM-DC+CAP<br>iQ-PH+QD1  | Q6M-DC+CAP<br>QTM-DC+CAP<br>iQ-PH+QD1  | QOM-DC+CAP<br>QOM-PH  | QOM-DC+CAP<br>QOM-PH  |
| <b>0.1%</b>         | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QT-CAB-eLED+0-10V-AWN<br>QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+0-10V-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-BOWTIE+DIMMER<br>QZ-DMX<br>QZ-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QT-CAB-eLED+0-10V-AWN<br>QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+0-10V-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-BOWTIE+DIMMER<br>QZ-DMX<br>QZ-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP | Q-SET-QZ-DMX<br>Q-SET-QZ-PH/0-10V<br>Q-SET-eLED+0-10V<br>QOM-eLED+0-10V<br>QOM-eLED+DALI-DT6<br>QOM-eLED+PS-DALI-DT6<br>QZ-DMX<br>QZ-PH/0-10V | Q-SET-QZ-DMX<br>Q-SET-QZ-PH/0-10V<br>Q-SET-eLED+0-10V<br>QOM-eLED+0-10V<br>QOM-eLED+DALI-DT6<br>QOM-eLED+PS-DALI-DT6<br>QZ-DMX<br>QZ-PH/0-10V |
| <b>1%</b>           | QTM-eLED(E)<br>QZ-DALI-DT6   | QTM-eLED(E)<br>QZ-DALI-DT6   | Q-SET+QZ-DALI-DT6<br>QZ-DALI-DT6  | Q-SET+QZ-DALI-DT6<br>QZ-DALI-DT6  |
| <b>10%</b>          | Non-Dim Power Supply with SW App Dongle  | Non-Dim Power Supply with SW App Dongle  | Q-HEX-mini-DC<br>Q-SET-mLED   |   |



# ESSENTIALS ARKA-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Corner & Surface

| DIMMING PROTOCOL | INDOOR   |  | OUTDOOR   |  |
|------------------|--|--|---|--|
|                  | SW24/1.5-4.0   | SW24/5.0, SW-HE, SW-HE+  | SW24/1.5-4.0  | SW24/5.0, SW-HE, SW-HE+  |
| Non-Dim          | QT-CAB-eLED-ND<br>QTM-eLED-ND<br>QZ-ND   | QT-CAB-eLED-ND<br>QTM-eLED-ND<br>QZ-ND   | Q-SET-QZ-ND<br>Q-SET-eLED-ND<br>QOM-eLED-ND<br>QZ-ND                                    | Q-SET-QZ-ND<br>Q-SET-eLED-ND<br>QOM-eLED-ND<br>QZ-ND                   |
| Phase            | Q6M-DC+CAP<br>QT-CAB-QZ-PH/0-10V<br>QTM-DC+CAP<br>QTM-eLED(E)<br>QZ-BOWTIE+DIMMER<br>QZ-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP<br>iQ-PH+QD1           | Q6M-DC+CAP<br>QT-CAB-QZ-PH/0-10V<br>QTM-DC+CAP<br>QTM-eLED(E)<br>QZ-BOWTIE+DIMMER<br>QZ-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP<br>iQ-PH+QD1 | Q-HEX-mini-DC<br>Q-SET-QZ-PH/0-10V<br>Q-SET-mLED<br>QOM-DC+CAP<br>QOM-PH<br>QZ-PH/0-10V | Q-SET-QZ-PH/0-10V<br>QOM-DC+CAP<br>QOM-PH<br>QZ-PH/0-10V               |
| 0-10V            | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QT-CAB-eLED+0-10V-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+0-10V-AWN<br>QZ-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+0-10V-AWN<br>QZ-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP            | Q-SET-QZ-PH/0-10V<br>Q-SET-eLED+0-10V<br>QOM-eLED+0-10V<br>QZ-PH/0-10V                  | Q-SET-QZ-PH/0-10V<br>Q-SET-eLED+0-10V<br>QOM-eLED+0-10V<br>QZ-PH/0-10V |
| Lutron Athena    | QT-CAB-eLED+0-10V-AWN<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V-AWN<br>QTM-eLED+DALI-DT6-AWN   | QT-CAB-eLED+0-10V-AWN<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V-AWN<br>QTM-eLED+DALI-DT6-AWN   |   |  |
| ECO System       | QTM-eLED(E)  | QTM-eLED(E)  |   |  |
| DMX              | QZ-DMX   | QZ-DMX   | Q-SET-QZ-DMX<br>QZ-DMX  | Q-SET-QZ-DMX<br>QZ-DMX   |
| DALI-2: DT6      | QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-DALI-DT6  | QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-DALI-DT6                              | Q-SET+QZ-DALI-DT6<br>QOM-eLED+DALI-DT6<br>QZ-DALI-DT6                                   | Q-SET+QZ-DALI-DT6<br>QOM-eLED+DALI-DT6<br>QZ-DALI-DT6                  |
| SCENE App Dimmed | Non-Dim Power Supply with SW App Dongle  | Non-Dim Power Supply with SW App Dongle  |   |  |

## COMPATIBLE MOUNTING ACCESSORIES

|                                      |                                     |                                      |                              |                               |                           |                       |                     |                      |                        |
|--------------------------------------|-------------------------------------|--------------------------------------|------------------------------|-------------------------------|---------------------------|-----------------------|---------------------|----------------------|------------------------|
| <b>HINGE - HMB-M</b><br>1.41" .71"   | <b>HINGE - HMB-L</b><br>1.46" 1.29" | <b>HINGE - HMB-XL</b><br>1.46" 4"    | <b>Q-PIVOT</b><br>.75" 1.03" | <b>Q-ANGLE</b><br>1.38" 2.23" | <b>QUOVA-STANDARD</b><br> | <b>SD-J-LARGE</b><br> | <b>NL-LARGE</b><br> | <b>NJ-MEDIUM</b><br> | <b>SD-L-MEDIUM</b><br> |
| Adjustable mounting bracket - Medium | Adjustable mounting bracket - Large | Adjustable mounting bracket - XLarge | Small mounting accessory     | Adjustable mounting accessory | QUOVA Knife Edge          | J Mounting Bracket    | L Mounting Bracket  | J Mounting Bracket   | L Mounting Bracket     |