




ESSENTIALS EMBD-FLAT (01)

WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed



1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS	7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL
				STD										

Sample Part Number: EB1WD-6.0-30-DRY-STD-DF-P1-BW-BW-BK-CL2-SP-ST-48"-E

1 PRODUCT EB1WD LED engine is built with 2 wires suitable for phase dimming control. See following pages for compatible power supplies.	2 WATTS/FT 6.0 6.0W/ft 1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE 1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE	3 CCT 19/27 1900K/2700K 19/30 1900K/3000K 20/27 2000K/2700K 20/30 2000K/3000K 27/40 2700K/4000K 27/55 2700K/5500K 24/30 2400K/3000K 27/40 2700K/4000K	4 RATED DRY IP20 WET IP67 Can be suitable for exterior use, contact factory for more information	5 EFFICIENCY STD Standard	6 LENS DF Diffused PR Polar FR Frosted For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages
7 WIRE INPUT/OUTPUT S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed P1 Pass Through 1 (Input/output) - End Feed P2 Pass Through 2 (Input/output) - Bottom Feed	8 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24" BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"	9 CONNECTOR/WIRE OUT CLS Closed End (No feed)	10 WIRE COLOR WH White BK Black N/A For Barrel wet barrel only available in black		
11 WIRE TYPE CL2 Class 2 CL2P Plenum Rated N/A For Barrel CL2P only available with bare wire leads (BW)	12 MOUNTING SP Spring Clip MG Magnet	13 FINISH ST Satin CU Custom Custom finishes require a longer lead time, consult factory	14 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	15 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	

For continuous mounting, consider bottom feed.

BRL only available with EB1WD
BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

BRL only available with EB1WD
BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

CL2 Class 2
CL2P Plenum Rated
N/A For Barrel

SP	Spring Clip
MG	Magnet

ST	Satin
CU	Custom

Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".

O Optimal Illumination
E Exact Specified Length


Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.




ESSENTIALS EMBD-FLAT (01) WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed


1 PRODUCT - DIMENSIONS




Profile with flat lens



Profile with flat lens and magnet mounting clip



Profile with flat lens and spring mounting clip



Spring mounting clip

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with EB1WD-6.0-30-DRY-STD

	3000K	
	LM/FT	CRI
FR	386	97
PR	342	97
DF	289	97

[Calculated L70 = 70000 hrs]
Tested with EB1DW-**-30-DRY-STD

	1.5HE W/FT		2.5HE W/FT	
	LM/FT	CRI	LM/FT	CRI
FR	127	98	200	98
PR	110	98	174	98
DF	94	98	148	98

6 DIODE VISIBILITY



DF - Diffused lens

PR - Polar lens



FR - Frosted lens

TEMPERATURE RATINGS

		WD 6.0 W/FT		DW 1.5 HE W/FT		DW 3.0 HE W/FT		DW 2.5 HE W/FT		DW 5.0 HE W/FT	
		WD 6.0 W/FT		DW 1.5 HE W/FT		DW 3.0 HE W/FT		DW 2.5 HE W/FT		DW 5.0 HE W/FT	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Recessed	-4°F	110°F	-4°F	140°F	-4°F	125°F	-4°F	130°F	-4°F	110°F
DMP	Ambient Operating Temp - Recessed	**	**	-4°F	135°F	-4°F	120°F	-4°F	125°F	-4°F	105°F
WET	Ambient Operating Temp - Recessed	-4°F	105°F	-4°F	135°F	-4°F	120°F	-4°F	125°F	-4°F	105°F




ESSENTIALS EMBD-FLAT (01) WARM DIM APPLICATIONS


24VDC Linear Fixtures - Recessed

7 WIRE INPUT/OUTPUT






SINGLE (Input only)



PASS THROUGH (Input/Output)



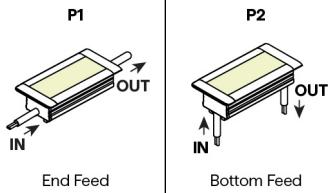


CONFIGURATION OPTIONS




8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out



10 WIRE COLOR



White




Black



ESSENTIALS EMBD-FLAT (01) WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed

12 MOUNTING

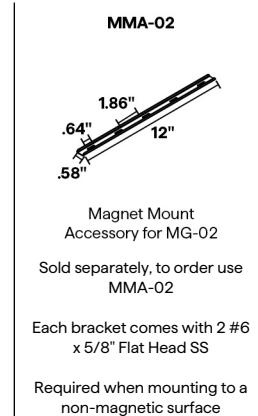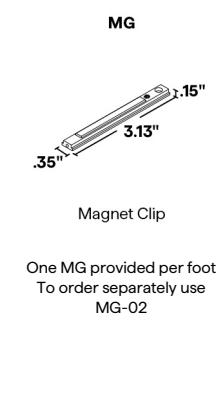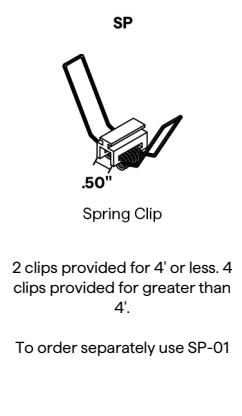

13 FINISH




Custom finishes require a longer lead time, consult factory

14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

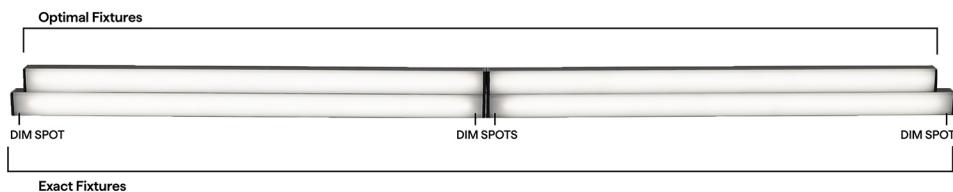

WD DRY LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture S1 End Feed
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed
12"	10.41"		10.66"	
13"	12.41"		12.66"	
14"	12.41"		12.66"	
15"	14.41"		14.66"	
16"	14.41"		14.66"	
17"	16.41"		16.66"	
18"	16.41"		16.66"	
19"	18.41"		18.66"	
20"	18.41"		18.66"	
21"	20.41"		20.66"	
22"	20.41"		20.66"	
23"	22.41"		22.66"	
24"	22.41"		22.66"	
36"	34.41"		34.66"	
48"	46.41"		46.66"	
60"	58.41"		58.66"	
72"	70.41"		70.66"	
84"	82.41"		82.66"	
96"	94.41"		94.66"	



ESSENTIALS EMBD-FLAT (01) WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed

WD WET LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1	S2	P1	P2
12"	10.61"		10.76"	
13"	12.61"		12.76"	
14"	12.61"		12.76"	
15"	14.61"		14.76"	
16"	14.61"		14.76"	
17"	16.61"		16.76"	
18"	16.61"		16.76"	
19"	18.61"		18.76"	
20"	18.61"		18.76"	
21"	20.61"		20.76"	
22"	20.61"		20.76"	
23"	22.61"		22.76"	
24"	22.61"		22.76"	
36"	34.61"		34.76"	
48"	46.61"		46.76"	
60"	58.61"		58.76"	
72"	70.61"		70.76"	
84"	82.61"		82.76"	
96"	94.61"		94.76"	

DW-HE DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1	S2	P1	P2
12"	10.51"		10.86"	
13"	12.51"		12.86"	
14"	12.51"		12.86"	
15"	14.51"		14.86"	
16"	14.51"		14.86"	
17"	16.51"		16.86"	
18"	16.51"		16.86"	
19"	18.51"		18.86"	
20"	18.51"		18.86"	
21"	20.51"		20.86"	
22"	20.51"		20.86"	
23"	22.51"		22.86"	
24"	22.51"		22.86"	
36"	34.51"		34.86"	
48"	46.51"		46.86"	
60"	58.51"		58.86"	
72"	70.51"		70.86"	
84"	82.51"		82.86"	
96"	94.51"		94.86"	



ESSENTIALS EMBD-FLAT (01) WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed

DW-HE WET LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture	
	S1	End Feed
12"	1"	
13"	0.5"	
14"	1"	
15"	0.5"	
16"	1"	
17"	0.5"	
18"	1"	
19"	0.5"	
20"	1"	
21"	0.5"	
22"	1"	
23"	0.5"	
24"	1"	
36"	1"	
48"	1"	
60"	1"	
72"	1"	
84"	1"	
96"	1"	

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1	S2	P1	P2
12"	10.66"		11.06"	
13"	12.66"		11.06"	
14"	12.66"		13.06"	
15"	14.66"		13.06"	
16"	14.66"		15.06"	
17"	16.66"		15.06"	
18"	16.66"		17.06"	
19"	18.66"		17.06"	
20"	18.66"		19.06"	
21"	20.66"		19.06"	
22"	20.66"		21.06"	
23"	22.66"		21.06"	
24"	22.66"		23.06"	
36"	34.66"		35.06"	
48"	46.66"		47.06"	
60"	58.66"		59.06"	
72"	70.66"		71.06"	
84"	82.66"		83.06"	
96"	94.66"		95.06"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	DW-HE Warm Dim Applications	WD	DW-HE Warm Dim Applications	WD
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DW QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT8 QOM-eLED+PS-DALI-DT6 QOM-eLED+PS-DALI-DT8 QOM-eLED+WD QZ-DW	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QZ-DALI-DT8	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with WD App Dongle	Non-Dim Power Supply with SW App Dongle		



ESSENTIALS EMBD-FLAT (01) WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed

DIMMING PROTOCOL	INDOOR		OUTDOOR	
	DW-HE Warm Dim Applications	WD	DW-HE Warm Dim Applications	WD
Phase	QZ-DW	QT-CAB-QZ-PH/0-10V QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DW QZ-DW	Q-SET-QZ-PH/0-10V QZ-PH/0-10V
0-10V	QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QTM-eLED+0-10V QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DW QOM-eLED+WD QZ-DW	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN	QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6-AWN		
ECO System		QTM-eLED(E)		
DMX If using DW LED, wattage must be doubled		QZ-DMX		QZ-DMX
DALI-2: DT6 If using DW LED, wattage must be doubled except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QOM-eLED+DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
DALI-2: DT8 If using DW LED, wattage must be doubled except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8		Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8	
SCENE App Dimmed	Non-Dim Power Supply with WD App Dongle	Non-Dim Power Supply with SW App Dongle		

COMPATIBLE MOUNTING ACCESSORIES

MMA-02



Magnet Mount Accessory
of MG-02