





ESSENTIALS EMBD-FLAT (01) RGB

24VDC Linear Fixtures - Recessed

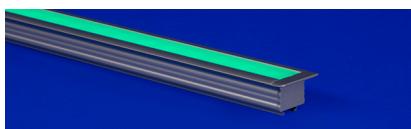

- Recessed flanged fixture designed for drywall and millwork installations
- Choose from diffused, polar, or frosted lens options
- Mounting options include spring or magnet mounting clips
- Features painted end caps to match extrusion finish
- Can be suitable for exterior use when specified as wet, contact factory for more information
- Red, Green, and Blue LED allows for color changing applications
- Features 7 diodes per 2" cut point

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS	7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL
EB1RGB	6.0	RGB		STD										

Sample Part Number: EB1RGB-6.0-RGB-DRY-STD-DF-P1-BW-BW-BK-CL2-SP-ST-48"-E


1 PRODUCT EB1RGB See following pages for compatible power supplies.	2 WATTS/FT 6.0 6.0W/ft	3 CCT RGB	4 RATED DRY IP20 DMP IP54 WET IP67 Can be suitable for exterior use, contact factory for more information	5 EFFICIENCY STD Standard	6 LENS DF Diffused PR Polar FR Frosted For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages
7 WIRE INPUT/OUTPUT S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed	8 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"	9 CONNECTOR/WIRE OUT CLS Closed End (No feed)	10 WIRE COLOR WH White BK Black		
For continuous mounting, consider bottom feed.	BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)			
11 WIRE TYPE CL2 Class 2 CL2P Plenum Rated CL2P only available with bare wire leads (BW)	12 MOUNTING SP Spring Clip MG Magnet	13 FINISH ST Satin CU Custom Custom finishes require a longer lead time, consult factory	14 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	15 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	




ESSENTIALS EMBD-FLAT (01) RGB

24VDC Linear Fixtures - Recessed


1 PRODUCT - DIMENSIONS




Profile with flat lens



Profile with flat lens and magnet mounting clip



Profile with flat lens and spring mounting clip



Spring mounting clip

2 DELIVERED LUMENS

[Calculated L70 = 55000 hrs]
Tested with EB1RGB-6.0-RGB-DRY-STD

	Red		Green		Blue		All	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	
FR	71	633	148	523	41	469	238	
PR	61	633	129	523	35	469	207	
DF	52	633	109	523	30	469	175	

6 DIODE VISIBILITY



DF - Diffused lens

PR - Polar lens

FR - Frosted lens

TEMPERATURE RATINGS

		6.0 W/FT	
		Min	Max
DRY	Ambient Operating Temp - Recessed	-13°F	105°F
DMP	Ambient Operating Temp - Recessed	-13°F	100°F
WET	Ambient Operating Temp - Recessed	-13°F	100°F




ESSENTIALS EMBD-FLAT (01) RGB


24VDC Linear Fixtures - Recessed

7 WIRE INPUT/OUTPUT


SINGLE (Input only)




PASS THROUGH (Input/Output)




CONFIGURATION OPTIONS




Single End Feed




Non-Continuous End Feed



Non-Continuous Corner Feed




Non-Continuous Bottom Feed



Non-Continuous End to End Feed

8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

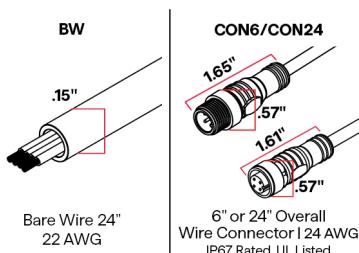

10 WIRE COLOR



White




Black



ESSENTIALS EMBD-FLAT (01) RGB

24VDC Linear Fixtures - Recessed

12 MOUNTING

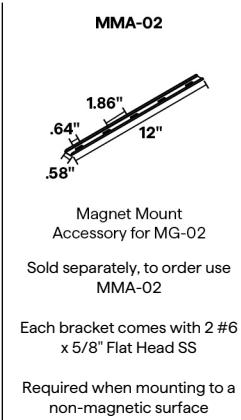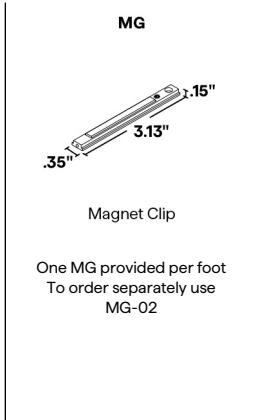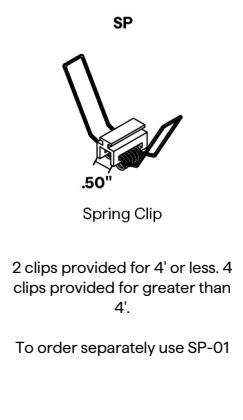

13 FINISH




Custom finishes require a longer lead time, consult factory

14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

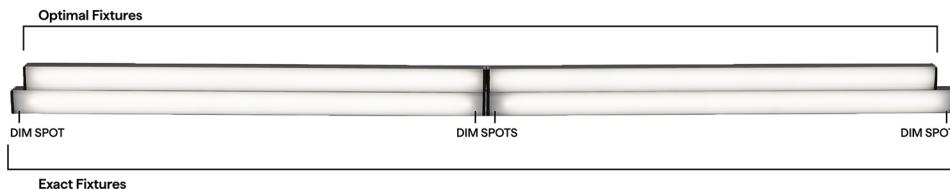

RGB DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture S1 End Feed
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed
12"	10.51"		10.86"	
13"	12.51"		12.86"	
14"	12.51"		12.86"	
15"	14.51"		14.86"	
16"	14.51"		14.86"	
17"	16.51"		16.86"	
18"	16.51"		16.86"	
19"	18.51"		18.86"	
20"	18.51"		18.86"	
21"	20.51"		20.86"	
22"	20.51"		20.86"	
23"	22.51"		22.86"	
24"	22.51"		22.86"	
36"	34.51"		34.86"	
48"	46.51"		48.86"	
60"	58.51"		58.86"	
72"	70.51"		70.86"	
84"	82.51"		82.86"	
96"	94.51"		94.86"	



ESSENTIALS EMBD-FLAT (01) RGB

24VDC Linear Fixtures - Recessed

RGB WET LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture	
	S1	End Feed
12"	1"	
13"	0.5"	
14"	1"	
15"	0.5"	
16"	1"	
17"	0.5"	
18"	1"	
19"	0.5"	
20"	1"	
21"	0.5"	
22"	1"	
23"	0.5"	
24"	1"	
36"	1"	
48"	1"	
60"	1"	
72"	1"	
84"	1"	
96"	1"	

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1	S2	P1	P2
12"	10.66"		11.06"	
13"	12.66"		11.06"	
14"	12.66"		13.06"	
15"	14.66"		13.06"	
16"	14.66"		15.06"	
17"	16.66"		15.06"	
18"	16.66"		17.06"	
19"	18.66"		17.06"	
20"	18.66"		19.06"	
21"	20.66"		19.06"	
22"	20.66"		21.06"	
23"	22.66"		21.06"	
24"	22.66"		23.06"	
36"	34.66"		35.06"	
48"	46.66"		47.06"	
60"	58.66"		59.06"	
72"	70.66"		71.06"	
84"	82.66"		83.06"	
96"	94.66"		95.06"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	RGB	RGB
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT8 QOM-eLED+DMX QOM-eLED+PS-DALI-DT8 QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with RGB App Dongle	

DIMMING PROTOCOL	INDOOR	OUTDOOR
	RGB	RGB
DMX	QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8



ESSENTIALS EMBD-FLAT (01) RGB

24VDC Linear Fixtures - Recessed

COMPATIBLE MOUNTING ACCESSORIES

MMA-02



Magnet Mount Accessory
of MG-02

COMPATIBLE WIRING ACCESSORIES

Q-mini-J5



UL Listed, miniature
junction box, DRY/DMP
(WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth
Connectivity

IQ-DMX-STICK-QA2



DMX controller for
changing color &
dimming

IQ-DMX-STICK-DE3



DMX controller for
changing color &
dimming

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage