




# ESSENTIALS EMBD-FLAT (01)

## STATIC WHITE

24VDC Linear Fixtures - Recessed



### INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/ FT	CCT	RATED	EFFICIENCY	LENS
EB1SW				STD	

### ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15
WIRE INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/OPTIMAL

Sample Part Number: EB1SW-5.0-30-DRY-STD-DF-P1-BW-BW-BK-CL2-SP-ST-48"-E

<b>1</b> <b>PRODUCT</b>  EB1SW EB1SW-USA  Select USA option for BAA and BABA projects. Only DRY or WET ratings apply.  See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b>  1.5 1.5W/ft 3.0 3.0W/ft 4.0 4.0W/ft 5.0 5.0W/ft  1.5 1.5W/ft 3.0 3.0W/ft 4.0 4.0W/ft 5.0 5.0W/ft	<b>3</b> <b>CCT</b>  20 2000K 22 2200K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K  24 2400K 27 2700K 30 3000K 35 3500K 40 4000K	<b>4</b> <b>RATED</b>  DRY IP20 WET IP67  Can be suitable for exterior use, contact factory for more information	<b>5</b> <b>EFFICIENCY</b>  STD Standard	<b>6</b> <b>LENS</b>  DF Diffused PR Polar FR Frosted  For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages
<b>7</b> <b>WIRE INPUT/OUTPUT</b>  SINGLE (Input only) S1 End Feed S2 Bottom Feed  For continuous mounting, consider bottom feed.	<b>8</b> <b>CONNECTOR/WIRE IN</b>  BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"  BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>9</b> <b>CONNECTOR/WIRE OUT</b>  CLS Closed End (No feed)	<b>10</b> <b>WIRE COLOR</b>  WH White BK Black N/A For Barrel  wet barrel only available in black		
<b>11</b> <b>WIRE TYPE</b>  CL2 Class 2 CL2P Plenum Rated N/A For Barrel  CL2P only available with bare wire leads (BW)	<b>12</b> <b>MOUNTING</b>  SP Spring Clip MG Magnet	<b>13</b> <b>FINISH</b>  ST Satin CU Custom  Custom finishes require a longer lead time, consult factory	<b>14</b> <b>LENGTH (IN)</b>  Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>15</b> <b>EXACT/OPTIMAL</b>  O Optimal Illumination E Exact Specified Length  Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




# ESSENTIALS EMBD-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Recessed


## 1 PRODUCT - DIMENSIONS




Profile with flat lens



Profile with flat lens and magnet mounting clip



Profile with flat lens and spring mounting clip



Spring mounting clip

## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]  
Tested with EB1SW-\*\*-30-DRY-STD


	1.5 W/FT		3.0 W/FT		4.0 W/FT		5.0 W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
FR	123	98	214	98	266	98	324	98
PR	107	98	186	98	231	98	282	98
DF	91	98	158	98	196	98	239	98

## TEMPERATURE RATINGS


		1.5 W/FT		3.0 W/FT		4.0 W/FT		5.0 W/FT	
		Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Recessed	-4°F	135°F	-4°F	130°F	-4°F	120°F	-4°F	110°F
DMP	Ambient Operating Temp - Recessed	-4°F	130°F	-4°F	125°F	-4°F	115°F	-4°F	105°F
WET	Ambient Operating Temp - Recessed	-4°F	130°F	-4°F	125°F	-4°F	115°F	-4°F	105°F

## 7 WIRE INPUT/OUTPUT

SINGLE (Input only)



PASS THROUGH (Input/Output)










# ESSENTIALS EMBD-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Recessed





## CONFIGURATION OPTIONS

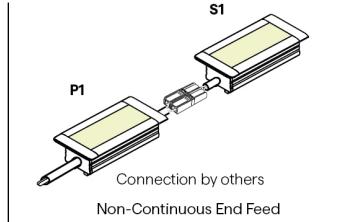

Non-Continuous End to End Feed

## 8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

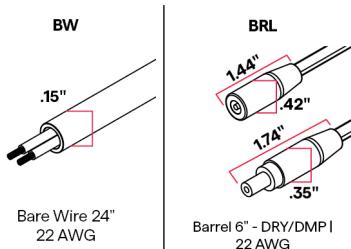

## 10 WIRE COLOR



## 12 MOUNTING




2 clips provided for 4' or less. 4 clips provided for greater than 4'.

To order separately use SP-01



One MG provided per foot  
To order separately use MG-02



Magnet Mount Accessory for MG-02  
Sold separately, to order use MMA-02  
Each bracket comes with 2 #6 x 5/8" Flat Head SS  
Required when mounting to a non-magnetic surface

## 13 FINISH



Custom finishes require a longer lead time, consult factory



# ESSENTIALS EMBD-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Recessed


## 15 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

Optimal Fixtures

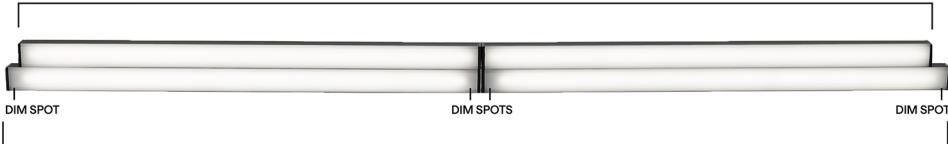

Exact Fixtures

### SW DRY, DMP LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is  $\pm 0 - 1/8"$ . Consult factory for lengths under 12".

#### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	.5"
13"	.5"
14"	.5"
15"	.5"
16"	.5"
17"	.5"
18"	.5"
19"	.5"
20"	.5"
21"	.5"
22"	.5"
23"	.5"
24"	.5"
36"	.5"
48"	.5"
60"	.5"
72"	.5"
84"	.5"
96"	.5"

#### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed
12"	11.41"		11.66"	
13"	12.41"		12.66"	
14"	13.41"		13.66"	
15"	14.41"		14.66"	
16"	15.41"		15.66"	
17"	16.41"		16.66"	
18"	17.41"		17.66"	
19"	18.41"		18.66"	
20"	19.41"		19.66"	
21"	20.41"		20.66"	
22"	21.41"		21.66"	
23"	22.41"		22.66"	
24"	23.41"		23.66"	
36"	35.41"		35.66"	
48"	47.41"		47.66"	
60"	59.41"		59.66"	
72"	71.41"		71.66"	
84"	83.41"		83.66"	
96"	95.41"		95.66"	



# ESSENTIALS EMBD-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Recessed

## SW WET LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is  $\pm 0 - 1/8"$ . Consult factory for lengths under 12".

### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	.5"
13"	.5"
14"	.5"
15"	.5"
16"	.5"
17"	.5"
18"	.5"
19"	.5"
20"	.5"
21"	.5"
22"	.5"
23"	.5"
24"	.5"
36"	.5"
48"	.5"
60"	.5"
72"	.5"
84"	.5"
96"	.5"

### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed
12"	11.56"		11.71"	
13"	12.56"		12.71"	
14"	13.56"		13.71"	
15"	14.56"		14.71"	
16"	15.56"		15.71"	
17"	16.56"		16.71"	
18"	17.56"		17.71"	
19"	18.56"		18.71"	
20"	19.56"		19.71"	
21"	20.56"		20.71"	
22"	21.56"		21.71"	
23"	22.56"		22.71"	
24"	23.56"		23.71"	
36"	35.56"		35.71"	
48"	47.56"		47.71"	
60"	59.56"		59.71"	
72"	71.56"		71.71"	
84"	83.56"		83.71"	
96"	95.56"		95.71"	

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has  $\pm 5\%$  tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1	Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1	QOM-DC+CAP QOM-PH	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED/0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED/0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED	



# ESSENTIALS EMBD-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Recessed

DIMMING PROTOCOL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND iQ-ND-50-65	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND iQ-ND-50-65
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN		
ECO System	QTM-eLED(E)	QTM-eLED(E)		
DMX	QZ-DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle		

## COMPATIBLE MOUNTING ACCESSORIES

MMA-02



Magnet Mount Accessory  
of MG-02