



ESSENTIALS EMBD-OPTICS (02)

SW-HE

24VDC Linear Fixtures - Recessed



410.2 & 410.1
Closet Rated
up to 4.0W/ft



SW-HE
ONLY





1



1



A8
D16

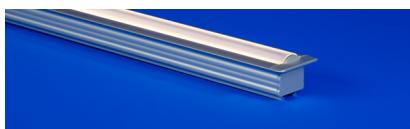

- Recessed flanged fixture designed for drywall and millwork installations
- Choose from 12°, 14°, 20°, 30°, 45° or 60° beam angles
- Mounting options include magnet or spring mounting clips
- Features painted end caps to match extrusion finish
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations
- Can be suitable for exterior use when specified as wet, contact factory for more information

Sample Part Number: **EB2SW-3.0HE-30-DRY-STD-20-P1-BW-BW-BK-CL2-SP-ST-48"-E**


1	PRODUCT	2	WATTS/FT	3	CCT	4	RATED	5	EFFICIENCY	6	LENS
	EB2SW EB2SW-USA Select USA option for BAA and BABA projects. SW-HE only. Only DRY ratings apply. See following pages for compatible power supplies.		1.5HE 1.5W/ft HE 3.0HE 3.0W/ft HE 6.0HE 6.0W/ft HE		20 2000K 22 2200K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K		DRY IP20		STD Standard		12 Optical 12° 14 Optical 14° 20 Optical 20° 30 Optical 30° DRY or DMP only 45 Optical 45° DRY or DMP only 60 Optical 60° DRY or DMP only
			3.0HE+ 3.0W/ft HE+ 6.0HE+ 6.0W/ft HE+		27 2700K 30 3000K 35 3500K 40 4000K						For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages.
			1.5HE 1.5W/ft HE 3.0HE 3.0W/ft HE 6.0HE 6.0W/ft HE		24 2400K 27 2700K 30 3000K 35 3500K 40 4000K		DMP IP54				
			3.0HE+ 3.0W/ft HE+		27 2700K 30 3000K 35 3500K 40 4000K		WET IP67 Can be suitable for exterior use, contact factory for more information				
7	WIRE INPUT/OUTPUT	8	CONNECTOR/WIRE IN	9	CONNECTOR/WIRE OUT	10	WIRE COLOR				
	S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed		BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"		CLS Closed End (No feed)		WH White BK Black N/A For Barrel				
	P1 Pass Through 1 (Input/output) - End Feed P2 Pass Through 2 (Input/output) - Bottom Feed		BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"		BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"						
	For continuous mounting, consider bottom feed.		BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)		BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)						
11	WIRE TYPE	12	MOUNTING	13	FINISH	14	LENGTH (IN)	15	EXACT/OPTIMAL		
	CL2 Class 2 CL2P Plenum Rated N/A For Barrel CL2P only available with bare wire leads (BW)		SP Spring Clip MG Magnet		ST Satin CU Custom Custom finishes require a longer lead time, consult factory		 Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".		O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.		



ESSENTIALS EMBD-OPTICS (02) SW-HE

24VDC Linear Fixtures - Recessed

1 PRODUCT - DIMENSIONS

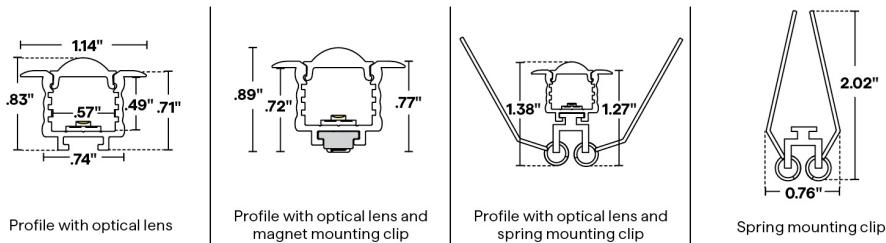


2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs, L70 = 50000 for HE+]

Tested with EB2SW-**-30-DRY-STD

	1.5HE W/FT		3.0HE W/FT		3.0HE+ W/FT		6.0HE W/FT		6.0HE+ W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
12	163	98	299	98	412	92	566	98	761	92
14	174	98	320	98	461	92	606	98	853	92
20	185	98	339	98	483	92	642	98	892	92
30	189	98	346	98	499	92	656	98	923	92
45	213	98	390	98	547	92	738	98	1011	92
60	210	98	384	98	545	92	728	98	1006	92

6 DIODE VISIBILITY

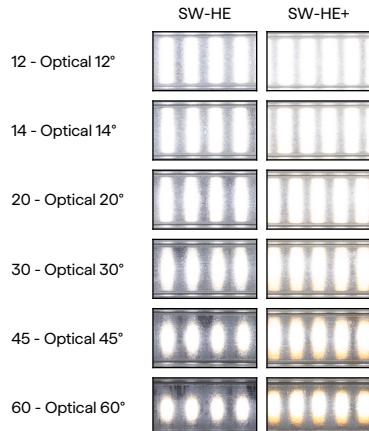




ESSENTIALS EMBD-OPTICS (02) SW-HE

24VDC Linear Fixtures - Recessed

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

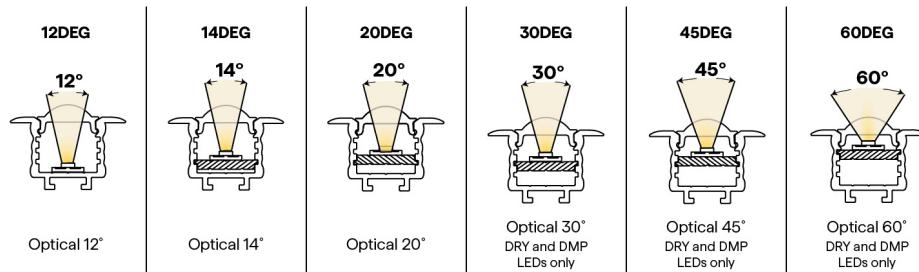


TEMPERATURE RATINGS


		1.5 HE W/FT		3.0 HE W/FT		3.0 HE+ W/FT		6.0 HE W/FT		6.0 HE+ W/FT	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Recessed	-4°F	140°F	-4°F	135°F	-13°F	135°F	-4°F	110°F	-13°F	110°F
DMP	Ambient Operating Temp - Recessed	-4°F	135°F	-4°F	130°F	**	**	-4°F	105°F	**	**
WET	Ambient Operating Temp - Recessed	-4°F	135°F	-4°F	130°F	-13°F	130°F	-4°F	105°F	**	**

7 WIRE INPUT/OUTPUT






SINGLE (Input only)



PASS THROUGH (Input/Output)



CONFIGURATION OPTIONS






ESSENTIALS EMBD-OPTICS (02) SW-HE

24VDC Linear Fixtures - Recessed

8 / 9 CONNECTOR/WIRE - IN/OUT


Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

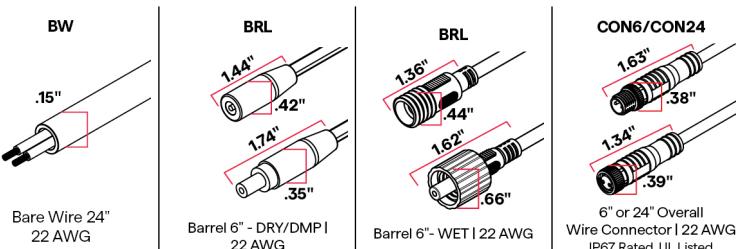

10 WIRE COLOR



12 MOUNTING

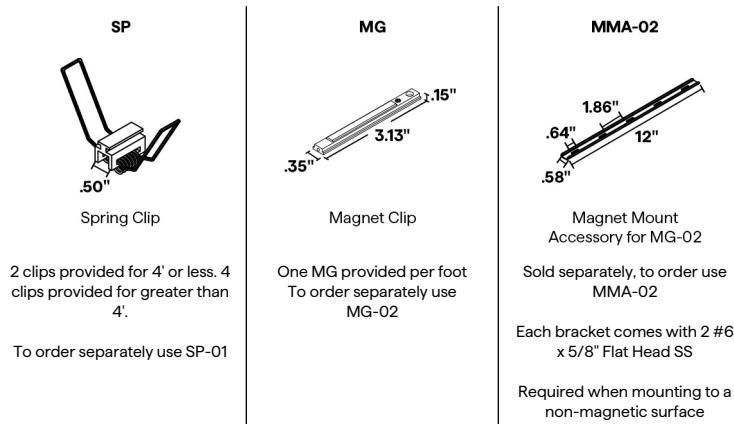

13 FINISH




Custom finishes require a longer lead time, consult factory

14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

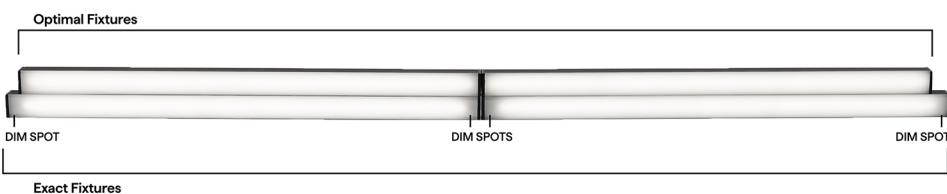



ESSENTIALS EMBD-OPTICS (02) SW-HE

24VDC Linear Fixtures - Recessed

SW-HE, SW-HE+ DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture	
	S1	End Feed
12"	1"	
13"	0.5"	
14"	1"	
15"	0.5"	
16"	1"	
17"	0.5"	
18"	1"	
19"	0.5"	
20"	1"	
21"	0.5"	
22"	1"	
23"	0.5"	
24"	1"	
36"	1"	
48"	1"	
60"	1"	
72"	1"	
84"	1"	
96"	1"	

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1	S2	P1	P2
12"	10.41"		10.66"	
13"	12.41"		12.66"	
14"	12.41"		12.66"	
15"	14.41"		14.66"	
16"	14.41"		14.66"	
17"	16.41"		16.66"	
18"	16.41"		16.66"	
19"	18.41"		18.66"	
20"	18.41"		18.66"	
21"	20.41"		20.66"	
22"	20.41"		20.66"	
23"	22.41"		22.66"	
24"	22.41"		22.66"	
36"	34.41"		34.66"	
48"	46.41"		46.66"	
60"	58.41"		58.66"	
72"	70.41"		70.66"	
84"	82.41"		82.66"	
96"	94.41"		94.66"	

SW-HE+ WET LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture	
	S1	End Feed
12"	1"	
13"	0.5"	
14"	1"	
15"	0.5"	
16"	1"	
17"	0.5"	
18"	1"	
19"	0.5"	
20"	1"	
21"	0.5"	
22"	1"	
23"	0.5"	
24"	1"	
36"	1"	
48"	1"	
60"	1"	
72"	1"	
84"	1"	
96"	1"	

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1	S2	P1	P2
12"	10.61"		10.76"	
13"	12.61"		12.76"	
14"	12.61"		12.76"	
15"	14.61"		14.76"	
16"	14.61"		14.76"	
17"	16.61"		16.76"	
18"	16.61"		16.76"	
19"	18.61"		18.76"	
20"	18.61"		18.76"	
21"	20.61"		20.76"	
22"	20.61"		20.76"	
23"	22.61"		22.76"	
24"	22.61"		22.76"	
36"	34.61"		34.76"	
48"	46.61"		46.76"	
60"	58.61"		58.76"	
72"	70.61"		70.76"	
84"	82.61"		82.76"	
96"	94.61"		94.76"	



ESSENTIALS EMBD-OPTICS (02) SW-HE

24VDC Linear Fixtures - Recessed

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	SW24/5.0, SW-HE, SW-HE+	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	

DIMMING PROTOCOL	INDOOR	OUTDOOR
	SW24/5.0, SW-HE, SW-HE+	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	
ECO System	QTM-eLED(E)	
DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	



ESSENTIALS EMBD-OPTICS (02) SW-HE

24VDC Linear Fixtures - Recessed

COMPATIBLE MOUNTING ACCESSORIES

MMA-02



Magnet Mount Accessory
of MG-02