




# ESSENTIALS FLUR™-FLAT (01)

## STATIC COLOR

24VDC Linear Fixtures - Recessed



Red List Approved  
Declare.



- Deep flanged recessed fixture
- Choose from diffused, polar, frosted, clear 45°, clear 60°, or clear 80° lens options for varying diode visibility and beam angles
- Offered with an optional mounting tray
- Stainless steel mounting clips
- Features painted end caps to match extrusion finish
- Red, Green, Blue or Amber LEDs available
- FWC Q-Tran Red & Amber LED products are Florida Fish and Wildlife Conservation Commission certified, making them safe for turtles and other wildlife
- Suitable for exterior use when specified as wet

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS	7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL
FL1SC	5.0										SST			

Sample Part Number: FL1SC-5.0-GR-DRY-WO-DF-P1-BW-BW-BK-CL2-SST-BK-48"-E


<b>1</b> <b>PRODUCT</b>  FL1SC  See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b>  5.0 5.0W/ft	<b>3</b> <b>CCT</b>  A Amber B Blue G Green R Red	<b>4</b> <b>RATED</b>  DRY IP20 DMP IP54 WET IP67	<b>5</b> <b>EFFICIENCY</b>  STD Standard WO White Optics  WhiteOptics - Internal coating, greater lumen output	<b>6</b> <b>LENS</b>  DF Diffused PR Polar FR Frosted CL/45 Clear 45° CL/60 Clear 60° CL/80 Clear 80°  For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages
<b>7</b> <b>WIRE INPUT/OUTPUT</b>  S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed  P1 Pass Through 1 (Input/output) - End Feed P2 Pass Through 2 (Input/output) - Bottom Feed	<b>8</b> <b>CONNECTOR/WIRE IN</b>  BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"  BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"	<b>9</b> <b>CONNECTOR/WIRE OUT</b>  CLS Closed End (No feed)  BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"	<b>10</b> <b>WIRE COLOR</b>  WH White BK Black N/A For Barrel wet barrel only available in black		
For continuous mounting, consider bottom feed.	BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)			
<b>11</b> <b>WIRE TYPE</b>  CL2 Class 2 CL2P Plenum Rated N/A For Barrel  CL2P only available with bare wire leads (BW)	<b>12</b> <b>MOUNTING</b>  SST Stainless Steel	<b>13</b> <b>FINISH</b>  ST Satin BK Black CU Custom  Custom finishes require a longer lead time, consult factory	<b>14</b> <b>LENGTH (IN)</b>  Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>15</b> <b>EXACT/OPTIMAL</b>  O Optimal Illumination E Exact Specified Length  Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	



# ESSENTIALS FLUR™-FLAT (01) STATIC COLOR

## 24VDC Linear Fixtures - Recessed

### 1 PRODUCT - DIMENSIONS

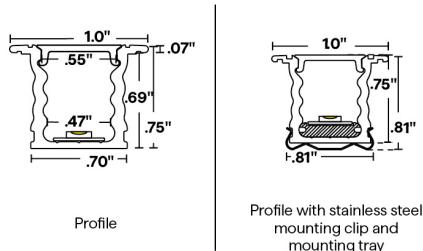

### 2 DELIVERED LUMENS


[Calculated L70 = 30000 hrs]  
Tested with FL1SC-5.0-\*\*-DRY-STD

	Red		Green		Blue		Amber	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH
45	71	633	384	517	100	466	64	597
60	72	633	388	517	101	466	65	597
80	76	633	411	517	107	466	69	597
FR	69	633	373	517	97	466	62	597
PR	56	633	305	517	79	466	51	597
DF	42	633	226	517	59	466	38	597

[Calculated L70 = 30000 hrs]  
Tested with FL1SC-5.0-\*\*-DRY-WO

	Red		Green		Blue		Amber	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH
45	78	633	422	517	110	466	71	597
60	79	633	426	517	111	466	71	597
80	82	633	442	517	115	466	74	597
FR	76	633	414	517	107	466	69	597
PR	65	633	349	517	91	466	58	597
DF	50	633	268	517	70	466	45	597

### 6 DIODE VISIBILITY

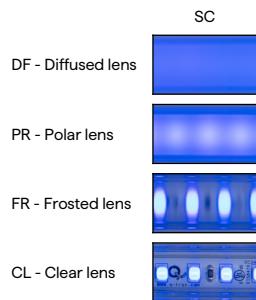




# ESSENTIALS FLUR™-FLAT (01) STATIC COLOR

## 24VDC Linear Fixtures - Recessed

### PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

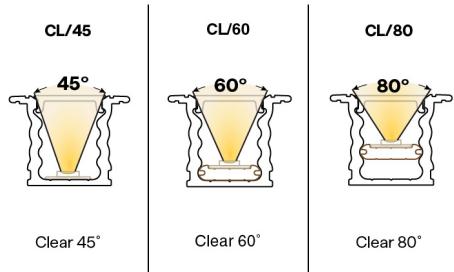


### TEMPERATURE RATINGS


		5.0 W/FT	
		Min	Max
DRY	Ambient Operating Temp - Recessed	-4°F	115°F
	Ambient Operating Temp - Surface	**	**
DMP	Ambient Operating Temp - Recessed	-4°F	110°F
	Ambient Operating Temp - Surface	**	**
WET	Ambient Operating Temp - Recessed	-4°F	110°F
	Ambient Operating Temp - Surface	**	**

### 7 WIRE INPUT/OUTPUT

#### SINGLE (Input only)

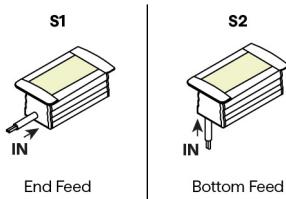

#### PASS THROUGH (Input/Output)

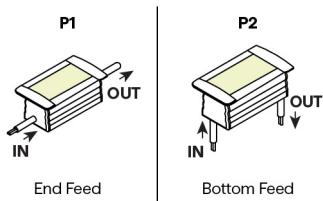




# ESSENTIALS FLUR™-FLAT (01) STATIC COLOR


## 24VDC Linear Fixtures - Recessed

### CONFIGURATION OPTIONS

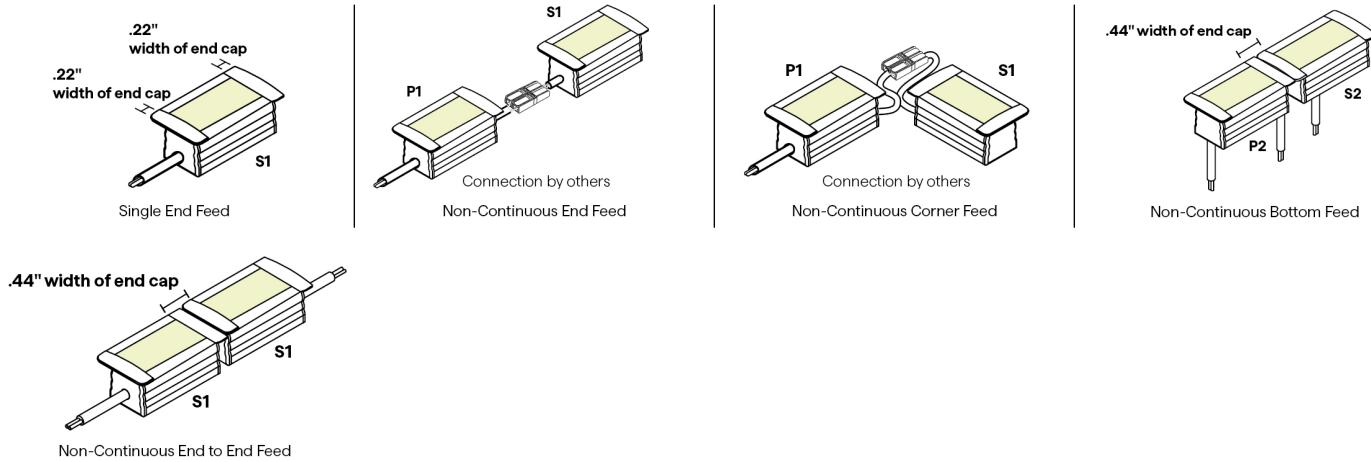


### 8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

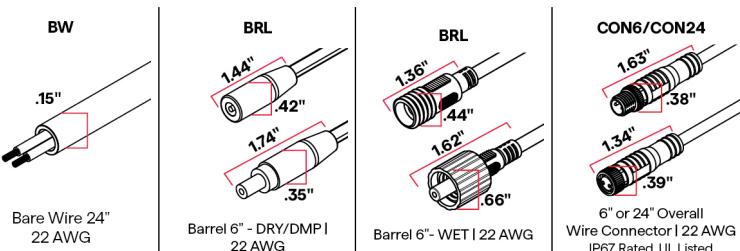

### 12 MOUNTING



Stainless Steel Clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use SST-01

Each clip comes with a #4 x 5/8" Flat Head SS

### 10 WIRE COLOR



White

Black

### 13 FINISH



Satin

Black

Custom finishes require a longer lead time, consult factory



# ESSENTIALS FLUR™-FLAT (01) STATIC COLOR

## 24VDC Linear Fixtures - Recessed

### 14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.



### SC DRY DMP LENGTHS BY INCH

#### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

#### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed
12"	10.41"		10.66"	
13"	12.41"		12.66"	
14"	12.41"		12.66"	
15"	14.41"		14.66"	
16"	14.41"		14.66"	
17"	16.41"		16.66"	
18"	16.41"		16.66"	
19"	18.41"		18.66"	
20"	18.41"		18.66"	
21"	20.41"		20.66"	
22"	20.41"		20.66"	
23"	22.41"		22.66"	
24"	22.41"		22.66"	
36"	34.41"		34.66"	
48"	46.41"		46.66"	
60"	58.41"		58.66"	
72"	70.41"		70.66"	
84"	82.41"		82.66"	
96"	94.41"		94.66"	



# ESSENTIALS FLUR™-FLAT (01) STATIC COLOR

24VDC Linear Fixtures - Recessed

## SC WET LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture	
	S1	End Feed
12"	1"	
13"	0.5"	
14"	1"	
15"	0.5"	
16"	1"	
17"	0.5"	
18"	1"	
19"	0.5"	
20"	1"	
21"	0.5"	
22"	1"	
23"	0.5"	
24"	1"	
36"	1"	
48"	1"	
60"	1"	
72"	1"	
84"	1"	
96"	1"	

### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1	S2	P1	P2
12"	10.61"		10.76"	
13"	12.61"		12.76"	
14"	12.61"		12.76"	
15"	14.61"		14.76"	
16"	14.61"		14.76"	
17"	16.61"		16.76"	
18"	16.61"		16.76"	
19"	18.61"		18.76"	
20"	18.61"		18.76"	
21"	20.61"		20.76"	
22"	20.61"		20.76"	
23"	22.61"		22.76"	
24"	22.61"		22.76"	
36"	34.61"		34.76"	
48"	46.61"		46.76"	
60"	58.61"		58.76"	
72"	70.61"		70.76"	
84"	82.61"		82.76"	
96"	94.61"		94.76"	

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	SC	SC	SC	SC
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1			QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP			Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6			Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle			



# ESSENTIALS FLUR™-FLAT (01) STATIC COLOR

24VDC Linear Fixtures - Recessed

DIMMING PROTOCOL	INDOOR	OUTDOOR
	SC	SC
	SC	SC
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	
ECO System	QTM-eLED(E)	
DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	

## COMPATIBLE MOUNTING ACCESSORIES

<b>HINGE - HMB-M</b>	<b>HINGE - HMB-L</b>	<b>HINGE - HMB-XL</b>	<b>Q-PIVOT</b>	<b>Q-ANGLE</b>	<b>VHB</b>
1.41" .71"	1.46" 1.29"	1.46" 4"	.75" 1.03"	2.23" 1.38"	Double sided mounting tape

Adjustable mounting bracket - Medium      Adjustable mounting bracket - Large      Adjustable mounting bracket - XLarge      Small mounting accessory      Adjustable mounting accessory      Double sided mounting tape

## COMPATIBLE WIRING ACCESSORIES

<b>Q-mini-J</b>	<b>Q-mini-J5</b>	<b>BARREL-EXT</b>	<b>BARREL FOUR-FER</b>	<b>CON120-EXT</b>	<b>CON FOUR-FER</b>	<b>CON M - BARREL F</b>
2" 1.25"	2.80" 2.27"	8ft barrel cable extender	Splits lead from one to four LED Barrel connector fixtures, DRY/DMP	10ft Con cable extender	Splits lead from one to four LED Con connectors	Male con to barrel cable adaptor

UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)      ULL Listed, miniature junction box, DRY/DMP (WET rated with silicone) (WET ONLY)      8ft barrel cable extender DRY ONLY      Splits lead from one to four LED Barrel connector fixtures, DRY/DMP      10ft Con cable extender DRY/DMP/WET      Splits lead from one to four LED Con connectors DRY/DMP/WET      Male con to barrel cable adaptor DRY/DMP



## ESSENTIALS FLUR™-FLAT (01) STATIC COLOR

24VDC Linear Fixtures - Recessed

---

### COMPATIBLE APPS

#### NFC APP



Read and write  
DMX addresses and  
adjust voltage