





ESSENTIALS LALO-OPTICS (02)

RGBW

24VDC Linear Fixtures - Surface & Recessed

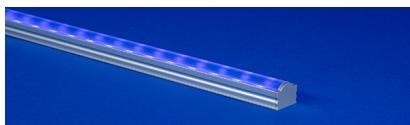

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS	7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL
LL2RGBW	6.0			STD	17DEG									

Sample Part Number: LL2RGBW-6.0-30-DRY-STD-17-P1-BW-BW-BK-CL2-SST-BK-48"-E


1 PRODUCT LL2RGBW See following pages for compatible power supplies.	2 WATTS/FT 6.0 6.0W/ft	3 CCT 27 2700K 30 RGBW-3000K	4 RATED DRY IP20 DMP IP54	5 EFFICIENCY STD Standard	6 LENS 17DEG Optical 17° For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages. For optional snap-on louver ordering, see External Louver Accessory section on following pages
7 WIRE INPUT/OUTPUT S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed	8 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"	9 CONNECTOR/WIRE OUT CLS Closed End (No feed)	10 WIRE COLOR WH White BK Black		
P1 Pass Through 1 (Input/output) - End Feed P2 Pass Through 2 (Input/output) - Bottom Feed	BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"	BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"			
For continuous mounting, consider bottom feed.	BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)			
11 WIRE TYPE CL2 Class 2 CL2P Plenum Rated CL2P only available with bare wire leads (BW)	12 MOUNTING SST Stainless Steel M4 Low Profile Magnet MG Magnet	13 FINISH ST Satin BK Black CU Custom Custom finishes require a longer lead time, consult factory	14 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	15 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	



ESSENTIALS LALO-OPTICS (02) RGBW

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS

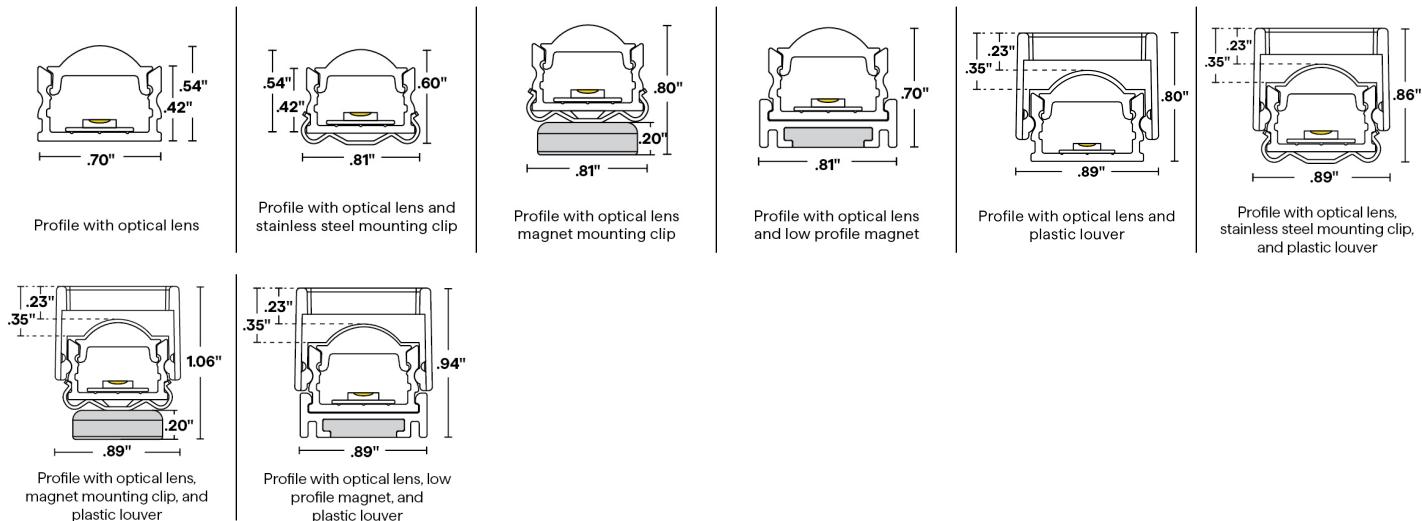

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with LL2RGBW-**-30-DRY-STD

	Red		Green		Blue		3000K	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	CRI
17	40	631	106	513	32	464	135	93

6 DIODE VISIBILITY




Optical lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

17DEG



Optical 17°

TEMPERATURE RATINGS

		6.0 W/FT		4.0 HE W/FT	
		Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	115°F	-4°F	125°F
DMP	Ambient Operating Temp - Surface	-4°F	110°F	-4°F	120°F
WET	Ambient Operating Temp - Surface	**	**	-4°F	120°F




ESSENTIALS LALO-OPTICS (02) RGBW


24VDC Linear Fixtures - Surface & Recessed

7 WIRE INPUT/OUTPUT


SINGLE (Input only)

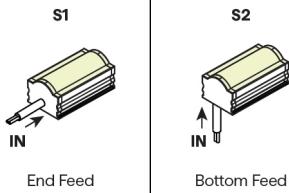


PASS THROUGH (Input/Output)

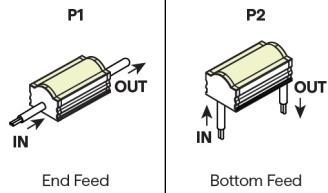


CONFIGURATION OPTIONS

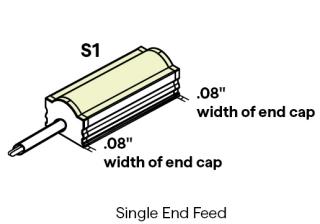


Single End Feed

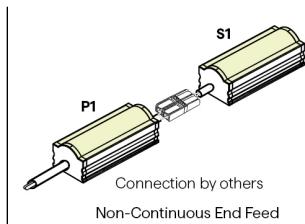


Non-Continuous End Feed

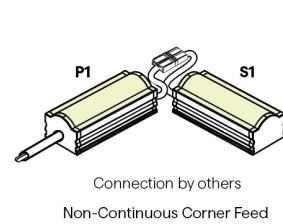

Non-Continuous Corner Feed

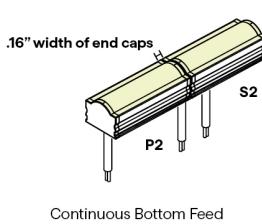


Continuous Bottom Feed

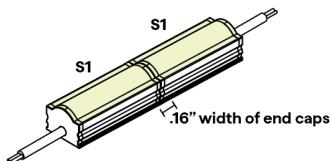

Continuous End to End Feed

8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

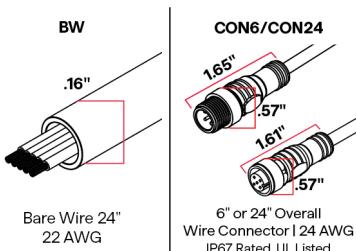

10 WIRE COLOR



White

Black





ESSENTIALS LALO-OPTICS (02) RGBW

24VDC Linear Fixtures - Surface & Recessed

EXTERNAL LOUVER ACCESSORY

PLASTIC

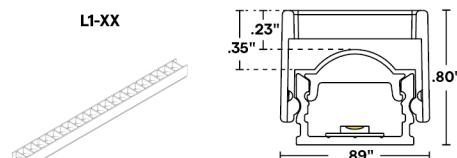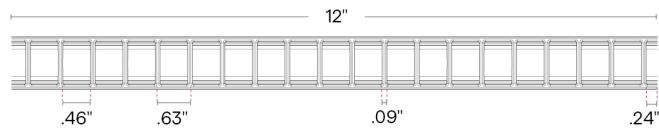


Lumen Multiplier
WH BK

Profile with plastic louver
To order separately use
LALO-L1-OPTICS-KIT-WH or
LALO-L1-OPTICS-KIT-BK

0.73 0.53

12 MOUNTING

SST




Stainless Steel Clip

2 clips provided for 4' or less; 4
clips provided for greater than
4'

To order separately use SST-01

Each clip comes with a #4 x
5/8" Flat Head SS

M4




Low Profile Magnet

One M4 provided per foot.

To order separately use
MG-04

MMA-04




Magnet Mount
Accessory for M4

Sold separately, to order use
MMA-04

Each bracket comes with 2 #6
x 5/8" Flat Head SS

Required when mounting to a
non-magnetic surface

MG



Magnet Clip

One MG provided per foot

To order separately use MG-01

MMA-01



Magnet Mount
Accessory of MG-01

Sold separately, to order use
MMA-01

Each bracket comes with 2 #6
x 5/8" Flat Head SS

Required when mounting to a
non-magnetic surface

13 FINISH



Satin

Black

Custom finishes require a longer
lead time, consult factory



ESSENTIALS LALO-OPTICS (02) RGBW


24VDC Linear Fixtures - Surface & Recessed

14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)


[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

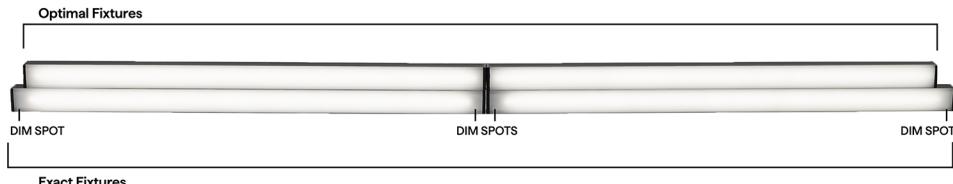

RGBW DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	2"
13"	0.5"
14"	1"
15"	1.5"
16"	2"
17"	0.5"
18"	1"
19"	1.5"
20"	2"
21"	0.5"
22"	1"
23"	1.5"
24"	2"
36"	2"
48"	2"
60"	2"
72"	2"
84"	2"
96"	2"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed
12"	8.51"		8.86"	
13"	12.51"		12.86"	
14"	12.51"		12.86"	
15"	12.51"		12.86"	
16"	12.51"		12.86"	
17"	16.51"		16.86"	
18"	16.51"		16.86"	
19"	16.51"		16.86"	
20"	16.51"		16.86"	
21"	20.51"		20.86"	
22"	20.51"		20.86"	
23"	20.51"		20.86"	
24"	20.51"		20.86"	
36"	32.51"		32.86"	
48"	44.51"		44.86"	
60"	56.51"		56.86"	
72"	68.51"		68.86"	
84"	80.51"		80.86"	
96"	92.51"		92.86"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	
	RGBW, RGBW-HE	
0.1%		QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX
1%		QZ-DALI-DT8
10%		Non-Dim Power Supply with RGBW App Dongle



ESSENTIALS LALO-OPTICS (02) RGBW

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR
	RGBW, RGBW-HE
DMX	QTM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with RGBW App Dongle

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M  1.41" .71"	HINGE - HMB-L  1.46" 1.29"	HINGE - HMB-XL  1.46" 4"	Q-PIVOT  .75" 1.03"	Q-ANGLE  1.38" 2.23"	VHB 	NU-GRAZER 	NJ-GRAZER 	BL-GRAZER  1.23" .75"	MMA-01
--	---	---	--	---	---	---	---	--	---------------

MMA-04



Magnet Mount Accessory
of MG-04

COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature
junction box, DRY/DMP
(WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE  1.36" 2.58"	IQ-DMX-STICK-GA2 	IQ-DMX-STICK-DE3 
Wi-Fi or Bluetooth Connectivity	DMX controller for changing color & dimming	DMX controller for changing color & dimming