




ESSENTIALS LATO-FLAT (01)

STATIC COLOR

24VDC Linear Fixtures - Recessed



- Shallow flanged recessed fixture
- Choose from diffused, polar, frosted, or clear lens options for varying diode visibility and beam angles
- Flanged design merges light source with surface
- Stainless steel mounting clips
- Features painted end caps to match extrusion finish
- Red, Green, Blue or Amber LEDs available
- FWC Q-Tran Red & Amber LED products are Florida Fish and Wildlife Conservation Commission certified, making them safe for turtles and other wildlife
- Can be suitable for exterior use when specified as wet, contact factory for more information

1 PRODUCT	2 WATTS/FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS	7 WIRE INPUT/OUTPUT	8 CONNECTOR/WIRE IN	9 CONNECTOR/WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/OPTIMAL
LT1SC	5.0										SST			

Sample Part Number: LT1SC-5.0-GR-DRY-WO-DF-P1-BW-BW-BK-CL2-SST-BK-48"-E


1 PRODUCT LT1SC See following pages for compatible power supplies.	2 WATTS/FT 5.0 5.0W/ft	3 CCT A Amber B Blue G Green R Red	4 RATED DRY IP20 B IP54 G IP67 WET	5 EFFICIENCY STD Standard WO White Optics WhiteOptics - Internal coating, greater lumen output	6 LENS DF Diffused PR Polar FR Frosted CL Clear
For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages					
7 WIRE INPUT/OUTPUT S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed	8 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"	9 CONNECTOR/WIRE OUT CLS Closed End (No feed)	10 WIRE COLOR WH White BK Black N/A For Barrel wet barrel only available in black		
For continuous mounting, consider bottom feed.					
BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)					
11 WIRE TYPE CL2 Class 2 CL2P Plenum Rated N/A For Barrel CL2P only available with bare wire leads (BW)	12 MOUNTING SST Stainless Steel	13 FINISH ST Satin BK Black BZ Bronze CU Custom Custom finishes require a longer lead time, consult factory	14 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	15 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	



ESSENTIALS LATO-FLAT (01) STATIC COLOR

24VDC Linear Fixtures - Recessed

1 PRODUCT - DIMENSIONS

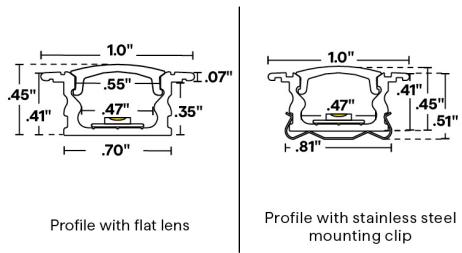

2 DELIVERED LUMENS


[Calculated L70 = 30000 hrs]
Tested with LT1SC-5.0-**-DRY-STD

	Red		Green		Blue		Amber	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH
CL	81	633	436	517	113	466	73	597
FR	80	633	434	517	113	466	73	597
PR	67	633	363	517	94	466	61	597
DF	64	633	344	517	89	466	57	597

[Calculated L70 = 30000 hrs]
Tested with LT1SC-5.0-**-DRY-W/O

	Red		Green		Blue		Amber	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH
CL	87	633	469	517	122	466	78	597
FR	86	633	465	517	121	466	78	597
PR	80	633	432	517	112	466	72	597
DF	68	633	370	517	96	466	62	597

6 DIODE VISIBILITY





ESSENTIALS LATO-FLAT (01) STATIC COLOR

24VDC Linear Fixtures - Recessed

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

CL




Clear 100°

TEMPERATURE RATINGS


		5.0 W/FT	
		Min	Max
DRY	Ambient Operating Temp - Recessed	-4°F	115°F
	Ambient Operating Temp - Surface	**	**
DMP	Ambient Operating Temp - Recessed	-4°F	110°F
	Ambient Operating Temp - Surface	**	**
WET	Ambient Operating Temp - Recessed	-4°F	110°F
	Ambient Operating Temp - Surface	**	**

7 WIRE INPUT/OUTPUT

SINGLE (Input only)



PASS THROUGH (Input/Output)






ESSENTIALS LATO-FLAT (01) STATIC COLOR


24VDC Linear Fixtures - Recessed

CONFIGURATION OPTIONS

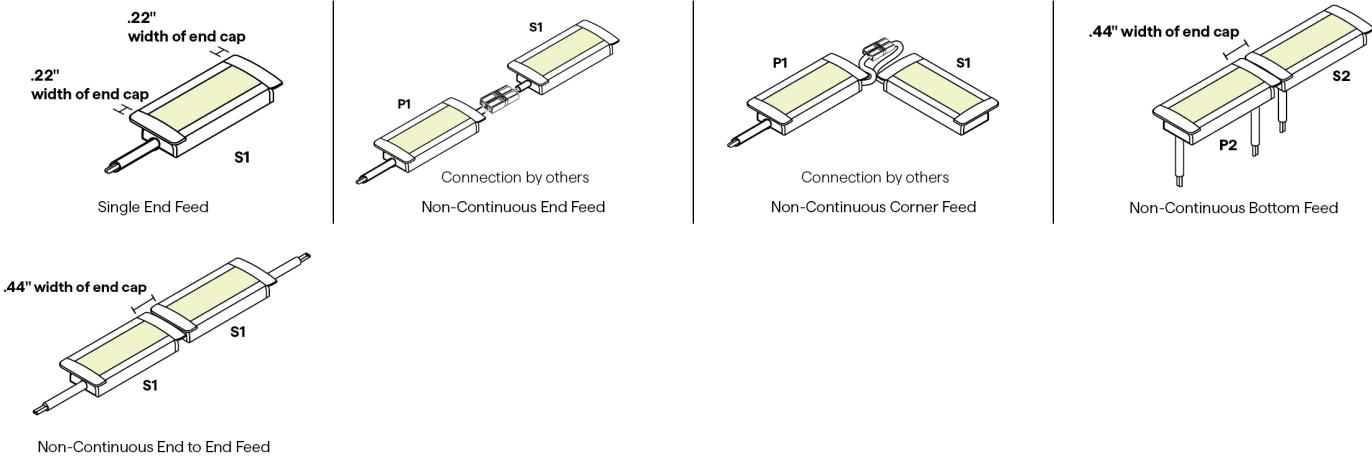

8 / 9 CONNECTOR/WIRE - IN/OUT


Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

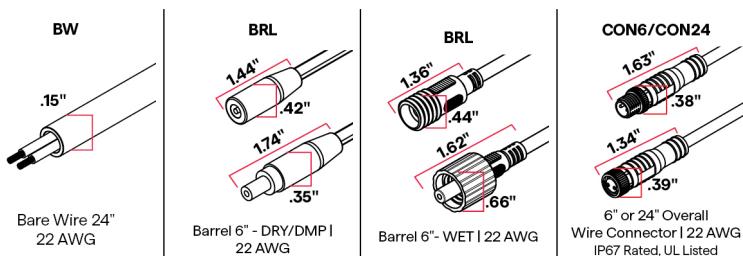

10 WIRE COLOR



12 MOUNTING




Stainless Steel Clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use SST-01

Each clip comes with a #4 x 5/8" Flat Head SS

13 FINISH



Custom finishes require a longer lead time, consult factory



ESSENTIALS LATO-FLAT (01) STATIC COLOR


24VDC Linear Fixtures - Recessed

14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

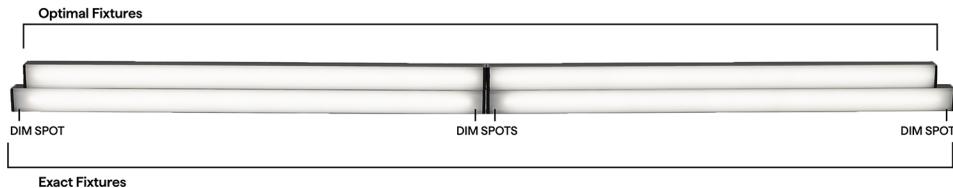

SC DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed
12"	10.41"		10.66"	
13"	12.41"		12.66"	
14"	12.41"		12.66"	
15"	14.41"		14.66"	
16"	14.41"		14.66"	
17"	16.41"		16.66"	
18"	16.41"		16.66"	
19"	18.41"		18.66"	
20"	18.41"		18.66"	
21"	20.41"		20.66"	
22"	20.41"		20.66"	
23"	22.41"		22.66"	
24"	22.41"		22.66"	
36"	34.41"		34.66"	
48"	46.41"		46.66"	
60"	58.41"		58.66"	
72"	70.41"		70.66"	
84"	82.41"		82.66"	
96"	94.41"		94.66"	



ESSENTIALS LATO-FLAT (01) STATIC COLOR

24VDC Linear Fixtures - Recessed

SC WET LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture	
	S1	End Feed
12"	1"	
13"	0.5"	
14"	1"	
15"	0.5"	
16"	1"	
17"	0.5"	
18"	1"	
19"	0.5"	
20"	1"	
21"	0.5"	
22"	1"	
23"	0.5"	
24"	1"	
36"	1"	
48"	1"	
60"	1"	
72"	1"	
84"	1"	
96"	1"	

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1	S2	P1	P2
12"	10.61"		10.76"	
13"	12.61"		12.76"	
14"	12.61"		12.76"	
15"	14.61"		14.76"	
16"	14.61"		14.76"	
17"	16.61"		16.76"	
18"	16.61"		16.76"	
19"	18.61"		18.76"	
20"	18.61"		18.76"	
21"	20.61"		20.76"	
22"	20.61"		20.76"	
23"	22.61"		22.76"	
24"	22.61"		22.76"	
36"	34.61"		34.76"	
48"	46.61"		46.76"	
60"	58.61"		58.76"	
72"	70.61"		70.76"	
84"	82.61"		82.76"	
96"	94.61"		94.76"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	SC	SC	SC	SC
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1			QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP			Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6			Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle			



ESSENTIALS LATO-FLAT (01) STATIC COLOR

24VDC Linear Fixtures - Recessed

DIMMING PROTOCOL	INDOOR		OUTDOOR	
	SC		SC	
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND		Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND	
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1		Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V	
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP		Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V	
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN			
ECO System	QTM-eLED(E)			
DMX	QZ-DMX		Q-SET-QZ-DMX QZ-DMX	
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6		Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6	
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle			

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M	HINGE - HMB-L	HINGE - HMB-XL	Q-PIVOT	Q-ANGLE
1.41" .71"	1.46" 1.29"	1.46" 4"	.75" 1.46" 1.03"	2.23" 1.38" 1.03"

Adjustable mounting bracket - Medium Adjustable mounting bracket - Large Adjustable mounting bracket - XLarge Small mounting accessory Adjustable mounting accessory

COMPATIBLE WIRING ACCESSORIES

Q-mini-J 2" 1.25"	Q-mini-J5 2.80" 2.27"	BARREL-EXT 8ft barrel cable extender	BARREL FOUR-FER Splits lead from one to four LED Barrel connector fixtures, DRY/DMP/WET	CON120-EXT 10ft Con cable extender, DRY/DMP/WET	CON FOUR-FER Splits lead from one to four LED Con connectors, DRY/DMP/WET	CON M - BARREL F Male con to barrel cable adaptor, DRY/DMP
UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	ULL Listed, miniature junction box, DRY/DMP (WET rated with silicone)					



ESSENTIALS LATO-FLAT (01) STATIC COLOR

24VDC Linear Fixtures - Recessed

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage